


Tutorial Based on Book, December 2014

Download OpenModelica Software

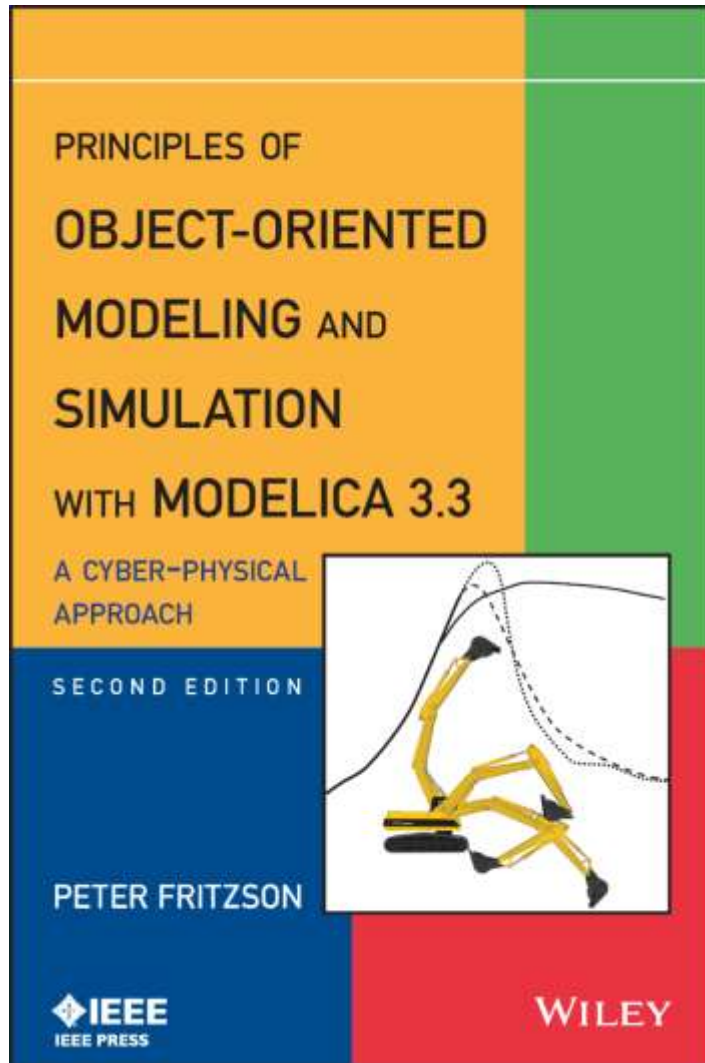

Peter Fritzson

Principles of Object Oriented Modeling and Simulation with Modelica 3.3


A Cyber-Physical Approach

Can be ordered from Wiley or Amazon

Wiley-IEEE Press, 2014, 1250 pages

- OpenModelica
 - www.openmodelica.org
- Modelica Association
 - www.modelica.org

Chinese Translation Published year 2021

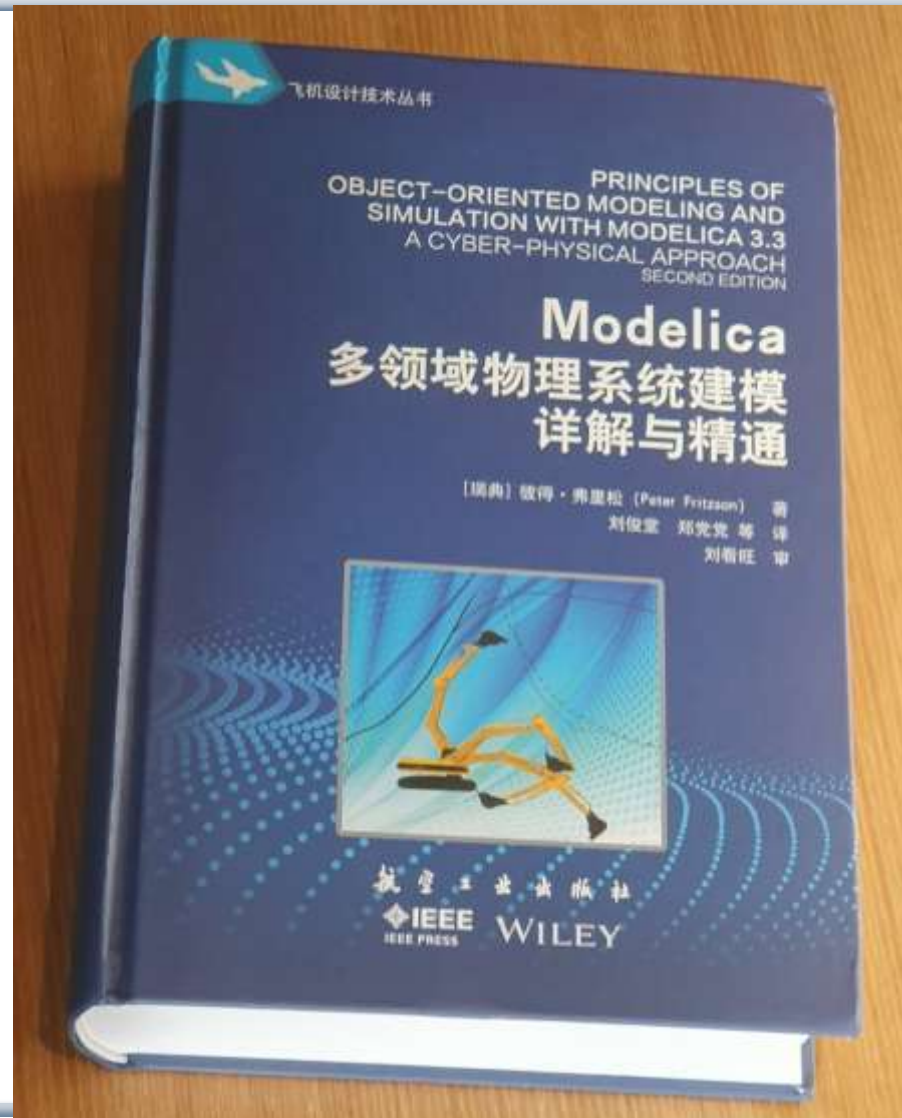

Introductory Modelica Book

September 2011
232 pages


Translations
available in
Chinese,
Japanese,
Spanish

Wiley
IEEE Press

**For Introductory
Short Courses on
Object Oriented
Mathematical Modeling**



Introduction to
Modeling and Simulation
of Technical and
Physical Systems
with Modelica

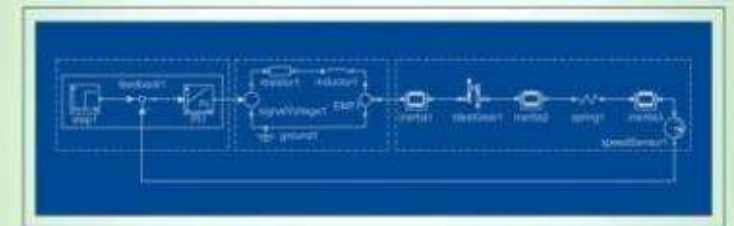

PETER FRITZSON

WILEY

IEEE
IEEE PRESS

Acknowledgements, Usage, Copyrights

- If you want to use the PowerPoint version of these slides in your own course, send an email to: peter.fritzson@liu.se
- Thanks to Emma Larsdotter Nilsson, Peter Bunus, David Broman, Jan Brugård, Mohsen-Torabzadeh-Tari, Adeel Asghar, Lena Buffoni, Adrian Pop, Arunkumar Palanisamy, John Tinnerholm for contributions to these slides.
- Most examples and figures in this tutorial are adapted with permission from Peter Fritzson's book "Principles of Object Oriented Modeling and Simulation with Modelica 3.3", copyright Wiley-IEEE Press
- Some examples and figures reproduced with permission from Modelica Association, Martin Otter, Hilding Elmqvist, Wolfram MathCore, Siemens
- Modelica Association: www.modelica.org
- OpenModelica: www.openmodelica.org

Outline

Part I

Introduction to Modelica and a demo example




Part II

Modelica environments




Part III

Modelica language concepts and textual modeling

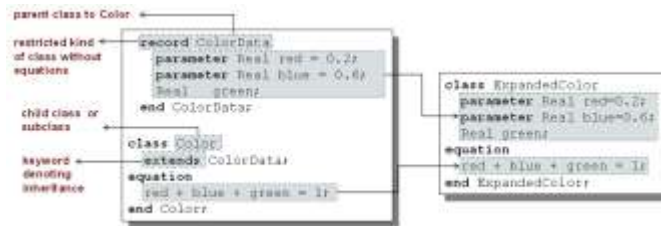


Part IV

Graphical modeling and the Modelica standard library

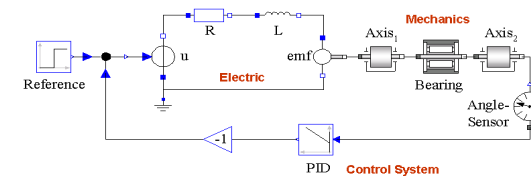

Software Installation - Windows

- Start the software installation
- Install OpenModelica-1.24.3 or later Download from www.openmodelica.org (takes about 20min)
- The Modelica library is typically loaded by default
- Otherwise you also need to load the Modelica standard library if not already loaded: (push the load library button and select Modelica)

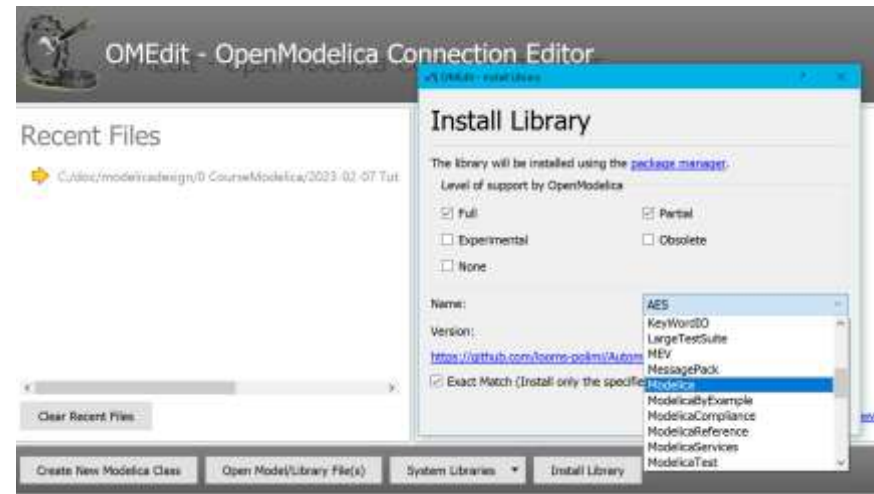

Software Installation – Linux (requires internet connection)


- Go to <https://openmodelica.org/index.php/download/download-linux> and follow the instructions.

Software Installation – MAC (requires internet connection)

- Go to <https://openmodelica.org/index.php/download/download-mac> and follow the instructions.

Part I

Introduction to Modelica and a demo example

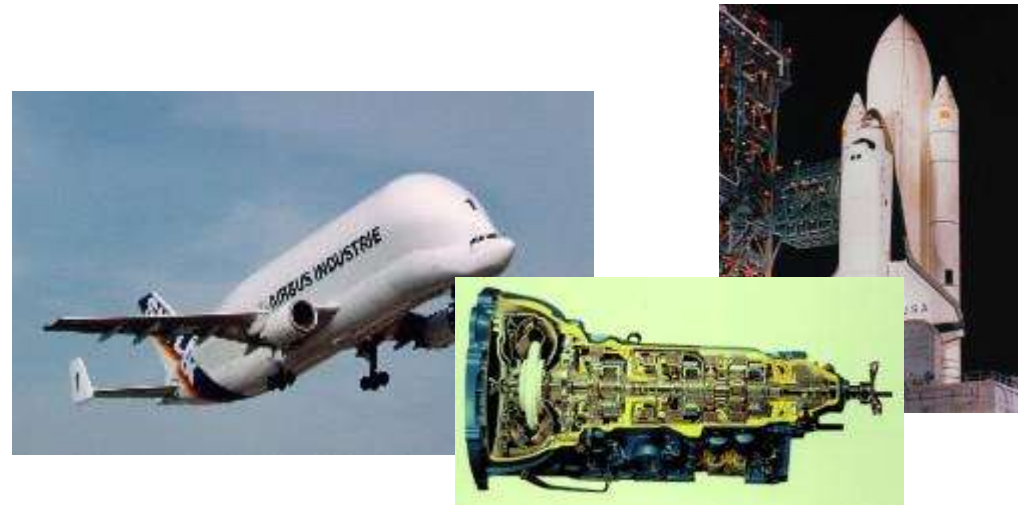

Modelica Background: Stored Knowledge

Model knowledge is stored in books and human minds which computers cannot access

Internal-combustion engines 417

Thermodynamic comparative cycle as shown in the p-V- and T-S diagrams

from T_2 to T_2' , supplied by the heat exchanger is coupled with a thermal exchange (4 → 4'). If heat is completely exchanged, the quantity of heat to be added per unit of gas is reduced to

$$q_{in} = c_p \cdot (T_3 - T_2) = c_p \cdot (T_3 - T_2')$$

and the quantity of heat to be removed is

$$q_{out} = c_p \cdot (T_4 - T_1) = c_p \cdot (T_4' - T_1)$$

The maximum thermal efficiency for the gas turbine with heat exchanger is:

$$\eta_{th} = 1 - Q_{out}/Q_{in} = 1 - (T_4 - T_1)/(T_3 - T_2)$$

Where $p_2/p_1 = (T_2/T_1)^{\frac{\gamma}{\gamma-1}} = (T_2'/T_1)^{\frac{\gamma}{\gamma-1}}$ and $T_4 = T_3 \cdot (T_1/T_2)$ thus

$$\eta_{th} = 1 - (T_2/T_3)$$

Current gas-turbine powerplants achieve thermal efficiencies of up to 35%.

Advantages of the gas turbine: clean exhaust without supplementary emissions-control devices; extremely smooth running; multifuel capability; good static torque curve; extended maintenance intervals.

Disadvantages: manufacturing costs still high; poor transitional response; higher fuel consumption; less suitable for low-power applications.


Gas turbine 1 Filter and silencer, 2 Radial-flow compressor, 3 Burner, 4 Heat exchanger, 5 Exhaust port, 6 Reduction gearbox, 7 Power turbine, 8 Adjustable guide vanes, 9 Compressor shaft, 10 Starter, 11 Auxiliary equipment drive, 12 Lubricating oil pump

“The change of motion is proportional to the motive force impressed”
 – Newton

Lex. II.
Mutationem motus proportionalem esse vi motrici impressae, & fieri secundum lineam rectam qua vis illa imprimitur.

Modelica Background: The Form – Equations

- Equations were used in the third millennium B.C.
- Equality sign was introduced by Robert Recorde in 1557

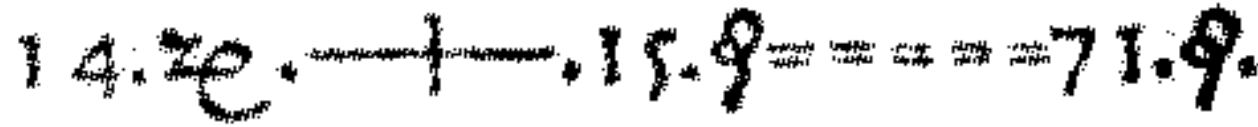

Newton still wrote text (Principia, vol. 1, 1686)

“The change of motion is proportional to the motive force impressed”

CSSL (1967) introduced a special form of “equation”:

variable = expression



$v = \text{INTEG}(F) / m$

Programming languages usually do not allow equations!

What is Modelica?


A language for modeling of **complex cyber-physical systems**

- Robotics
- Automotive
- Aircrafts
- Satellites
- Power plants
- Systems biology

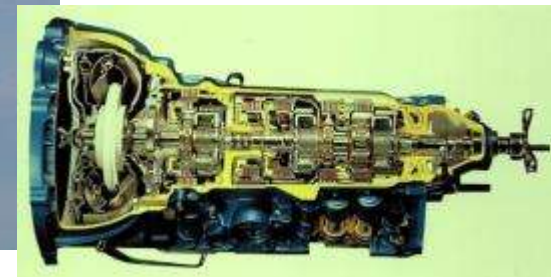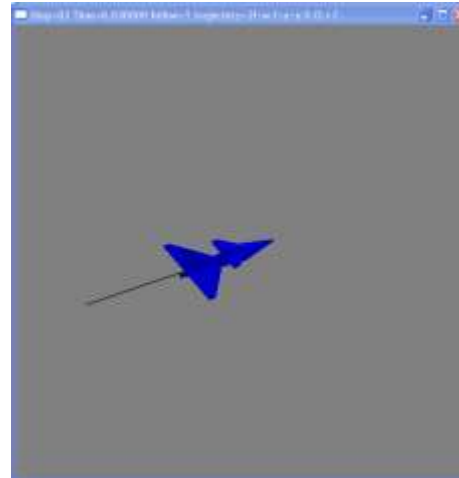

What is Modelica?

A language for **modeling** of complex cyber-physical systems

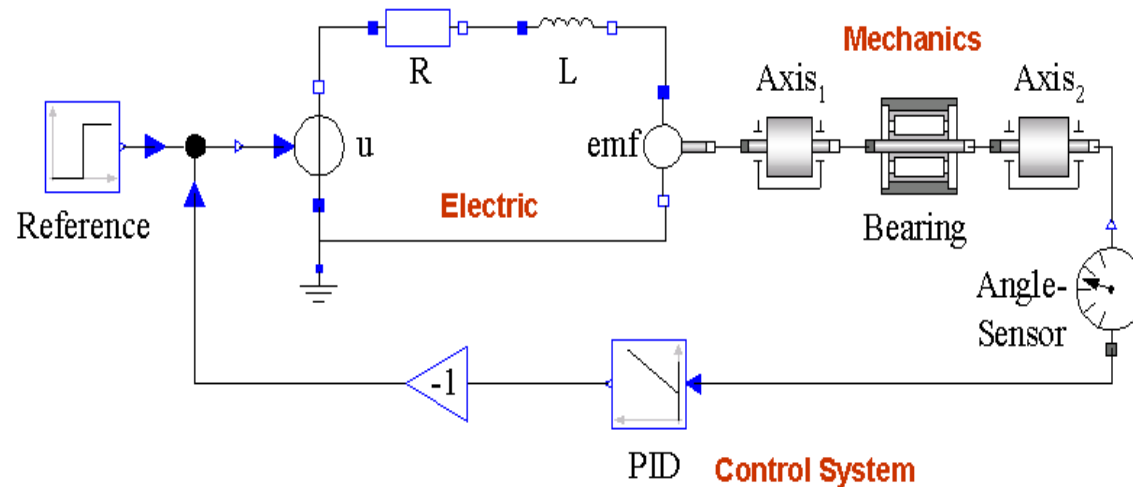

Primary designed for **simulation**, but there are also other usages of models, e.g. optimization.

What is Modelica?

A language for modeling of complex cyber-physical systems

i.e., Modelica is not a tool

Free, open language specification:



Available at: www.modelica.org

*Developed and standardized
by Modelica Association*

**There exist one free and several commercial tools,
for example:**

- **OpenModelica from OSMC**
(also in ABB Optimax, Bosch-Rexroth Control Edge Designer, Mike DHI)
- Dymola from Dassault systems
- Wolfram System Modeler from Wolfram MathCore
- SimulationX from ITI, part of ESI Group
- MapleSim from MapleSoft (also in Altair solidThinking Activate)
- AMESIM from LMS
- Impact from Modelon (also in ANSYS Simplorer, Rickardo tool, etc.)
- MWORKS from Tongyang Sw & Control
- IDA Simulation Env, from Equa

Modelica – The Next Generation Modeling Language

Declarative statically typed language

Equations and mathematical functions allow acausal modeling,
high level specification and static type checking for increased correctness

Multi-domain modeling

Combine electrical, mechanical, thermodynamic, hydraulic,
biological, control, event, real-time, etc...

Everything is a class

Safe engineering practices by statically typed object-oriented language,
general class concept, Java & MATLAB-like syntax

Visual component programming

Hierarchical system architecture capabilities

Efficient, non-proprietary

Efficiency comparable to C; advanced equation compilation,
e.g. 300 000 equations, ~150 000 lines on standard PC

Modelica Acausal Modeling

What is *acausal* modeling/design?

Why does it increase *reuse*?

The acausality makes Modelica library classes *more reusable* than traditional classes containing assignment statements where the input-output causality is fixed.

Example: a resistor *equation*:

$$\mathbf{R * i = v;}$$

can be used in three ways:

$$\mathbf{i := v/R;}$$

$$\mathbf{v := R*i;}$$

$$\mathbf{R := v/i;}$$

What is Special about Modelica?


- Multi-Domain Modeling
- Visual acausal hierarchical component modeling
- Typed declarative equation-based textual language
- Hybrid modeling and simulation

What is Special about Modelica?

Multi-Domain
Modeling

Cyber-Physical Modeling

- 3 domains
- electric
- mechanics
- control

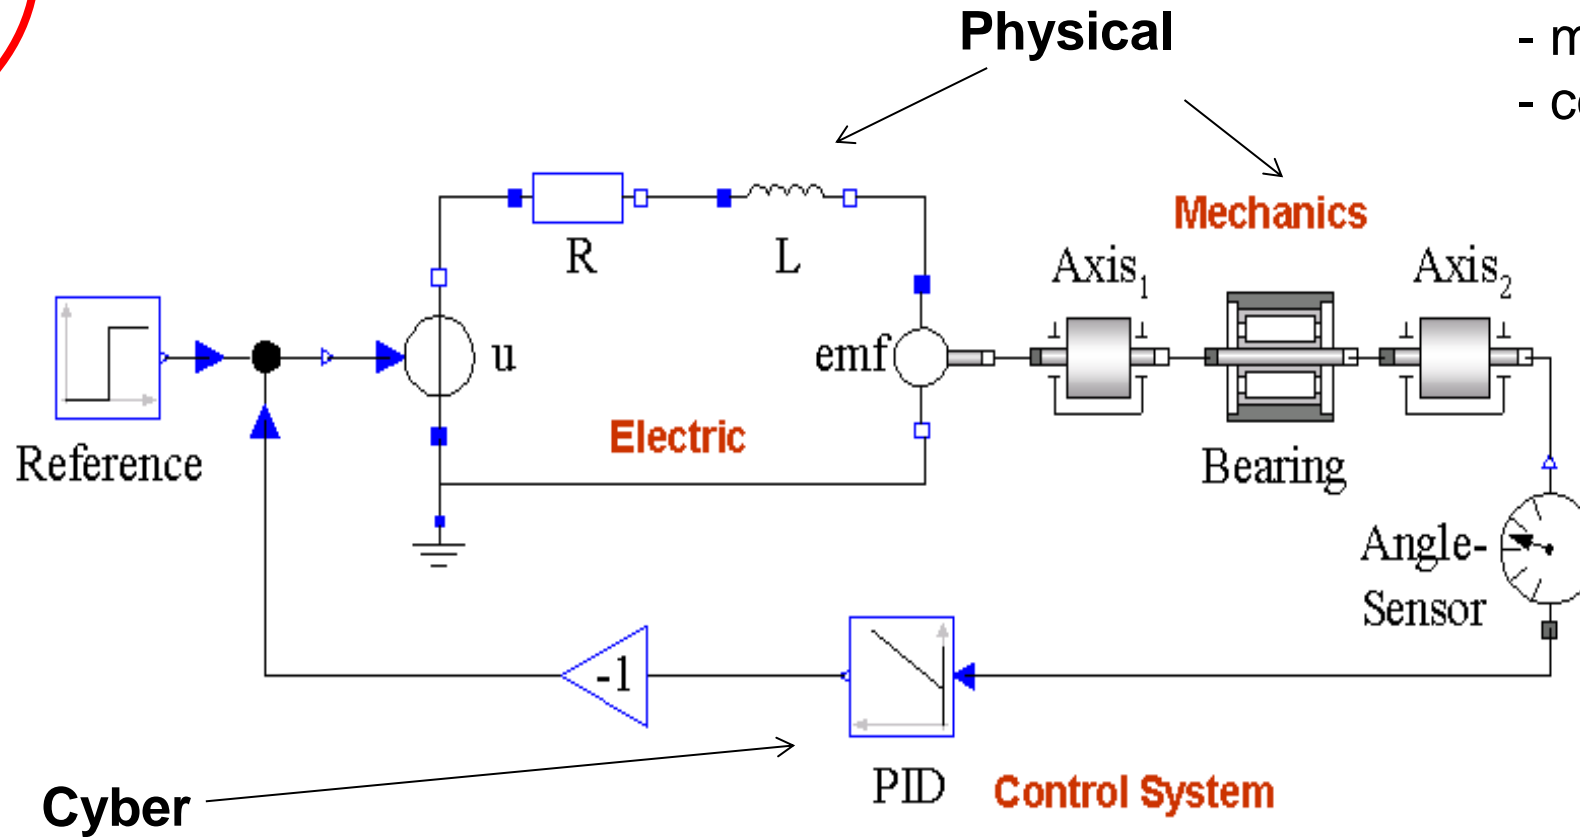


What is Special about Modelica?


Multi-Domain
Modeling

Visual Acausal
Hierarchical
Component
Modeling

Acausal model
(Modelica)

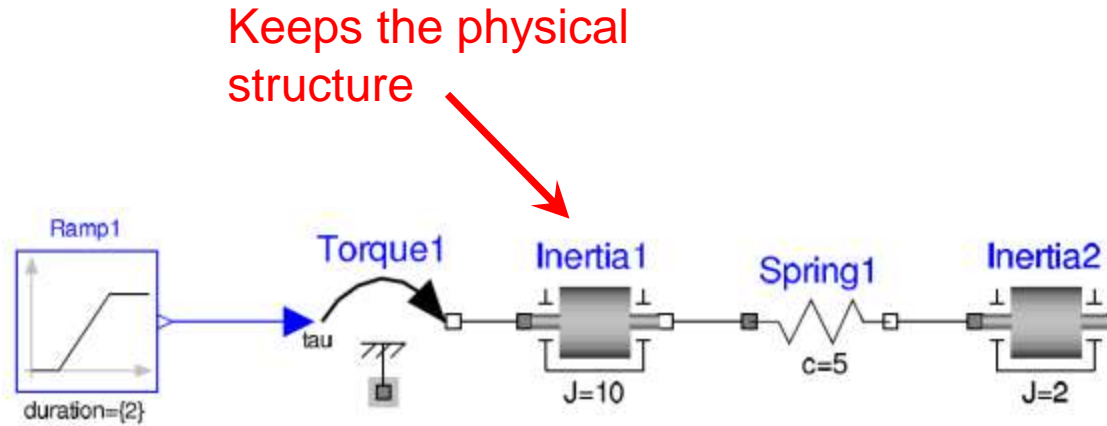

Causal
block-based
model
(Simulink)

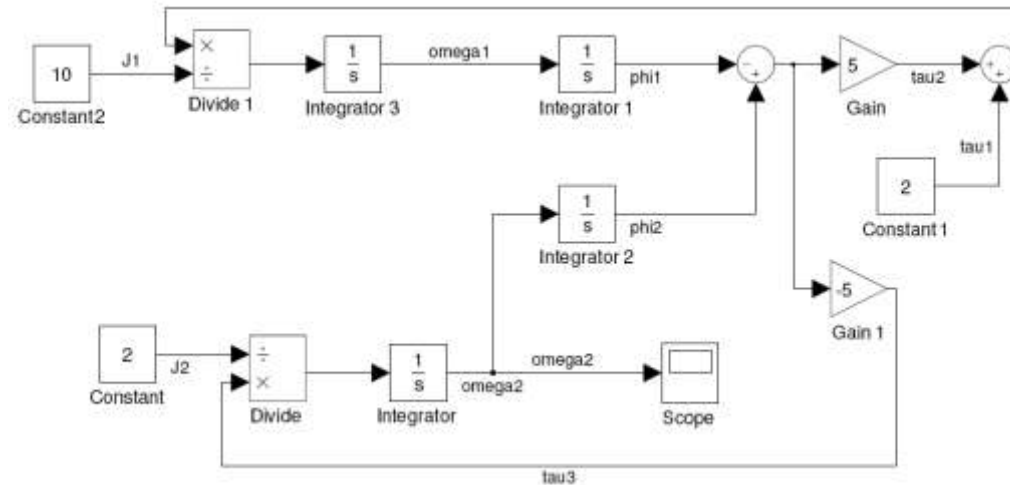


What is Special about Modelica?

Multi-Domain
Modeling

Hierarchical system
modeling

Visual Acausal
Hierarchical
Component
Modeling

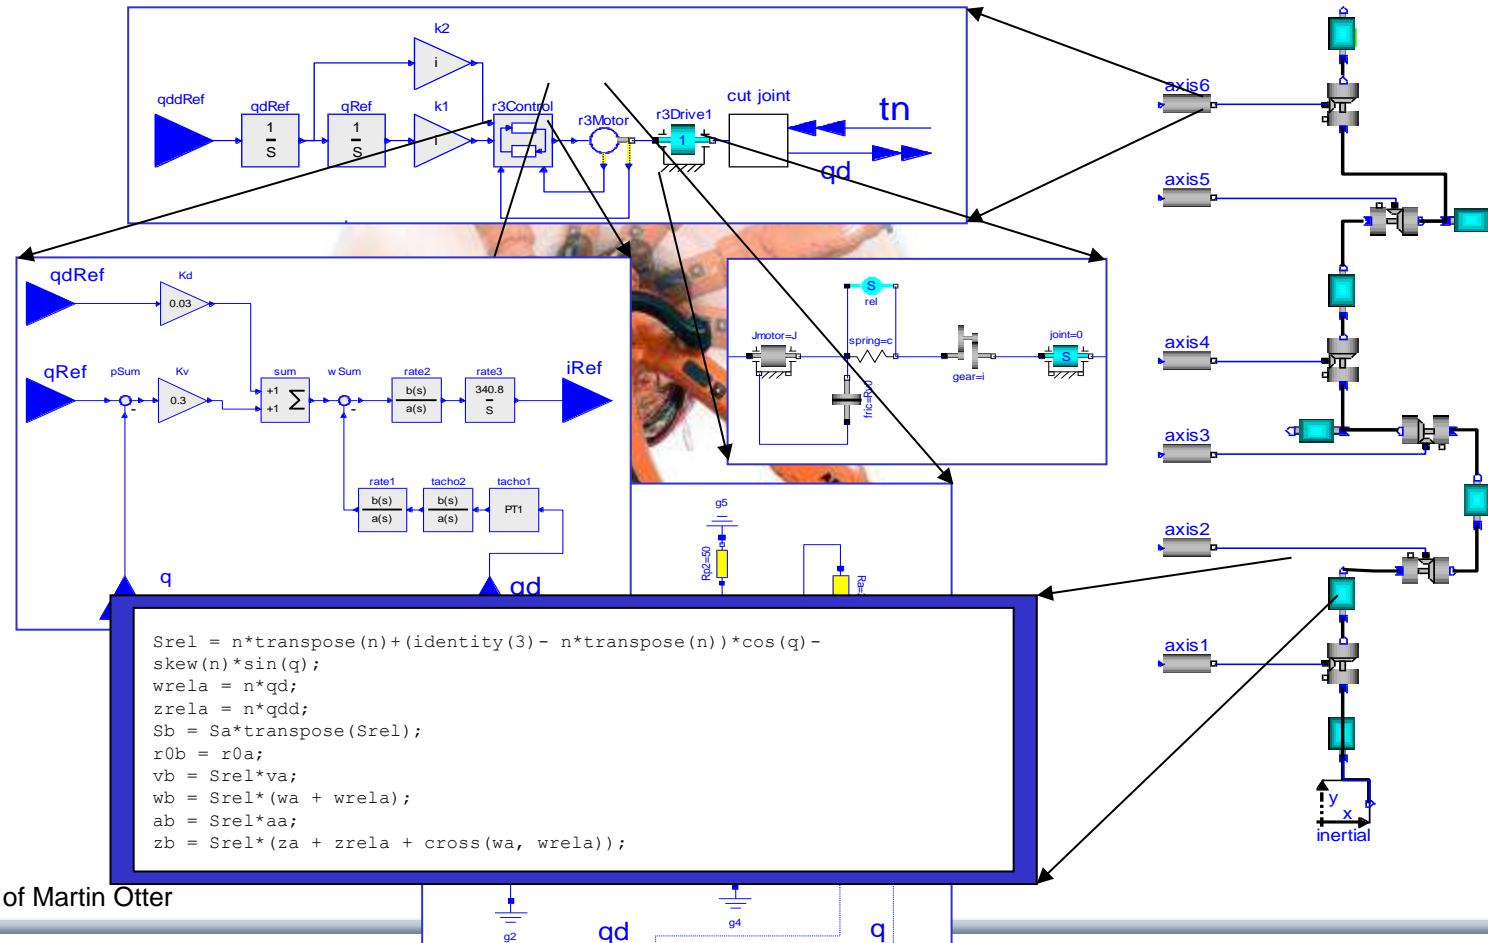

Courtesy of Martin Otter

What is Special about Modelica?

Multi-Domain
Modeling

Visual Acausal
Hierarchical
Component
Modeling

A textual *class-based* language
OO primary used for as a structuring concept

Behavior described declaratively using

- Differential algebraic equations (DAE) (continuous-time)
- Event triggers (discrete-time)

Variable
declarations

```
class VanDerPol "Van der Pol oscillator model"  
  Real x(start = 1) "Descriptive string for x";  
  Real y(start = 1) "y coordinate";  
  parameter Real lambda = 0.3;  
equation  
  der(x) = y;  
  der(y) = -x + lambda*(1 - x*x)*y;  
end VanDerPol;
```


Differential equations

Typed
Declarative
Equation-based
Textual Language


What is Special about Modelica?

Multi-Domain
Modeling

Visual Acausal
Component
Modeling

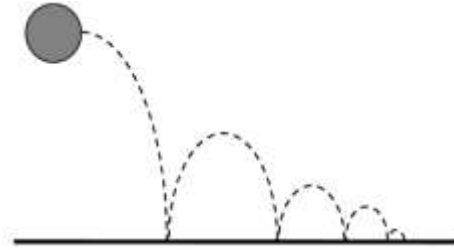

Hybrid modeling =
continuous-time + discrete-time modeling

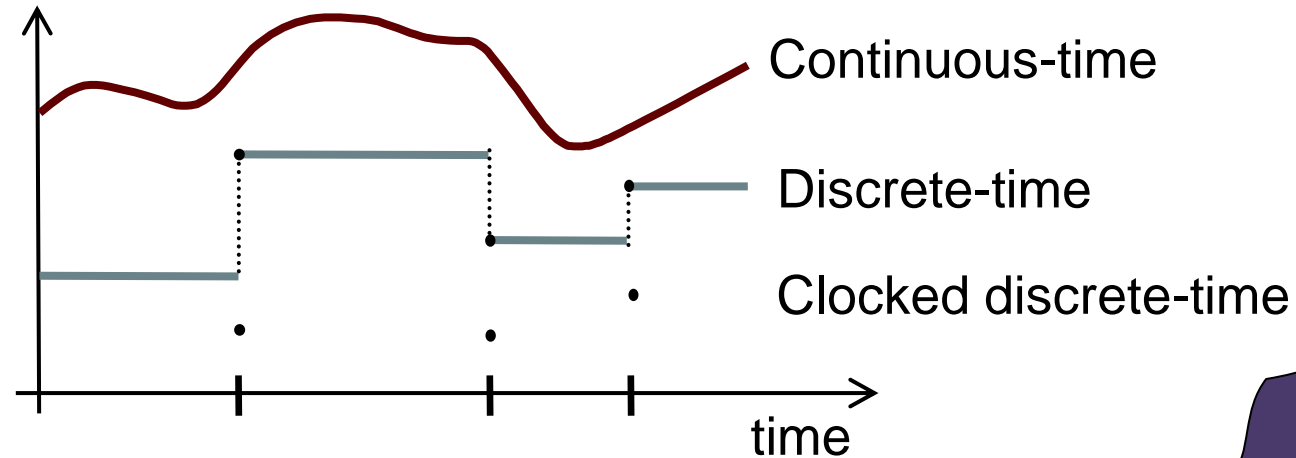


Typed
Declarative
Equation-based
Textual Language

Hybrid
Modeling

Modelica – Faster Development, Lower Maintenance than with Traditional Tools

Block Diagram (e.g. Simulink, ...) or Proprietary Code (e.g. Ada, Fortran, C,...)
vs Modelica

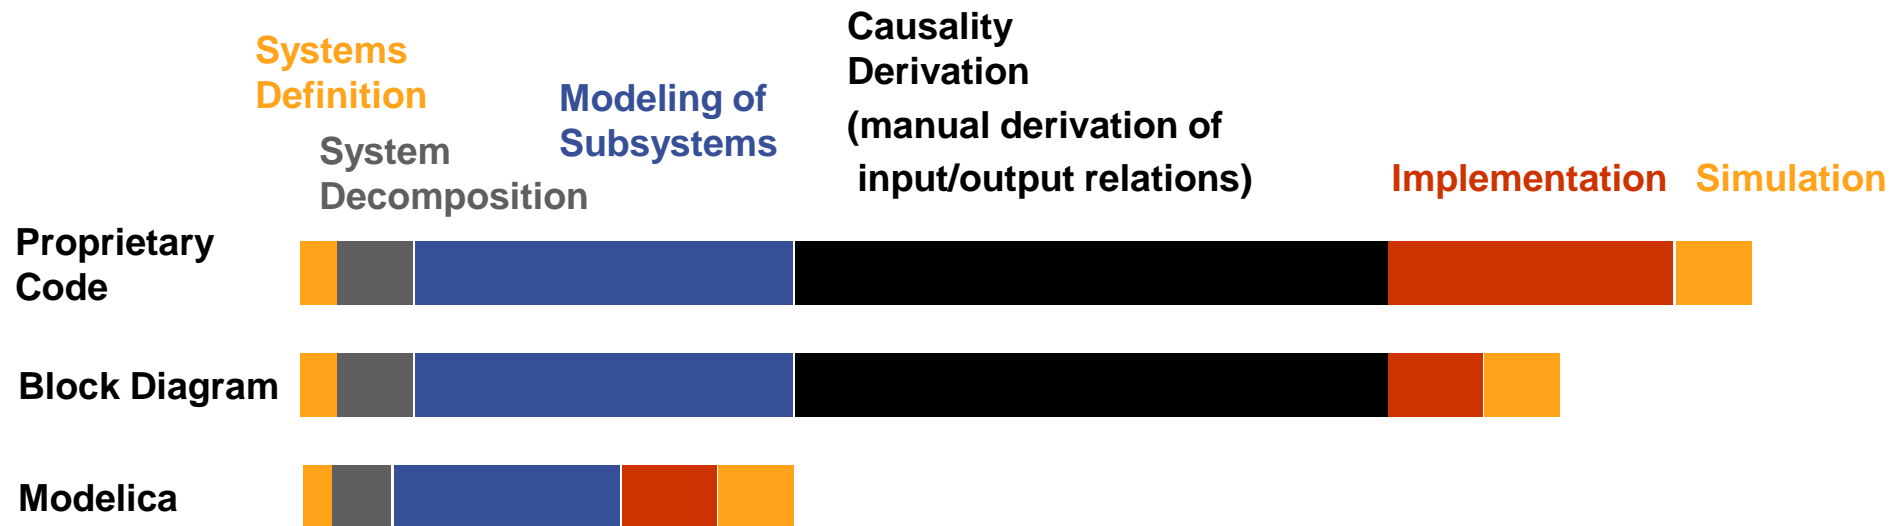


Modelica vs Simulink Block Oriented Modeling


Simple Electrical Model

Modelica:
Physical model –
easy to understand


Keeps the
physical
structure

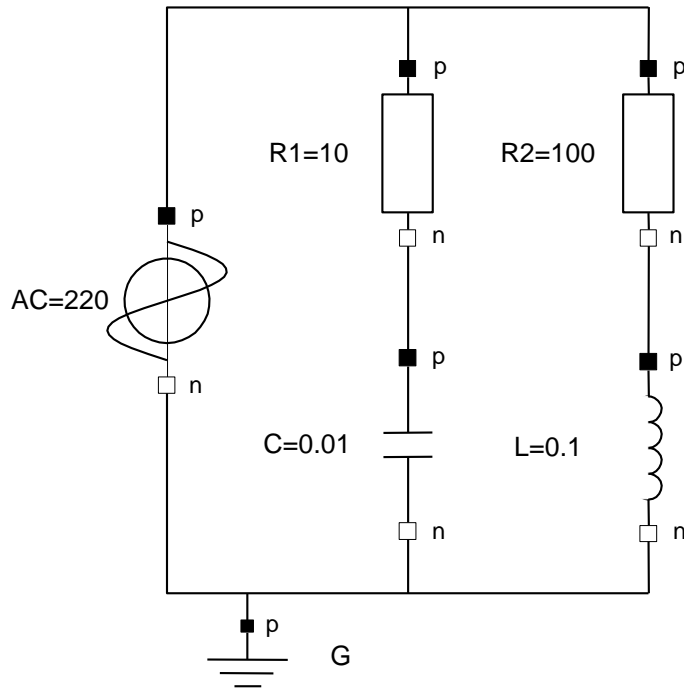


Simulink:
Signal-flow model – hard to
understand

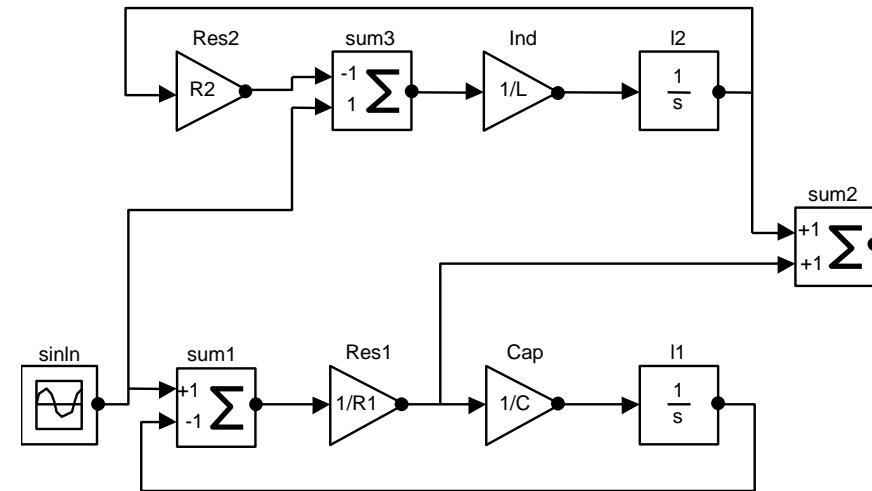

Graphical Modeling - Using Drag and Drop Composition

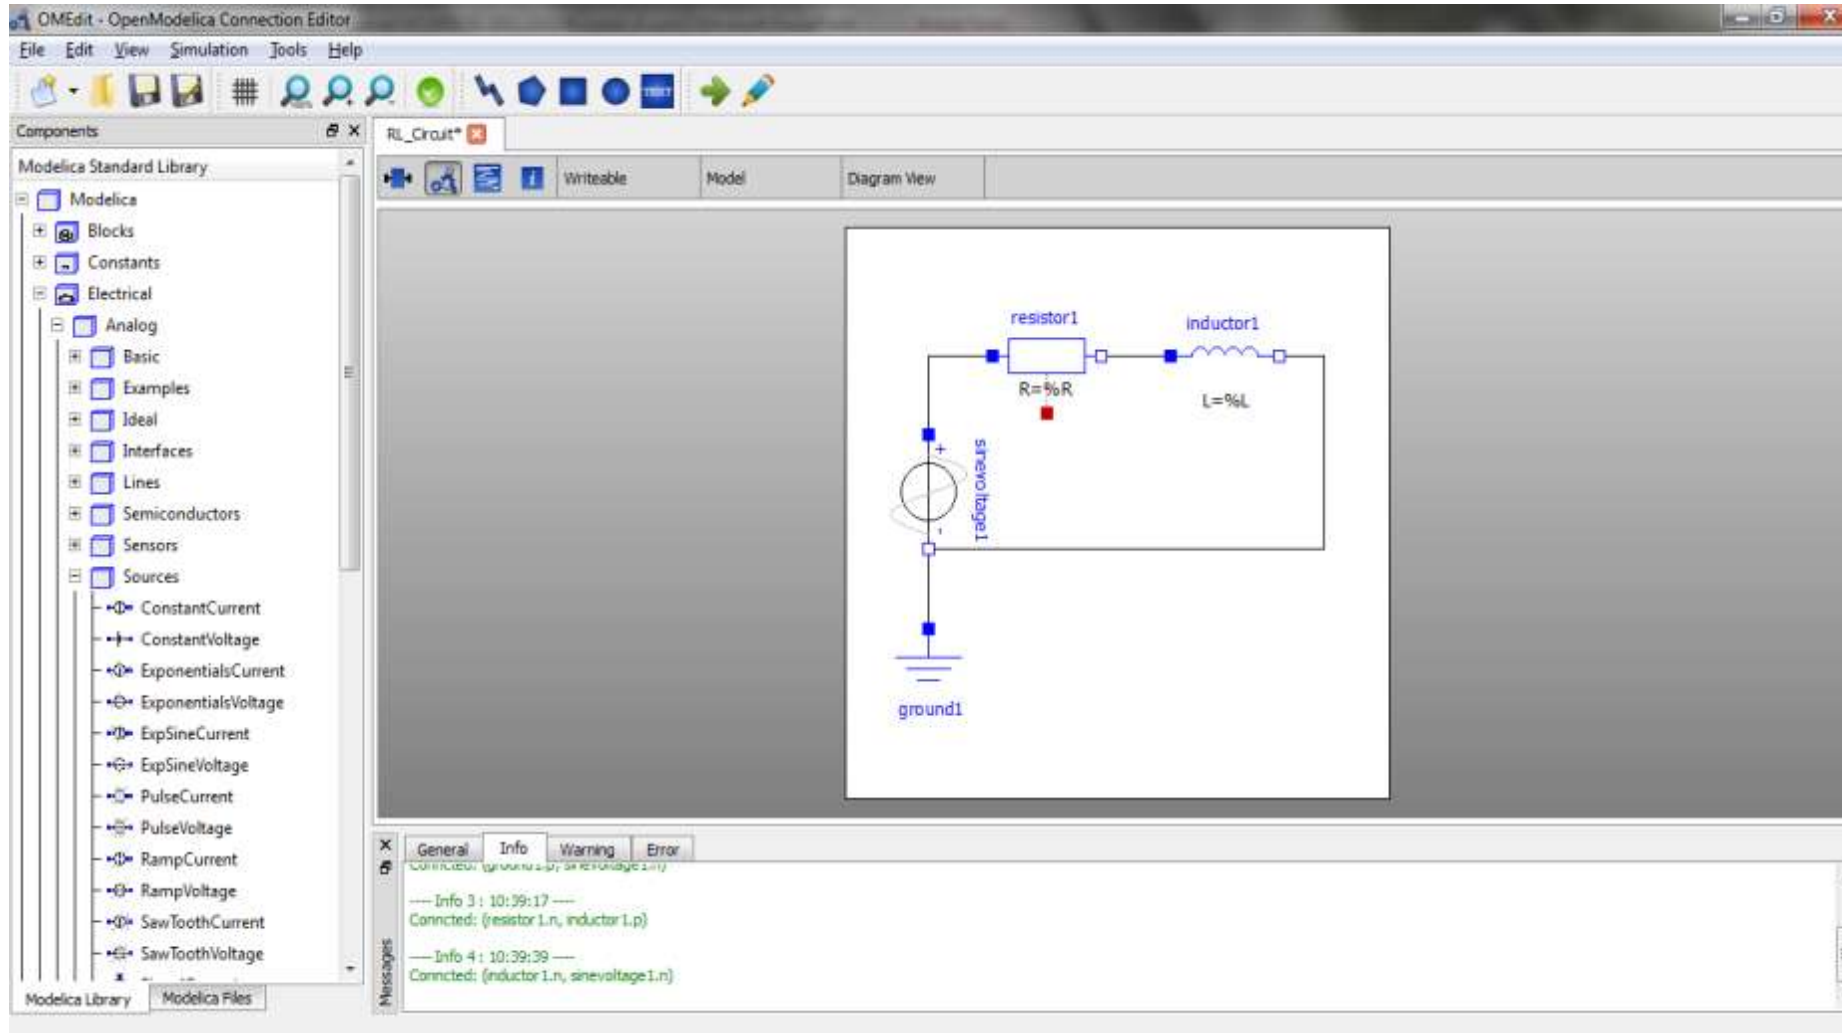

Graphical Modeling with OpenModelica Environment

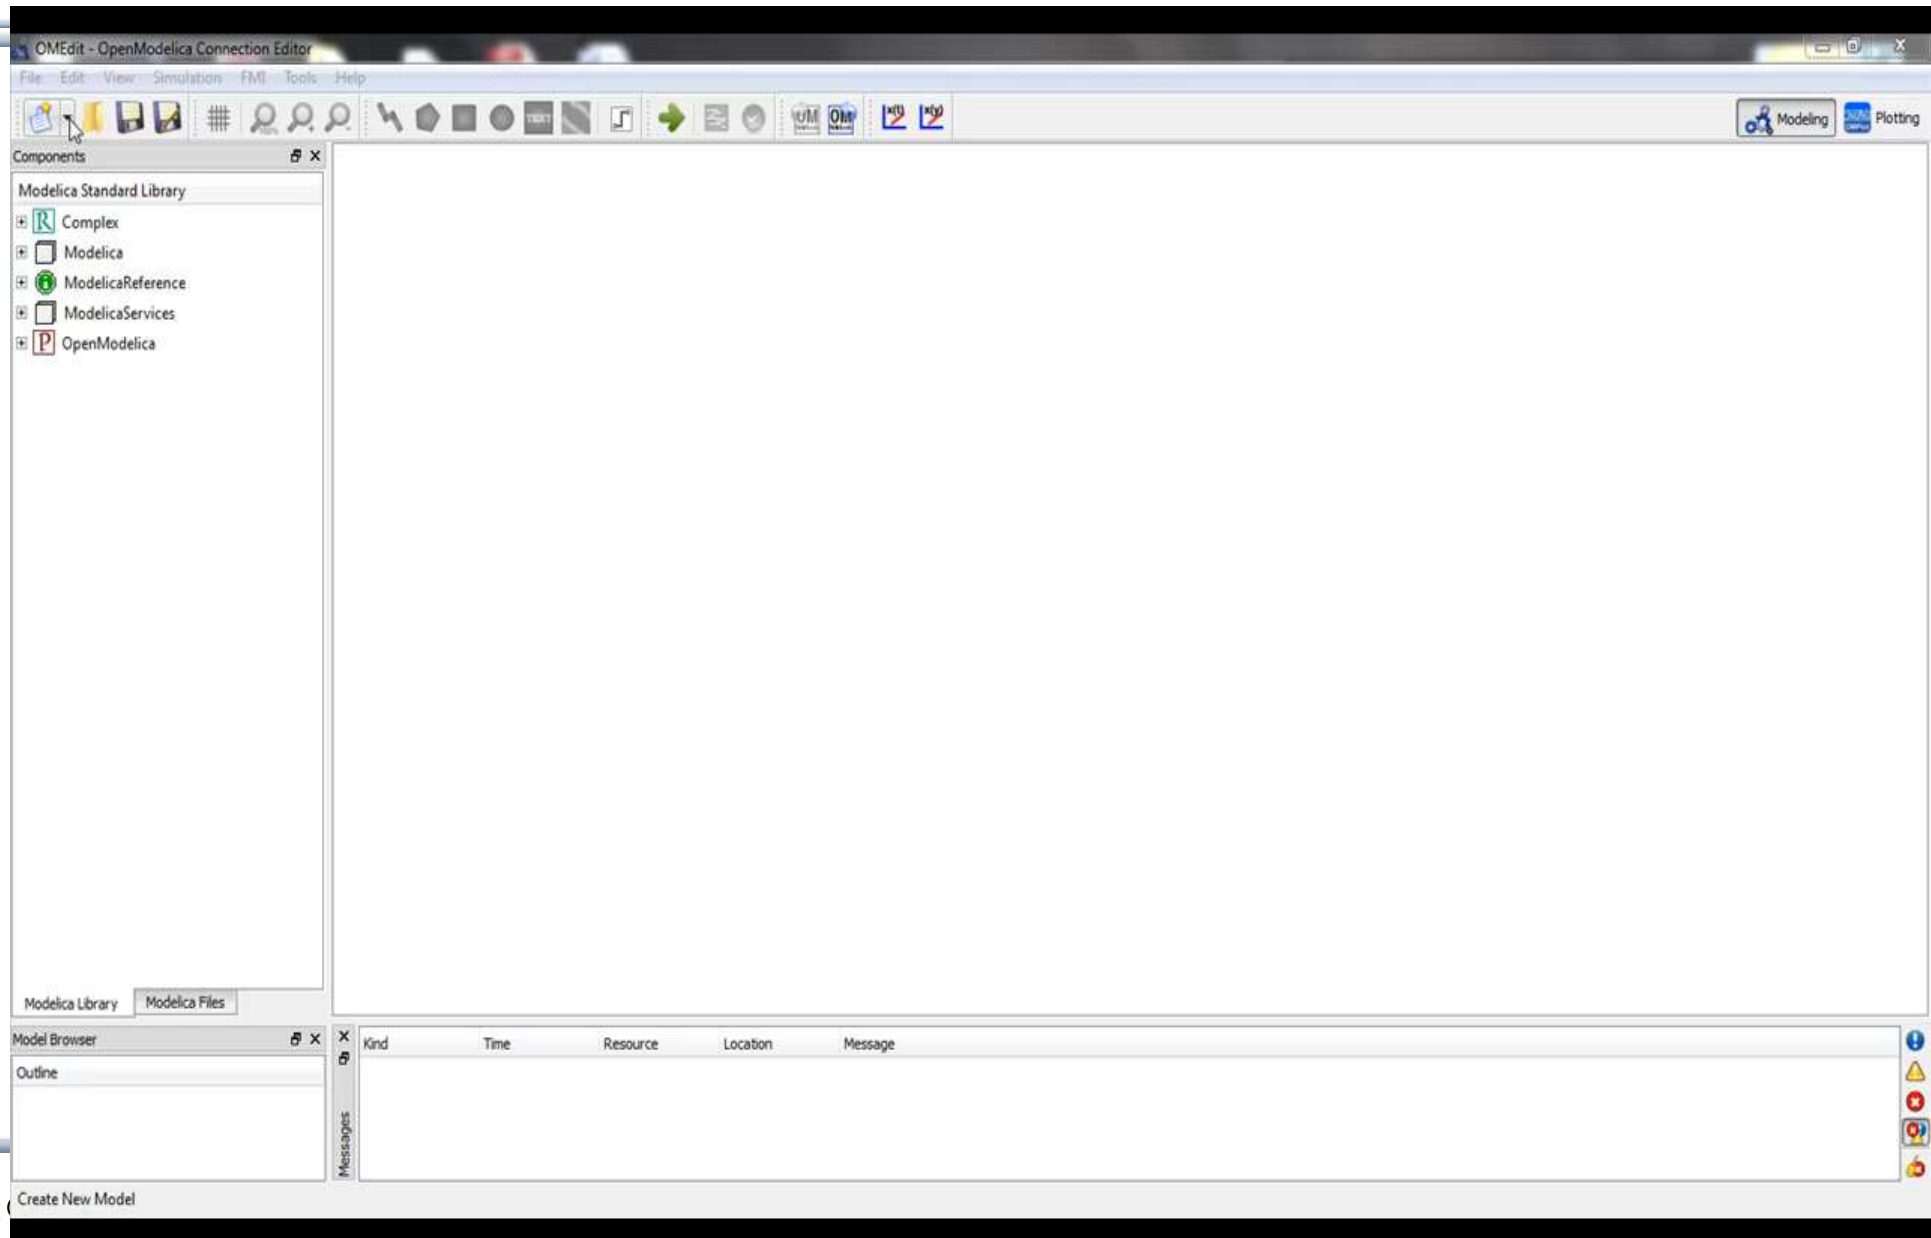

Multi-Domain (Electro-Mechanical) Modelica Model

- A DC motor can be thought of as an electrical circuit which also contains an electromechanical component

model DCMotor

```
Resistor R(R=100);
```

```
Inductor L(L=100);
```

```
VsourceDC DC(f=10);
```

```
Ground G;
```

```
ElectroMechanicalElement EM(k=10,J=10, b=2);
```

```
Inertia load;
```

equation

```
connect (DC.p,R.n);
```

```
connect (R.p,L.n);
```


```
connect (L.p, EM.n);
```

```
connect (EM.p, DC.n);
```

```
connect (DC.n,G.p);
```

```
connect (EM.flange,load.flange);
```

end DCMotor

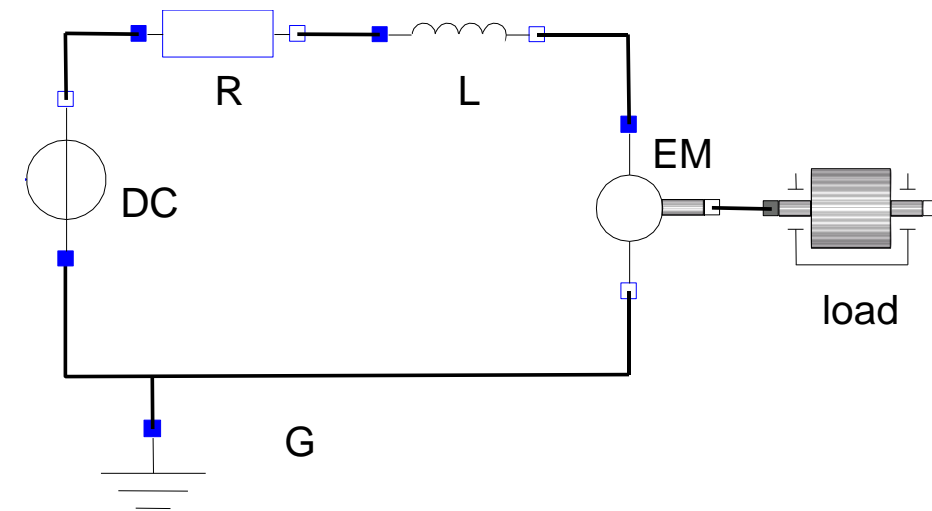

Corresponding DCMotor Model Equations

The following equations are automatically derived from the Modelica model:


$0 == DC.p.i + R.n.i$	$EM.u == EM.p.v - EM.n.v$	$R.u == R.p.v - R.n.v$
$DC.p.v == R.n.v$	$0 == EM.p.i + EM.n.i$	$0 == R.p.i + R.n.i$
	$EM.i == EM.p.i$	$R.i == R.p.i$
$0 == R.p.i + L.n.i$	$EM.u == EM.k * EM.\omega$	$R.u == R.R * R.i$
$R.p.v == L.n.v$	$EM.i == EM.M / EM.k$	
	$EM.J * EM.\omega == EM.M - EM.b * EM.\omega$	$L.u == L.p.v - L.n.v$
$0 == L.p.i + EM.n.i$		$0 == L.p.i + L.n.i$
$L.p.v == EM.n.v$	$DC.u == DC.p.v - DC.n.v$	$L.i == L.p.i$
	$0 == DC.p.i + DC.n.i$	$L.u == L.L * L.i'$
$0 == EM.p.i + DC.n.i$	$DC.i == DC.p.i$	
$EM.p.v == DC.n.v$	$DC.u == DC.Amp * Sin[2 \pi DC.f * t]$	
$0 == DC.n.i + G.p.i$		
$DC.n.v == G.p.v$		

(load component not included)

Automatic transformation to ODE or DAE for simulation:


$$\frac{dx}{dt} == f[x, u, t] \quad g\left[\frac{dx}{dt}, x, u, t\right] == 0$$

Model Translation Process to Hybrid DAE to Code

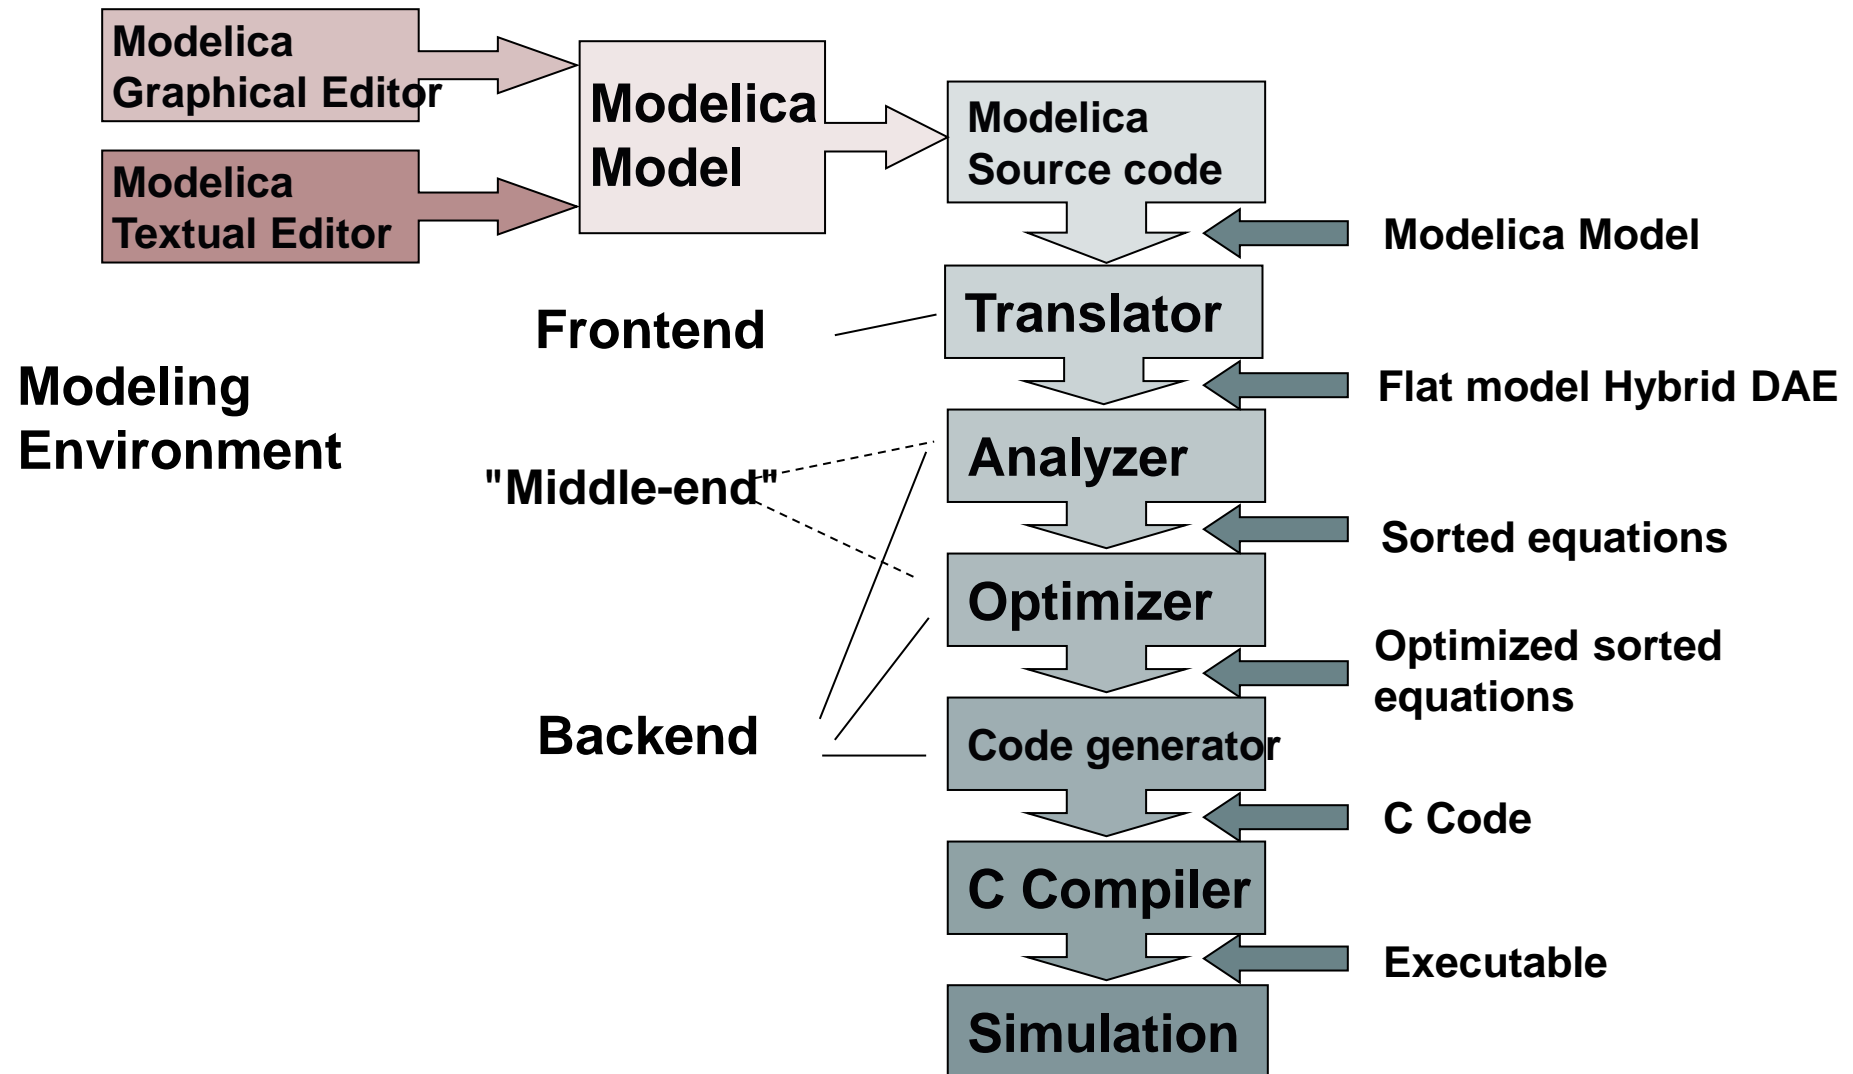

Modelica in Power Generation


GTX Gas Turbine Power Cutoff Mechanism

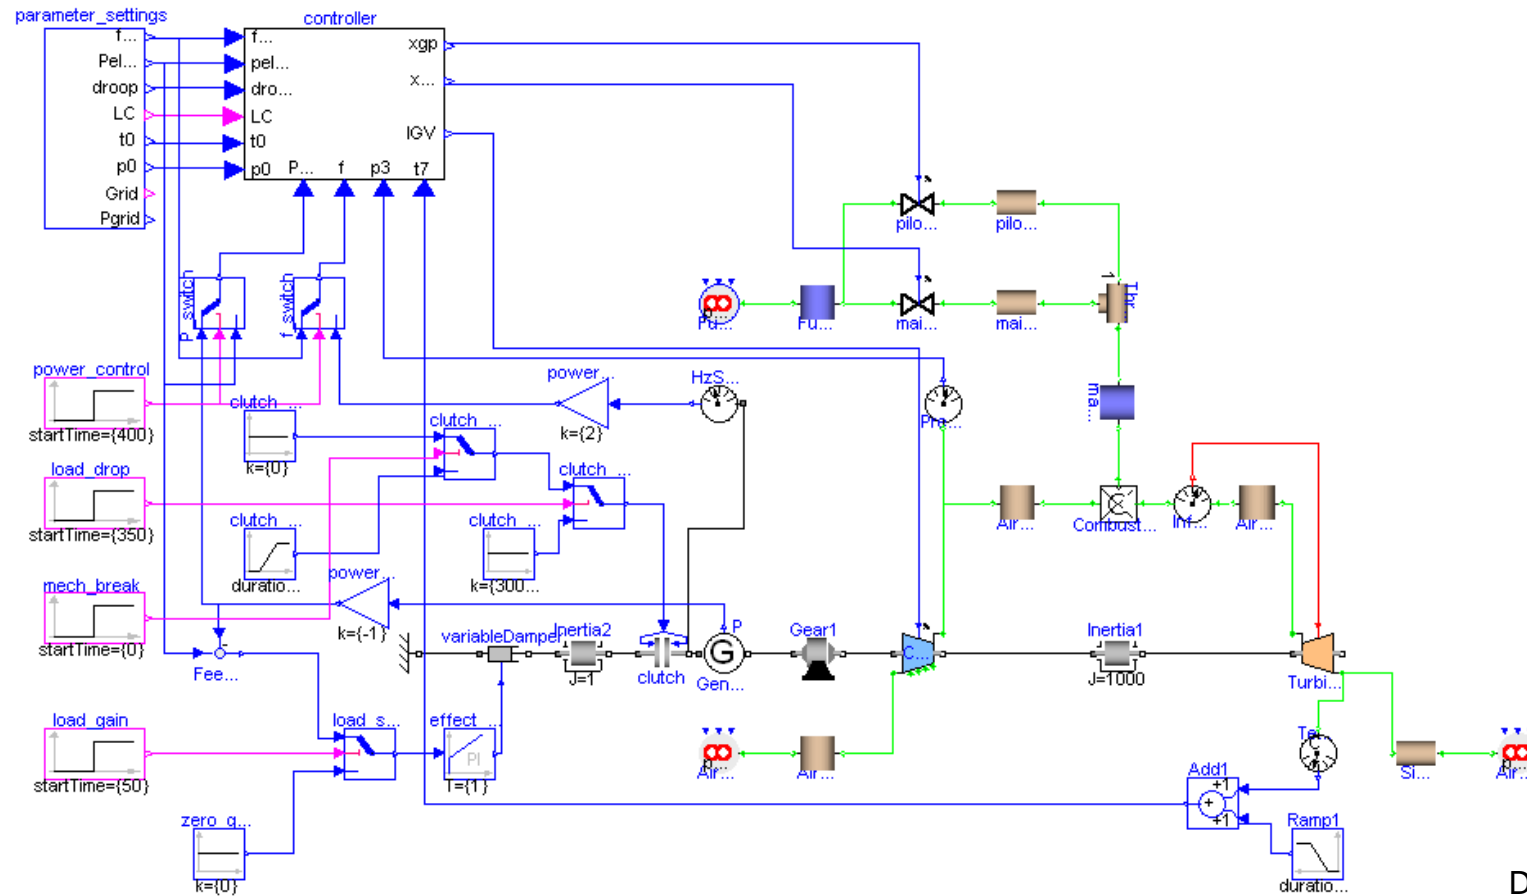


Developed
by MathCore
for Siemens

Courtesy of Siemens Industrial Turbomachinery AB



Modelica in Automotive Industry

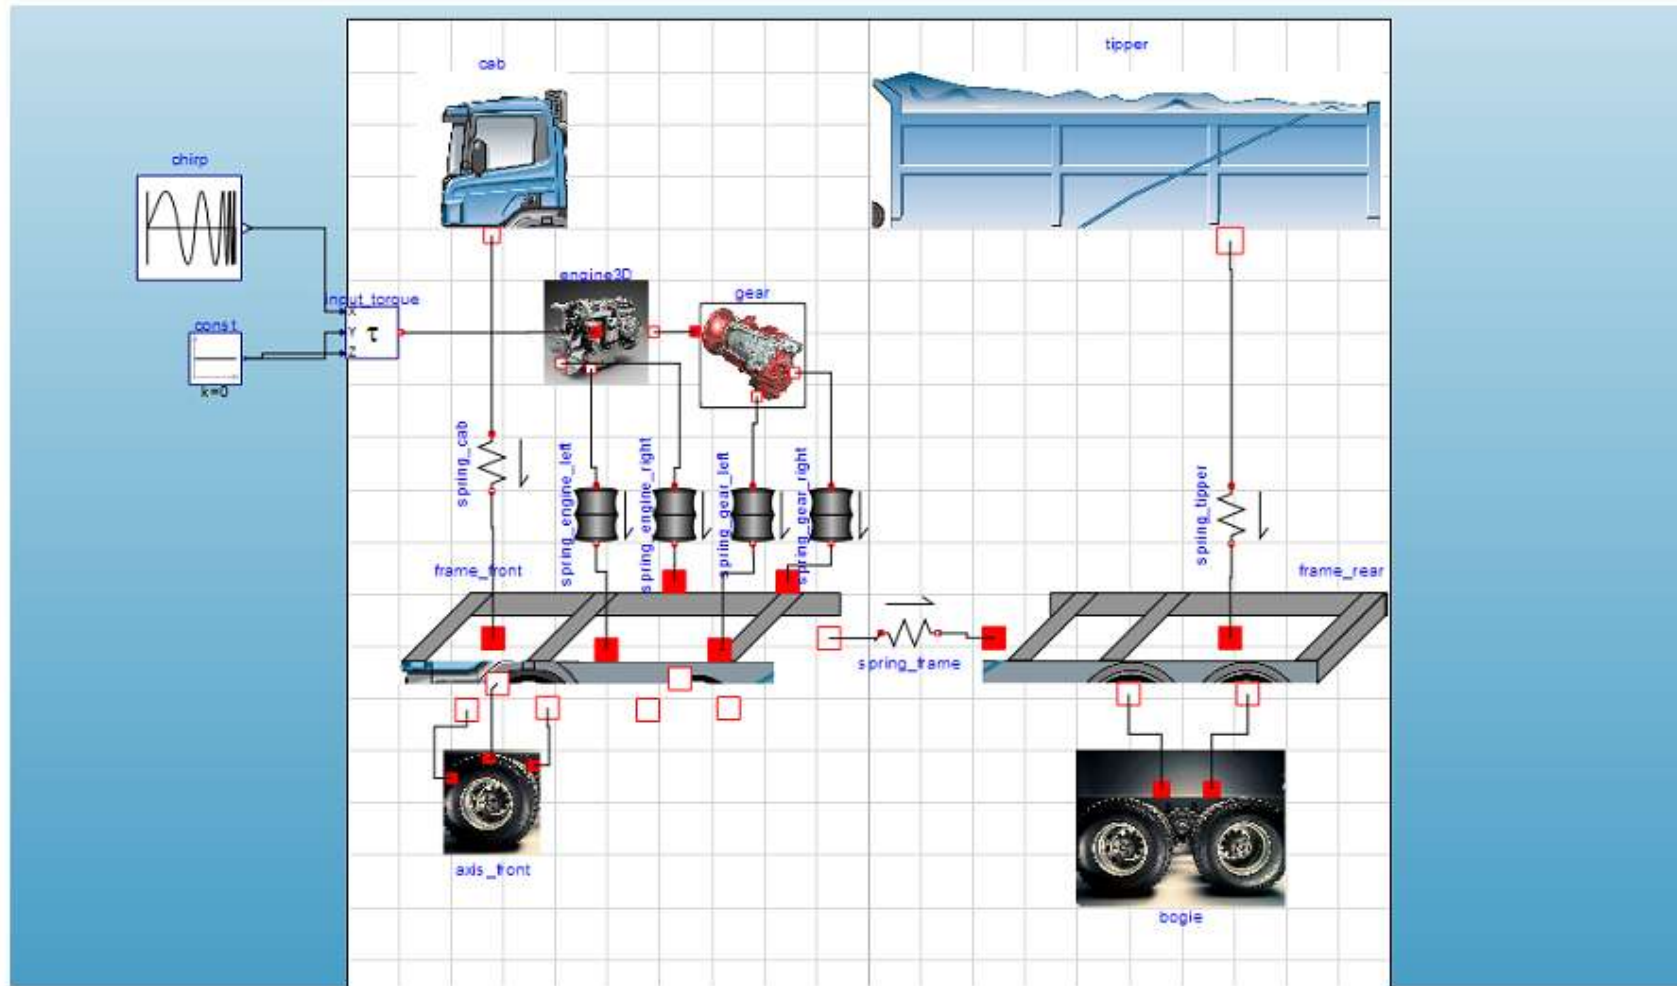

Modelica in Avionics

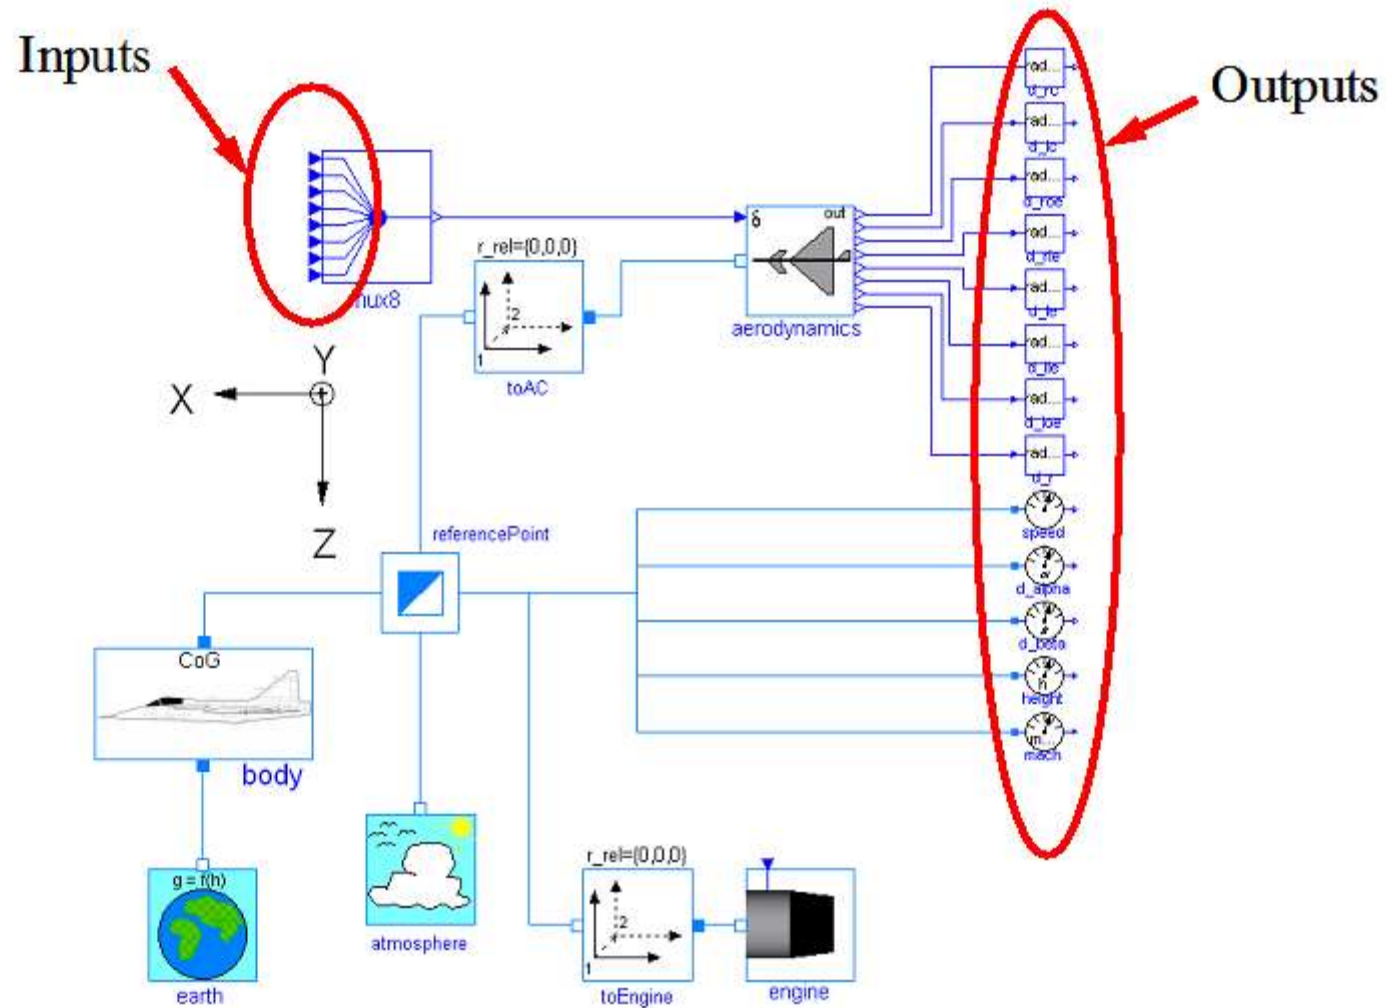

Modelica in Biomechanics

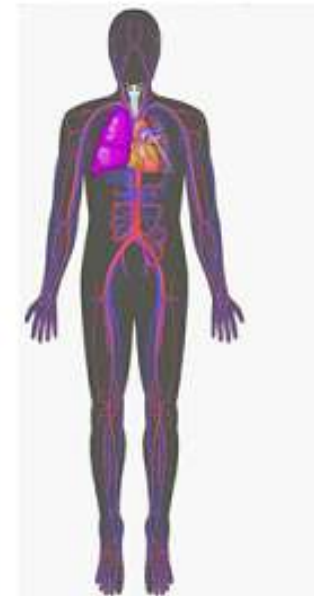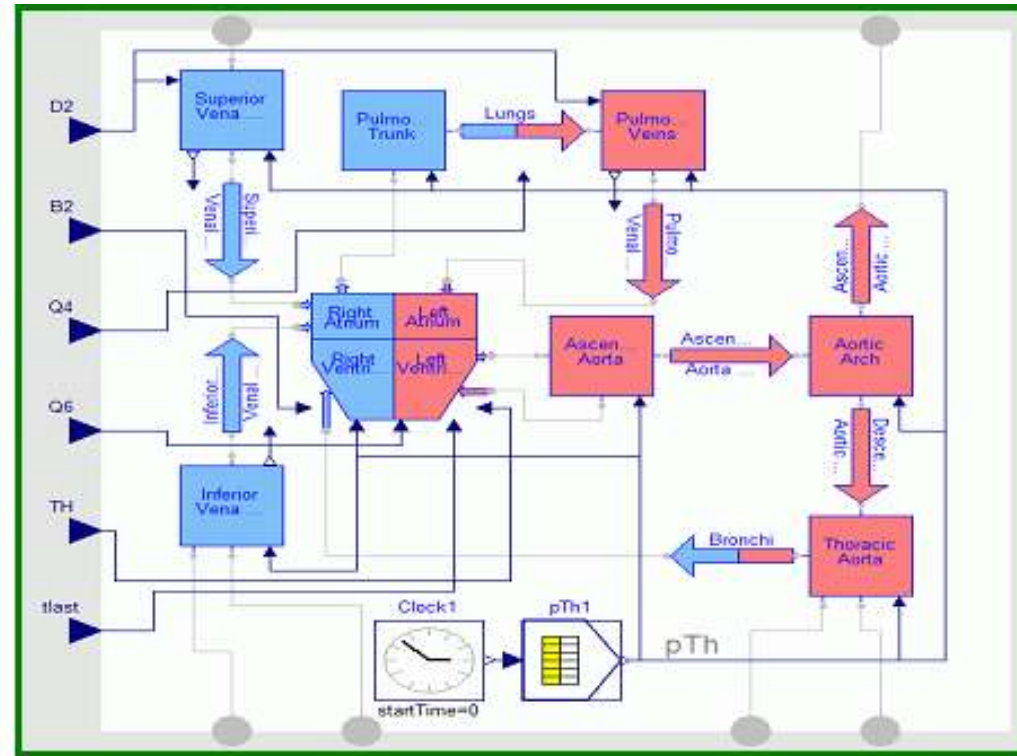

Application of Modelica in Robotics Models

Real-time Training Simulator for Flight, Driving

- Using Modelica models generating real-time code
- Different simulation environments (e.g. Flight, Car Driving, Helicopter)
- Developed at DLR Munich, Germany
- Dymola Modelica tool

(Movie demo next page)




Courtesy of Tobias Bellmann, DLR,
Oberpfaffenhofen, Germany

DLR Real-time Training Simulator Movie Demo




Combined-Cycle Power Plant Plant model – system level

- GT unit, ST unit, Drum boilers unit and HRSG units, connected by thermo-fluid ports and by signal buses
- Low-temperature parts (condenser, feedwater system, LP circuits) are represented by trivial boundary conditions.
- GT model: simple law relating the electrical load request with the exhaust gas temperature and flow rate.

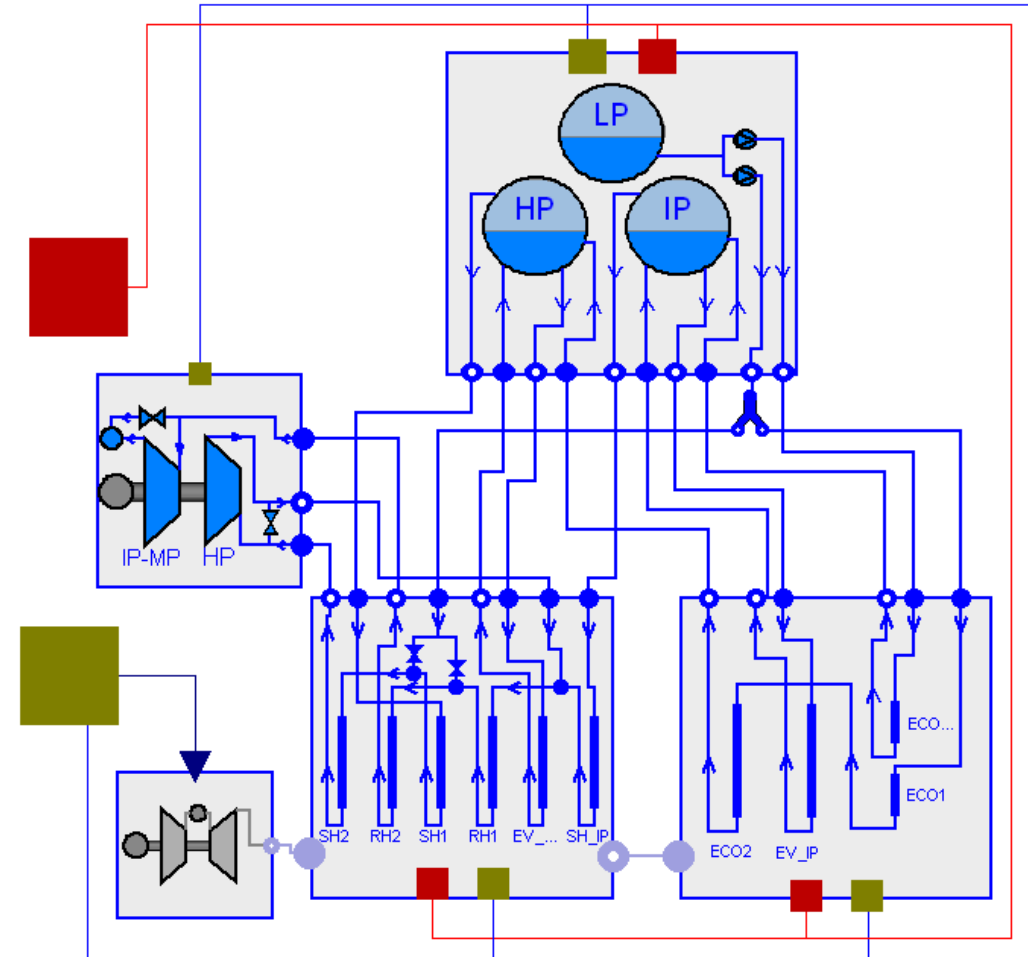



Courtesy Francesco Casella, Politecnico di Milano – Italy
and Francesco Pretolani, CESI SpA - Italy

Modelica Spacecraft Dynamics Library

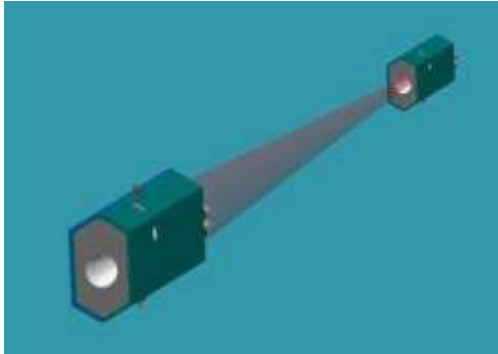

Formation flying on elliptical orbits

Control the relative motion of two or more spacecraft

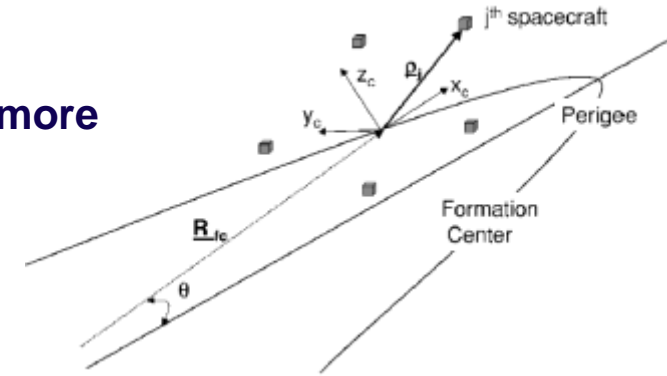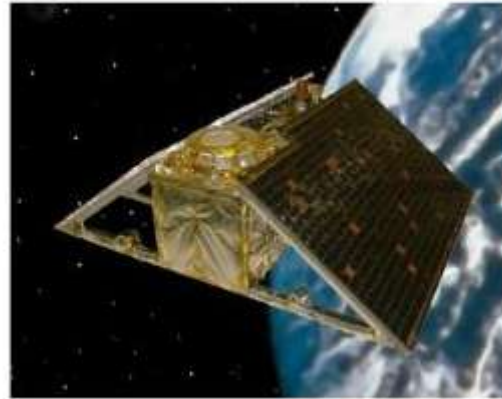

Attitude control for satellites using magnetic coils as actuators

Torque generation mechanism: interaction between coils and geomagnetic field

Courtesy of Francesco Casella, Politecnico di Milano, Italy



Large-scale ABB OpenModelica Application

Generate code for controlling 7.5 to 10% of German Power Production



ABB OPTIMAX PowerFit

- Real-time optimizing control of large-scale virtual power plant for system integration
- **Software including OpenModelica** now used in managing more than 2500 renewable plants, total up to 1.5 GW

High scalability supporting growth


- 2012: initial delivery (for 50 plants)
- 2013: SW extension (500 plants)
- 2014: HW+SW extension (> 2000)
- 2015: HW+SW extension, incl. OpenModelica generating optimizing controller code in FMI 2.0 form

Manage 7.5% - 10% of German Power

- Since 2015, Aug: OpenModelica Exports FMUs for real-time optimizing control (seconds) of about **5.000 MW (7.5%) of power in Germany**

Industrial Product with OEM Usage of OpenModelica – MIKE by DHI, WEST Water Quality, Water Treatment and Sludge



- **MIKE by DHI**, www.mikebydhi.com, **WEST Water Quality** modeling and simulation environment
- Includes a large part of the OpenModelica compiler using the OEM license.
- Here a water treatment effluent and sludge simulation.

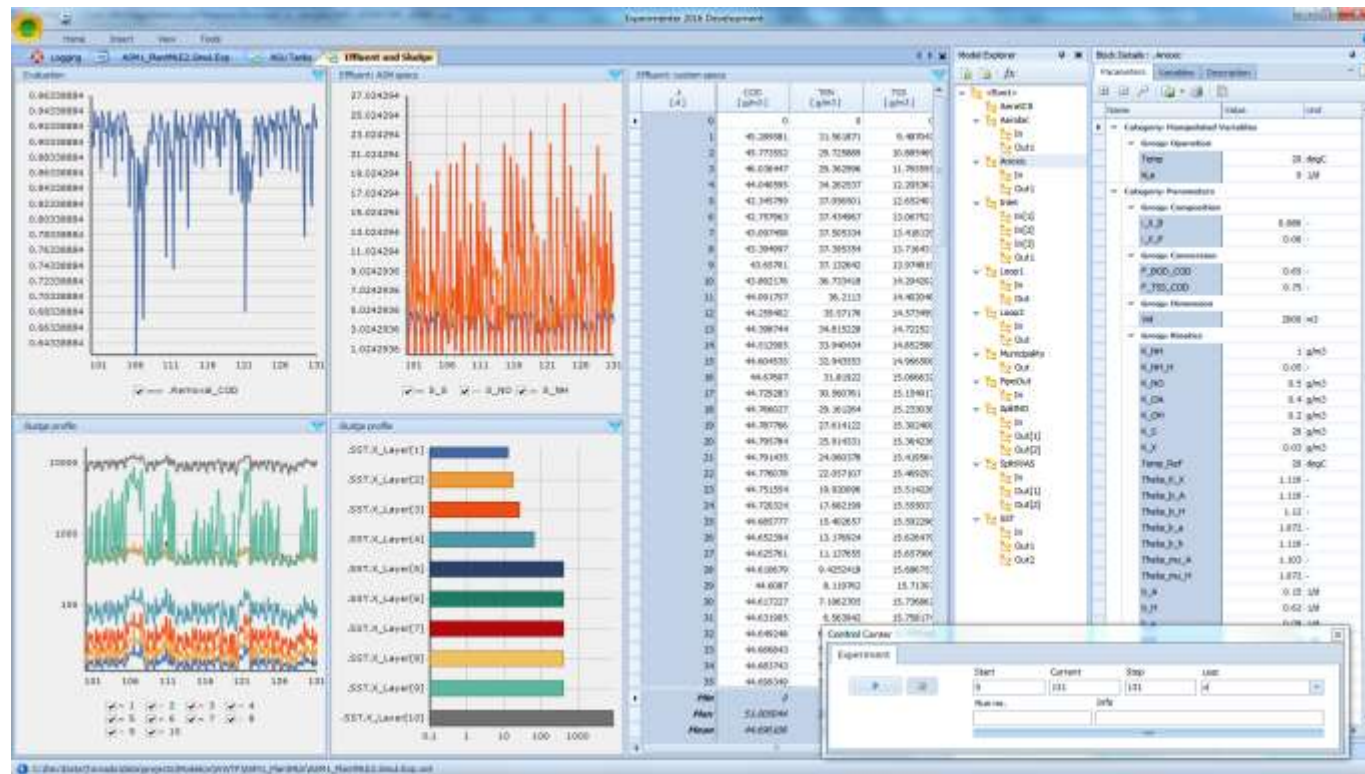

**Most important challenge
for humanity -
Develop a sustainable society!**

**Use Modelica in to model and optimize
sustainable technical innovations,
and a sustainable circular economy**

Carbon dioxide in the atmosphere and earth temperature

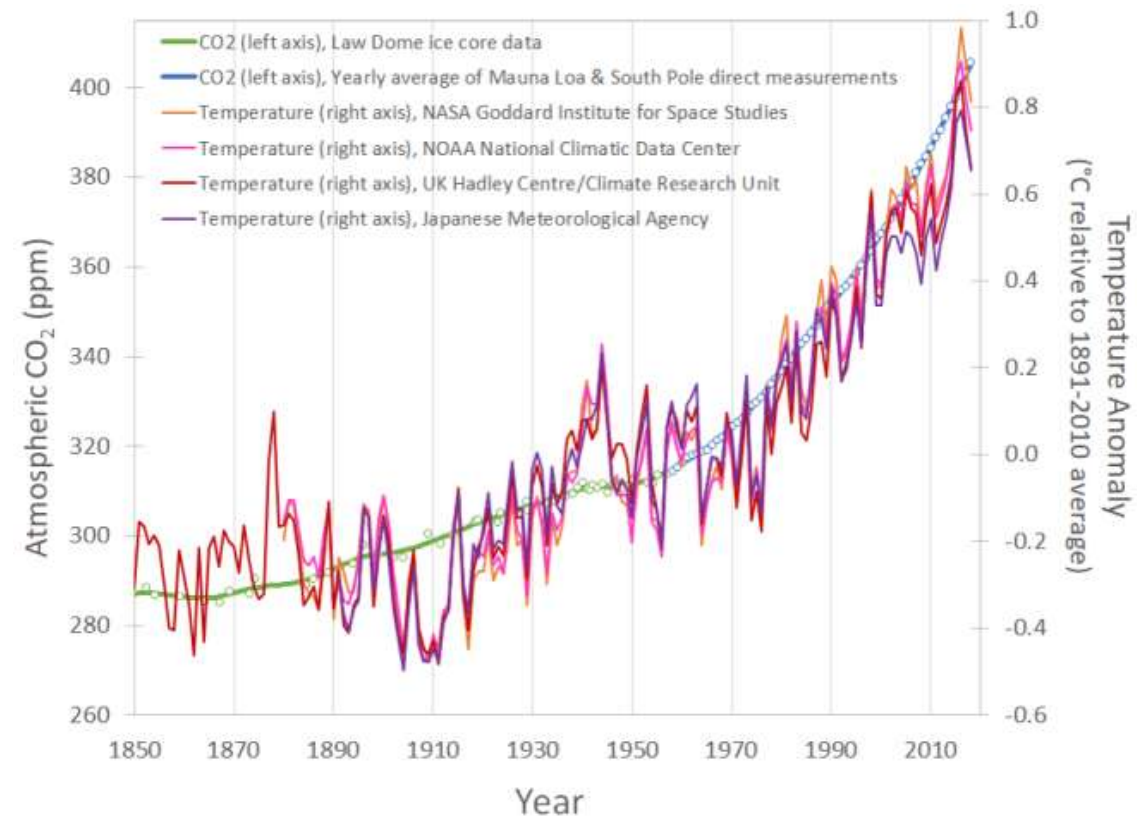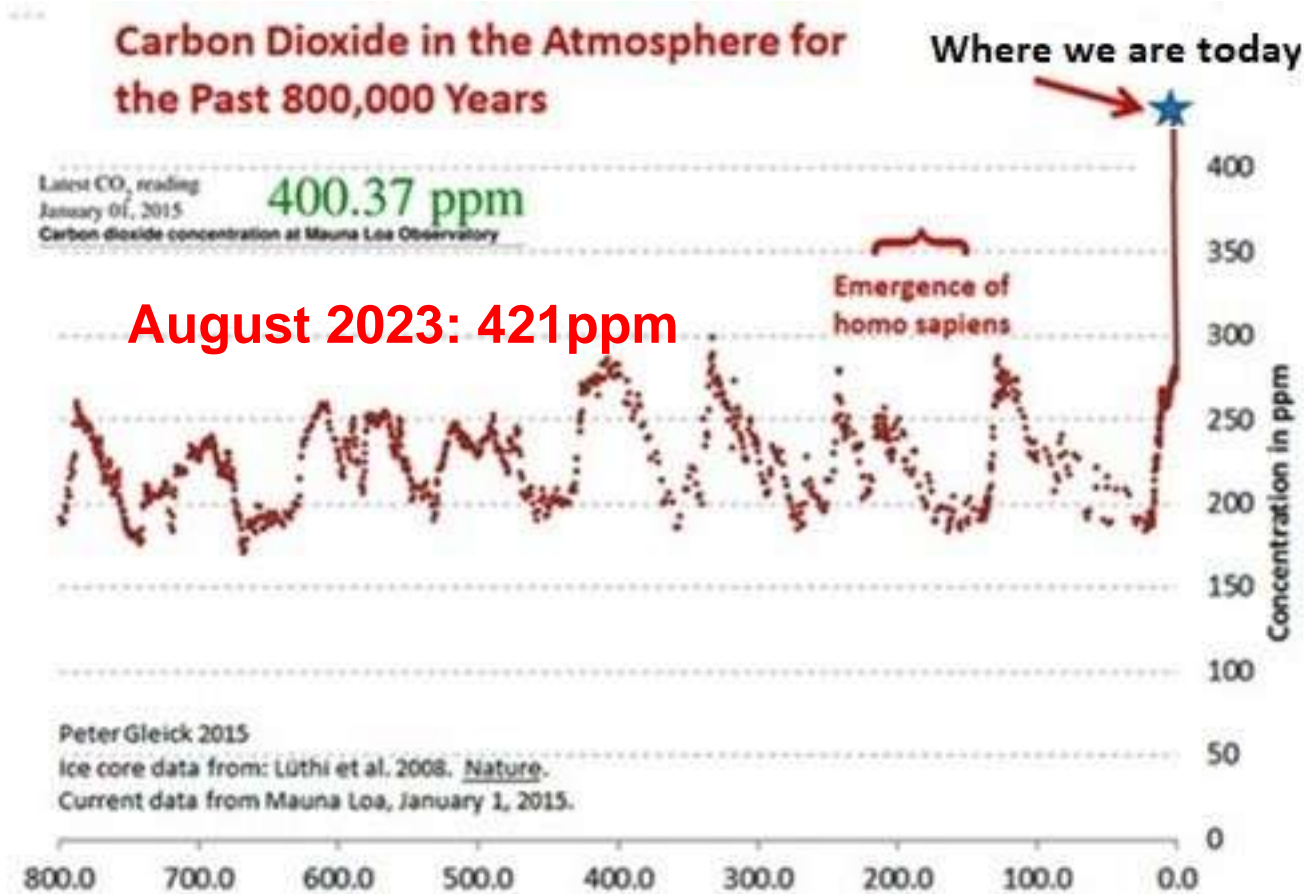


There is no doubt that man is affecting the climate

Carbon dioxide in the atmosphere and earth temperature

Daily Surface Air Temperature, World (90°S–90°N, 0–360°E)



Dataset: NCEP Climate Forecast System | Image Credit: ClimateReanalyzer.org, Climate Change Institute, University of Maine

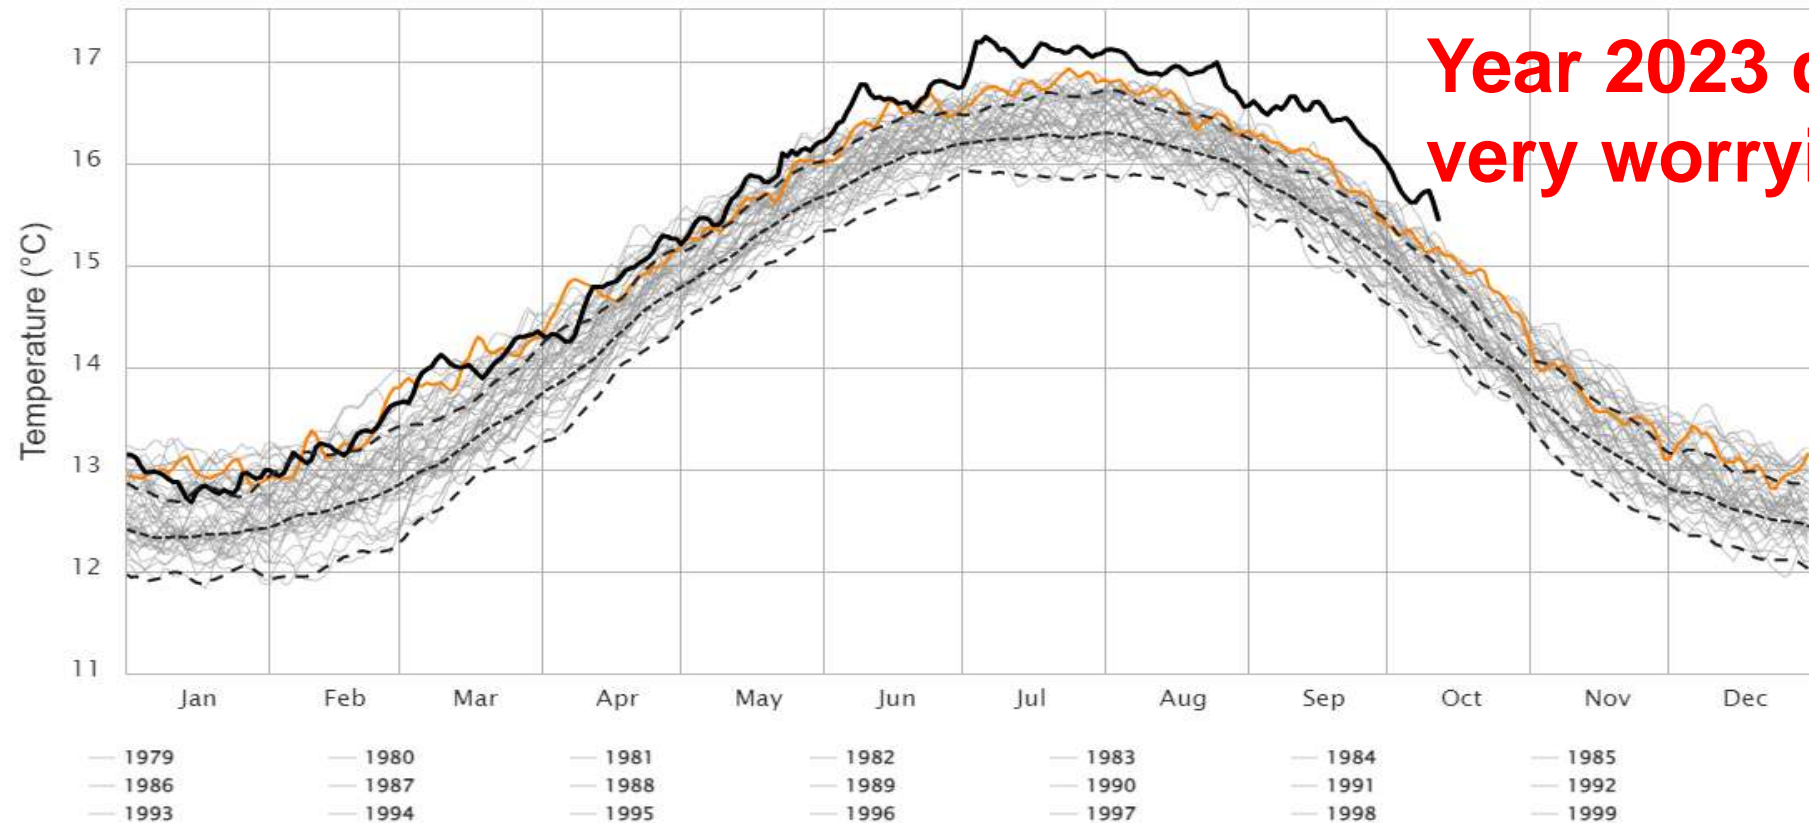

September 2023 shows 1.75 °C higher temperature than preindustrial.
climate.copernicus.eu

World3 Simulations with Different Start Years for Sustainable Policies

– World Society Collapse if starting too late

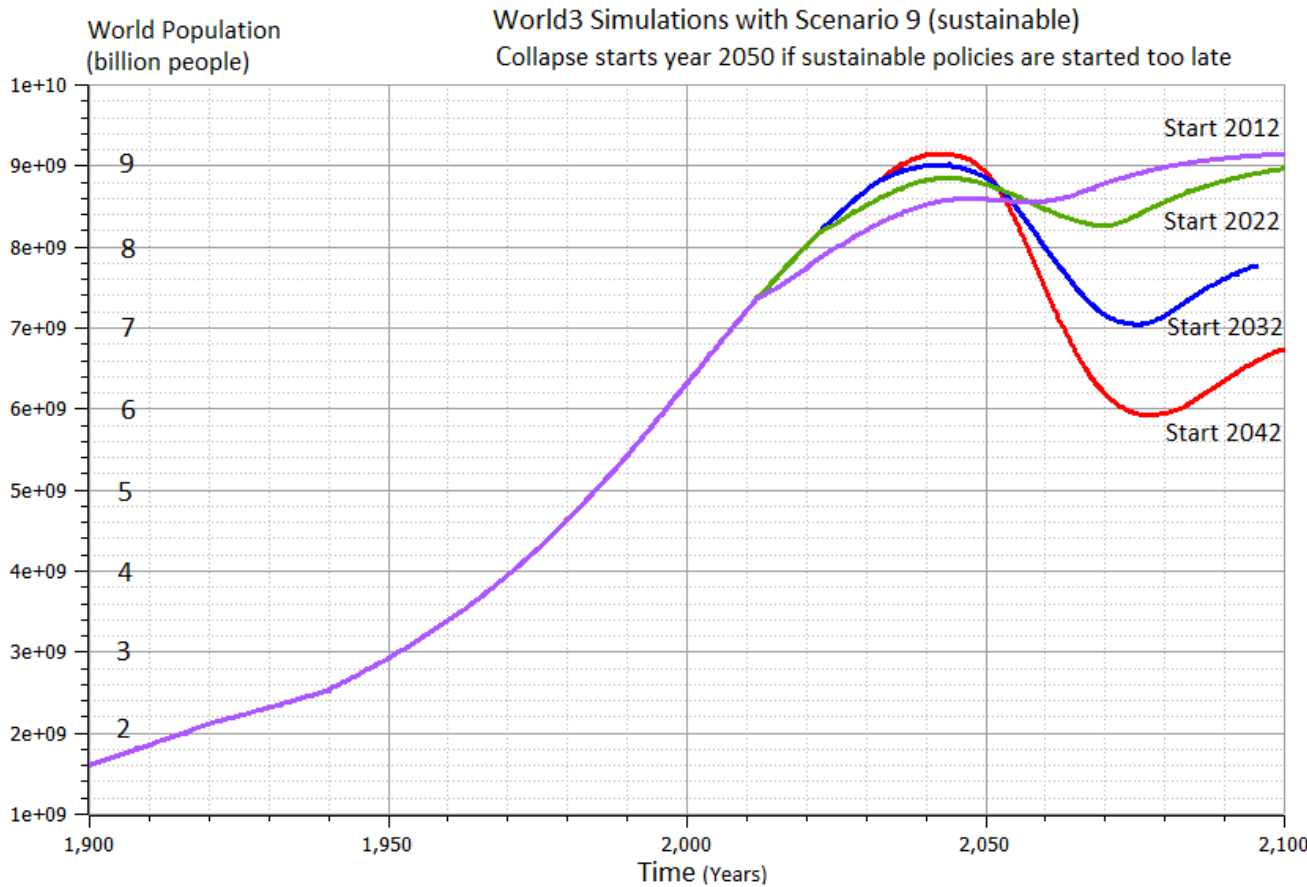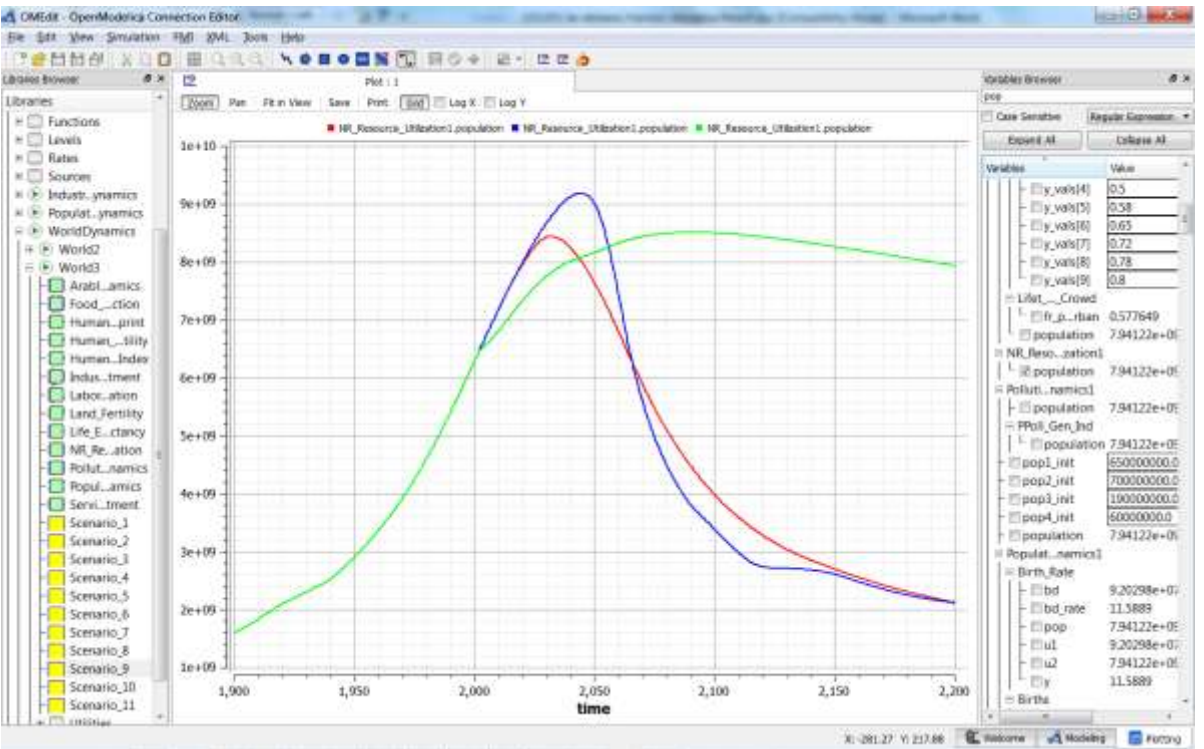

Left. System Dynamics World3 simulation with OpenModelica. World population. (ref Meadows et al)


- 2 collapse scenarios (close to current developments)
- 1 sustainable scenario (green).

- Warming converts many agriculture areas to deserts (USA, Europe, India, Amazonas)
- Ecological breakdown around 2080-2100, drastic reduction of world population
- To **avoid** this: Need for massive investments in sustainable technology and renewable energy sources

Are Humans More Intelligent than Bacteria?

Not yet evident!


Humans on a finite Earth
vs
Bacteria on a finite substrate

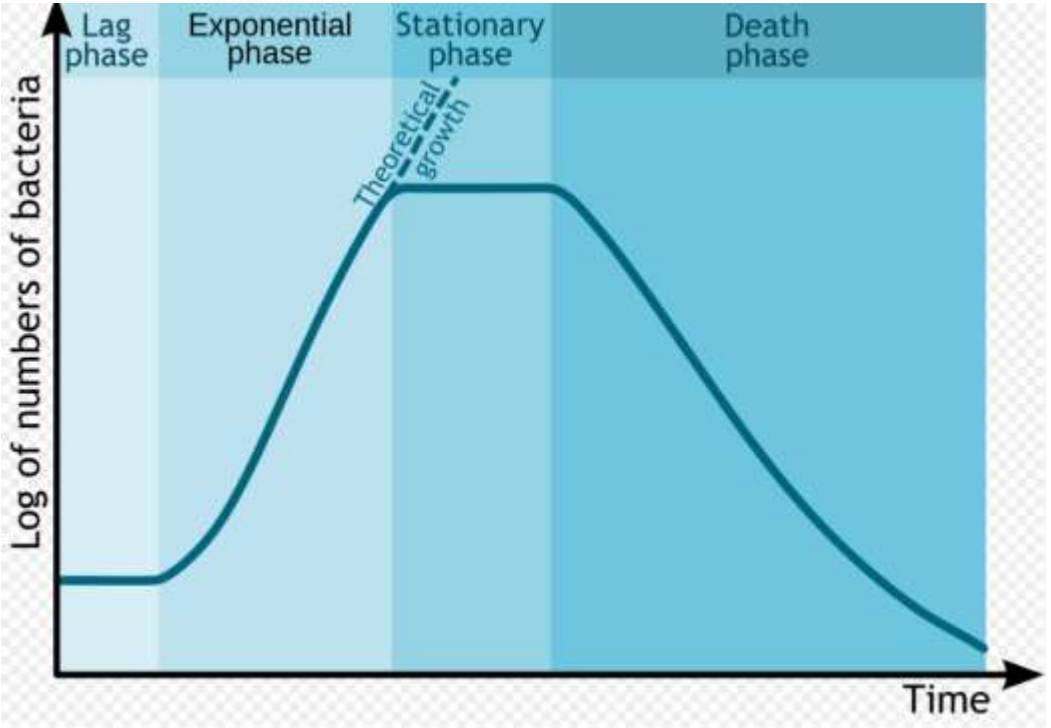


Bacterial growth curve /kinetic curve (Wikipedia)

ProductionGap.org

Coal

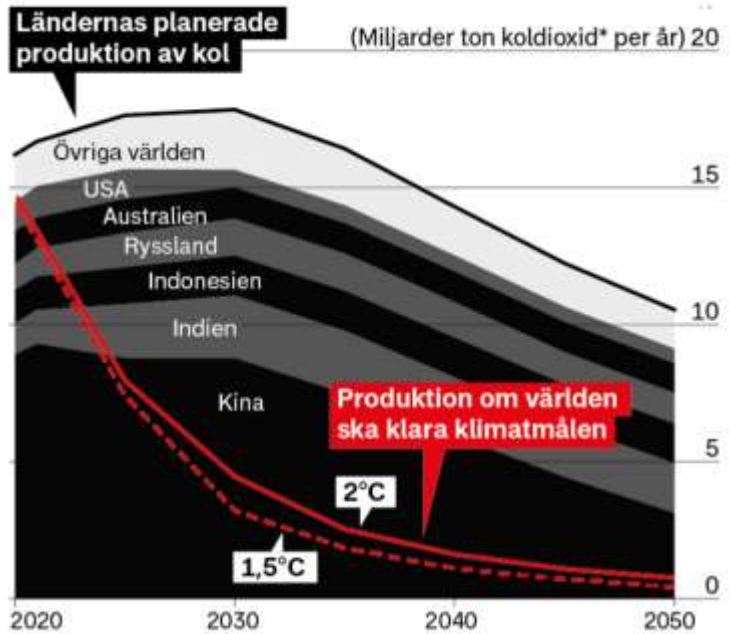

Oil

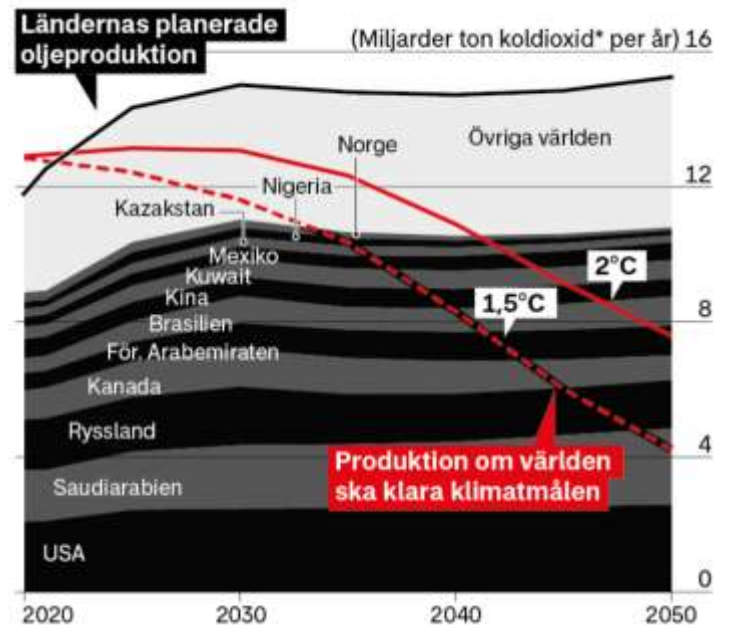

LIMITS TO GROWTH



The 30-Year Update

DONELLA MEADOWS | JORGEN RANDERS | DENNIS MEADOWS

THE NEW YORK TIMES BESTSELLER

COLLAPSE

HOW SOCIETIES CHOOSE
TO FAIL OR SUCCEED

JARED DIAMOND

author of the Pulitzer Prize-winning

GUNS, GERMS, and STEEL


WITH A NEW AFTERWORD



MODELICA

How the world could be in 80-100 years at a global warming of 4 degrees

Business-as-usual scenario, IPCC, 2009

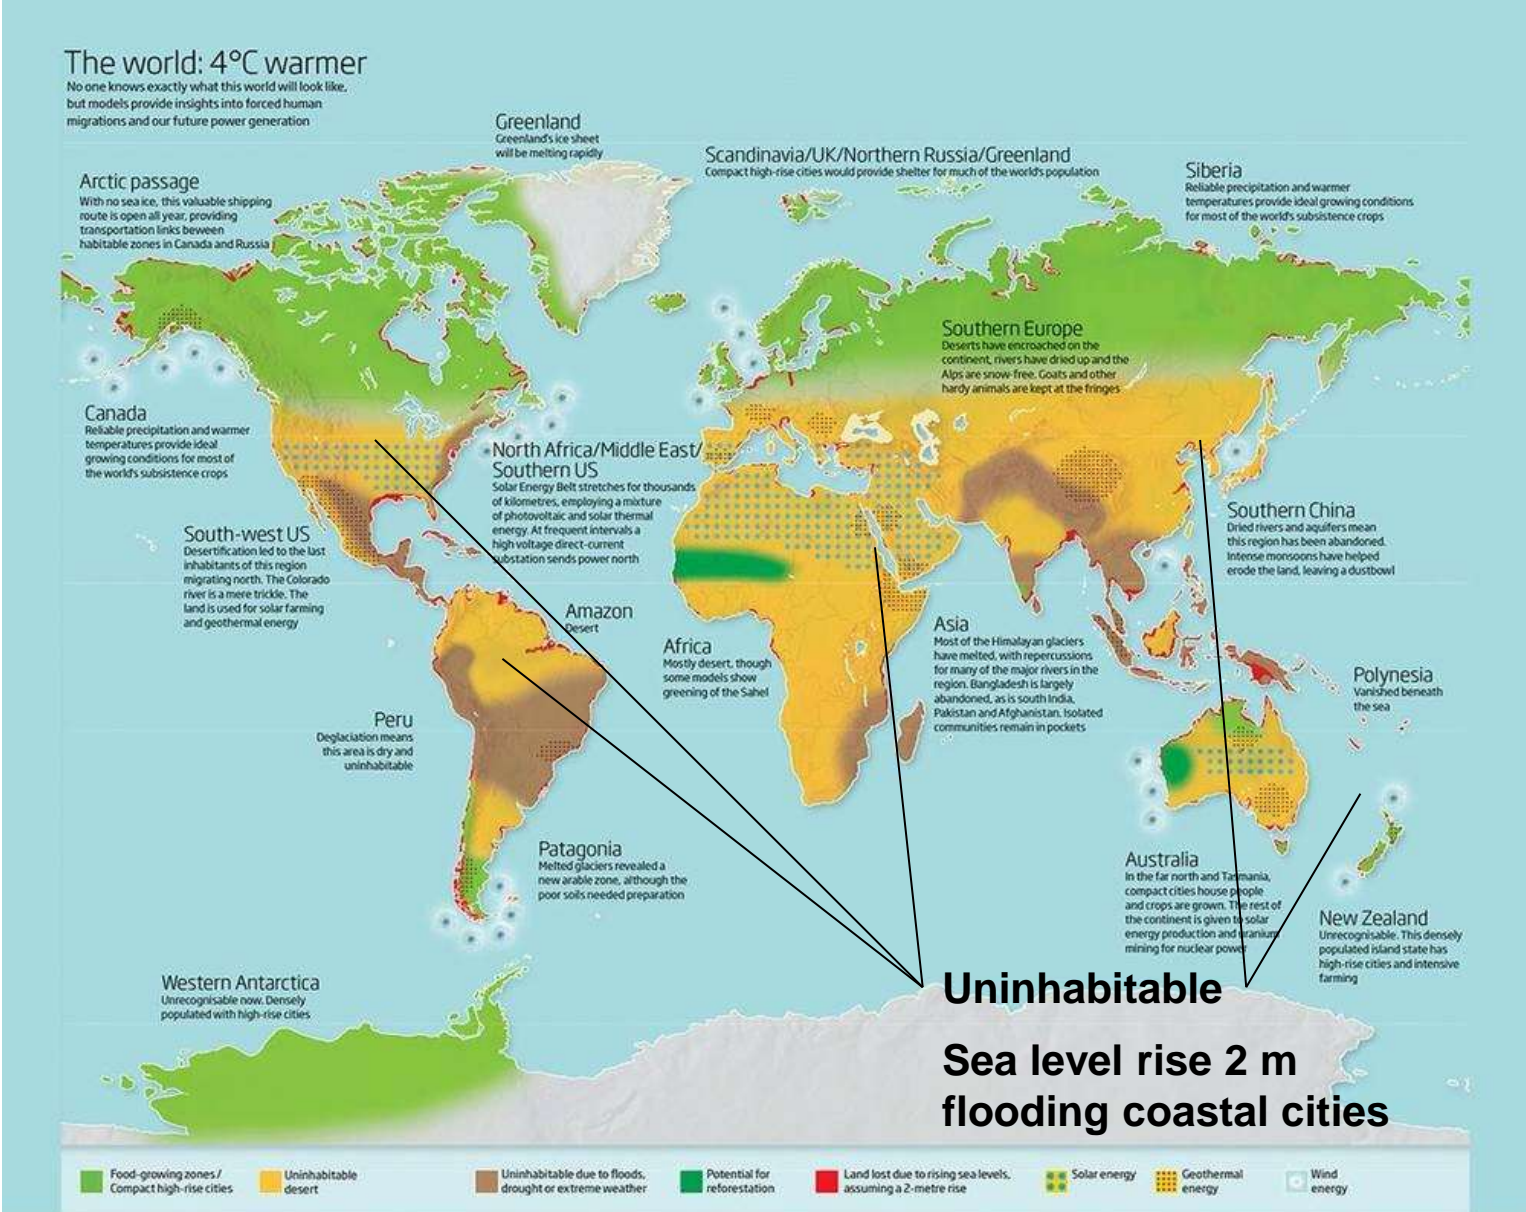

- Cities, agriculture
- Uninhabitable desert
- Uninhabitable due to extreme weather
- Flooded

Massive migration to northern Europe, Russia, and Canada

- Example Emissions**
CO2e / person
- Earth can handle 2 ton/yr
 - Flight Spain – 1 ton
 - Flight Canaryis – 2 ton
 - Flight Thailand – 4 ton

References
 New Scientist, 28 February 2009
 IPCC, business as usual scenario
www.climate-lab-book.ac.uk
www.atmosfair.de


What Can You Do?

Need Global Sustainability Mass Movement

- Develop smart Cyber-Physical systems for reduced energy and material footprint
- Model-based circular economy for re-use of products and materials
- Promote sustainable lifestyle and technology
- Install electric solar PV panels
- Buy shares in cooperative wind power



20 sqm solar panels on garage roof, Nov 2012
Generated 2700 W at noon March 10, 2013

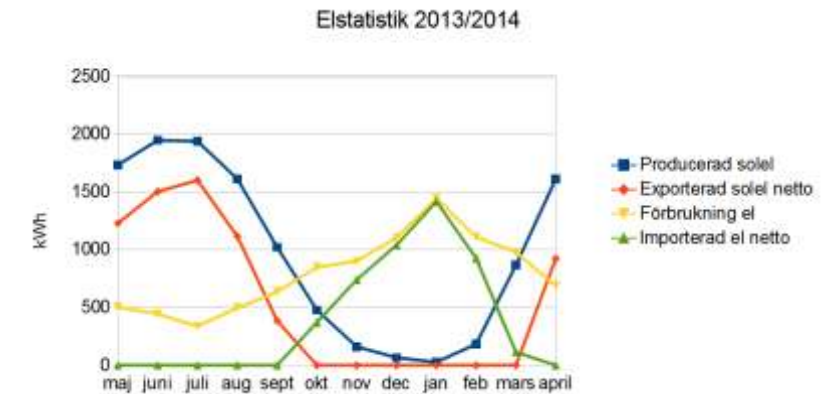


Expanded to 93 sqm, 12 kW, March 2013
House produced 11600 kWh, used 9500 kWh
Avoids 10 ton CO₂ emission per year

Example Electric Cars

Can be charged by electricity from own solar panels

Share of new electric cars: world, China, Norway 2010-2022

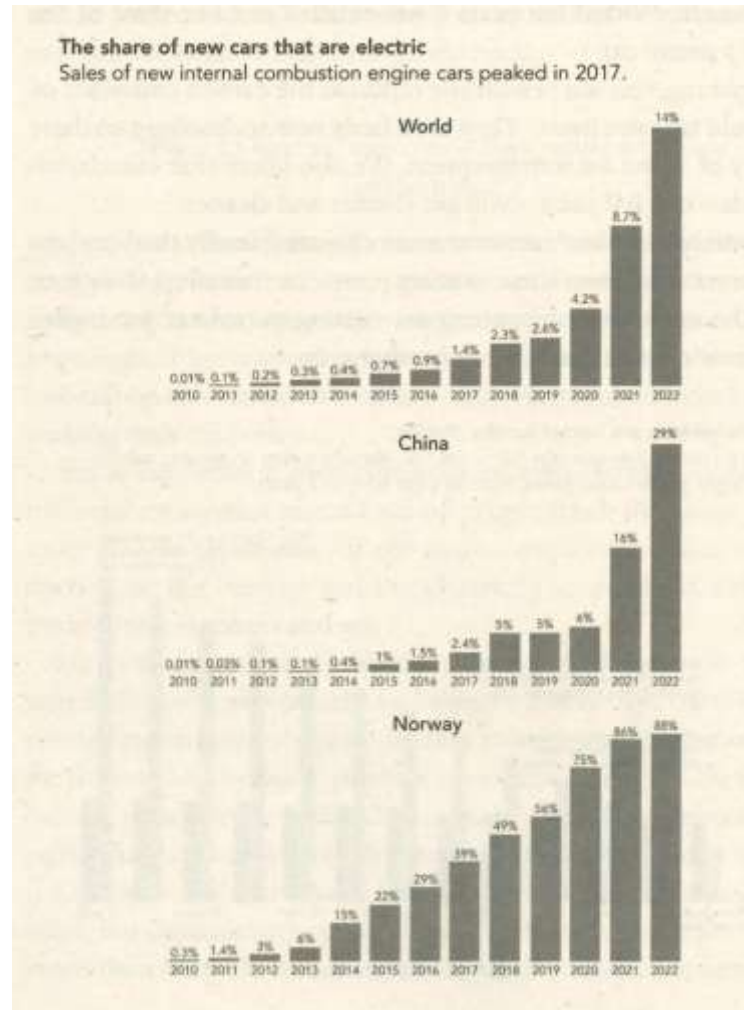

Small electric car Renault ZOE;
5 seat; Range:

- Realistic Swedish drive cycle:
- Summer: 2019 385 km
- Winter: 2019 290 km



2019, Tesla Model 3 LR, range 560 km



2020, Volvo XC40 recharge, range 400 km


What Can You Do?

More Train or Bus Travel – Less Air Travel

- Air travel by Swedish Citizens – about the same emissions as all personal car traffic in Sweden, about 10 Mtons/year!
- By train from Linköping to Munich and back – saves almost 1 ton of CO₂e emissions compared to flight
- Leave Linköping 07.00 in Munich 23.14

More Examples, PF travel:


- Train Linköping-Paris, Dec 3-6, 2016, EU project meeting
- Train Linköping-Aachen, Oct 8-12, 2023 Modelica konferens

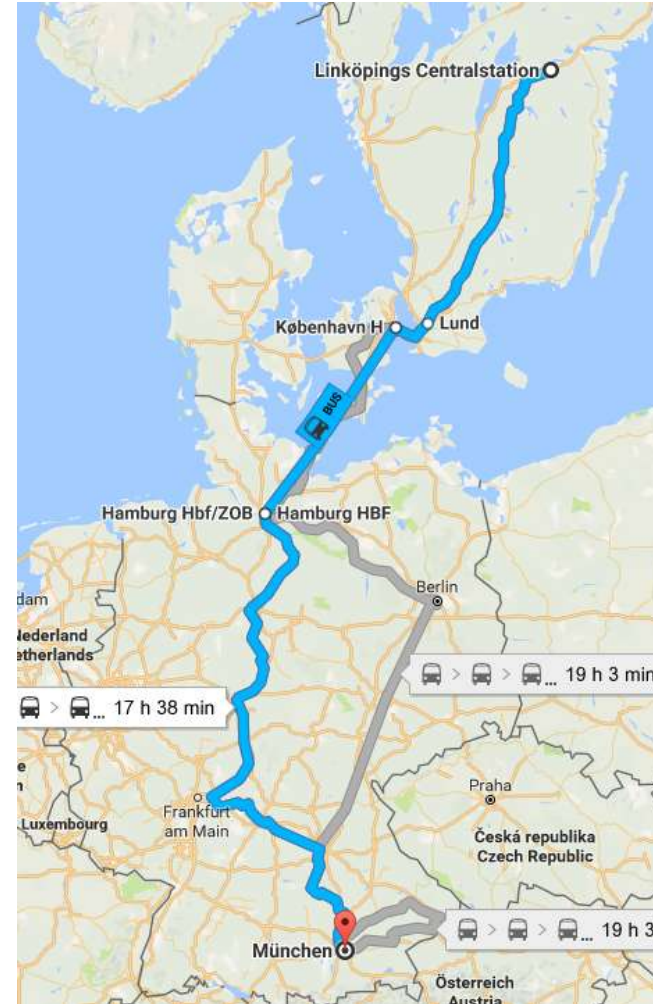

Train travel
Linköping -
Munich

Bus trip 2024
Sweden –
Italy
4000 km, **56
kg** emissions

Compare:
Flight to Italy
almost
1 ton
emissions

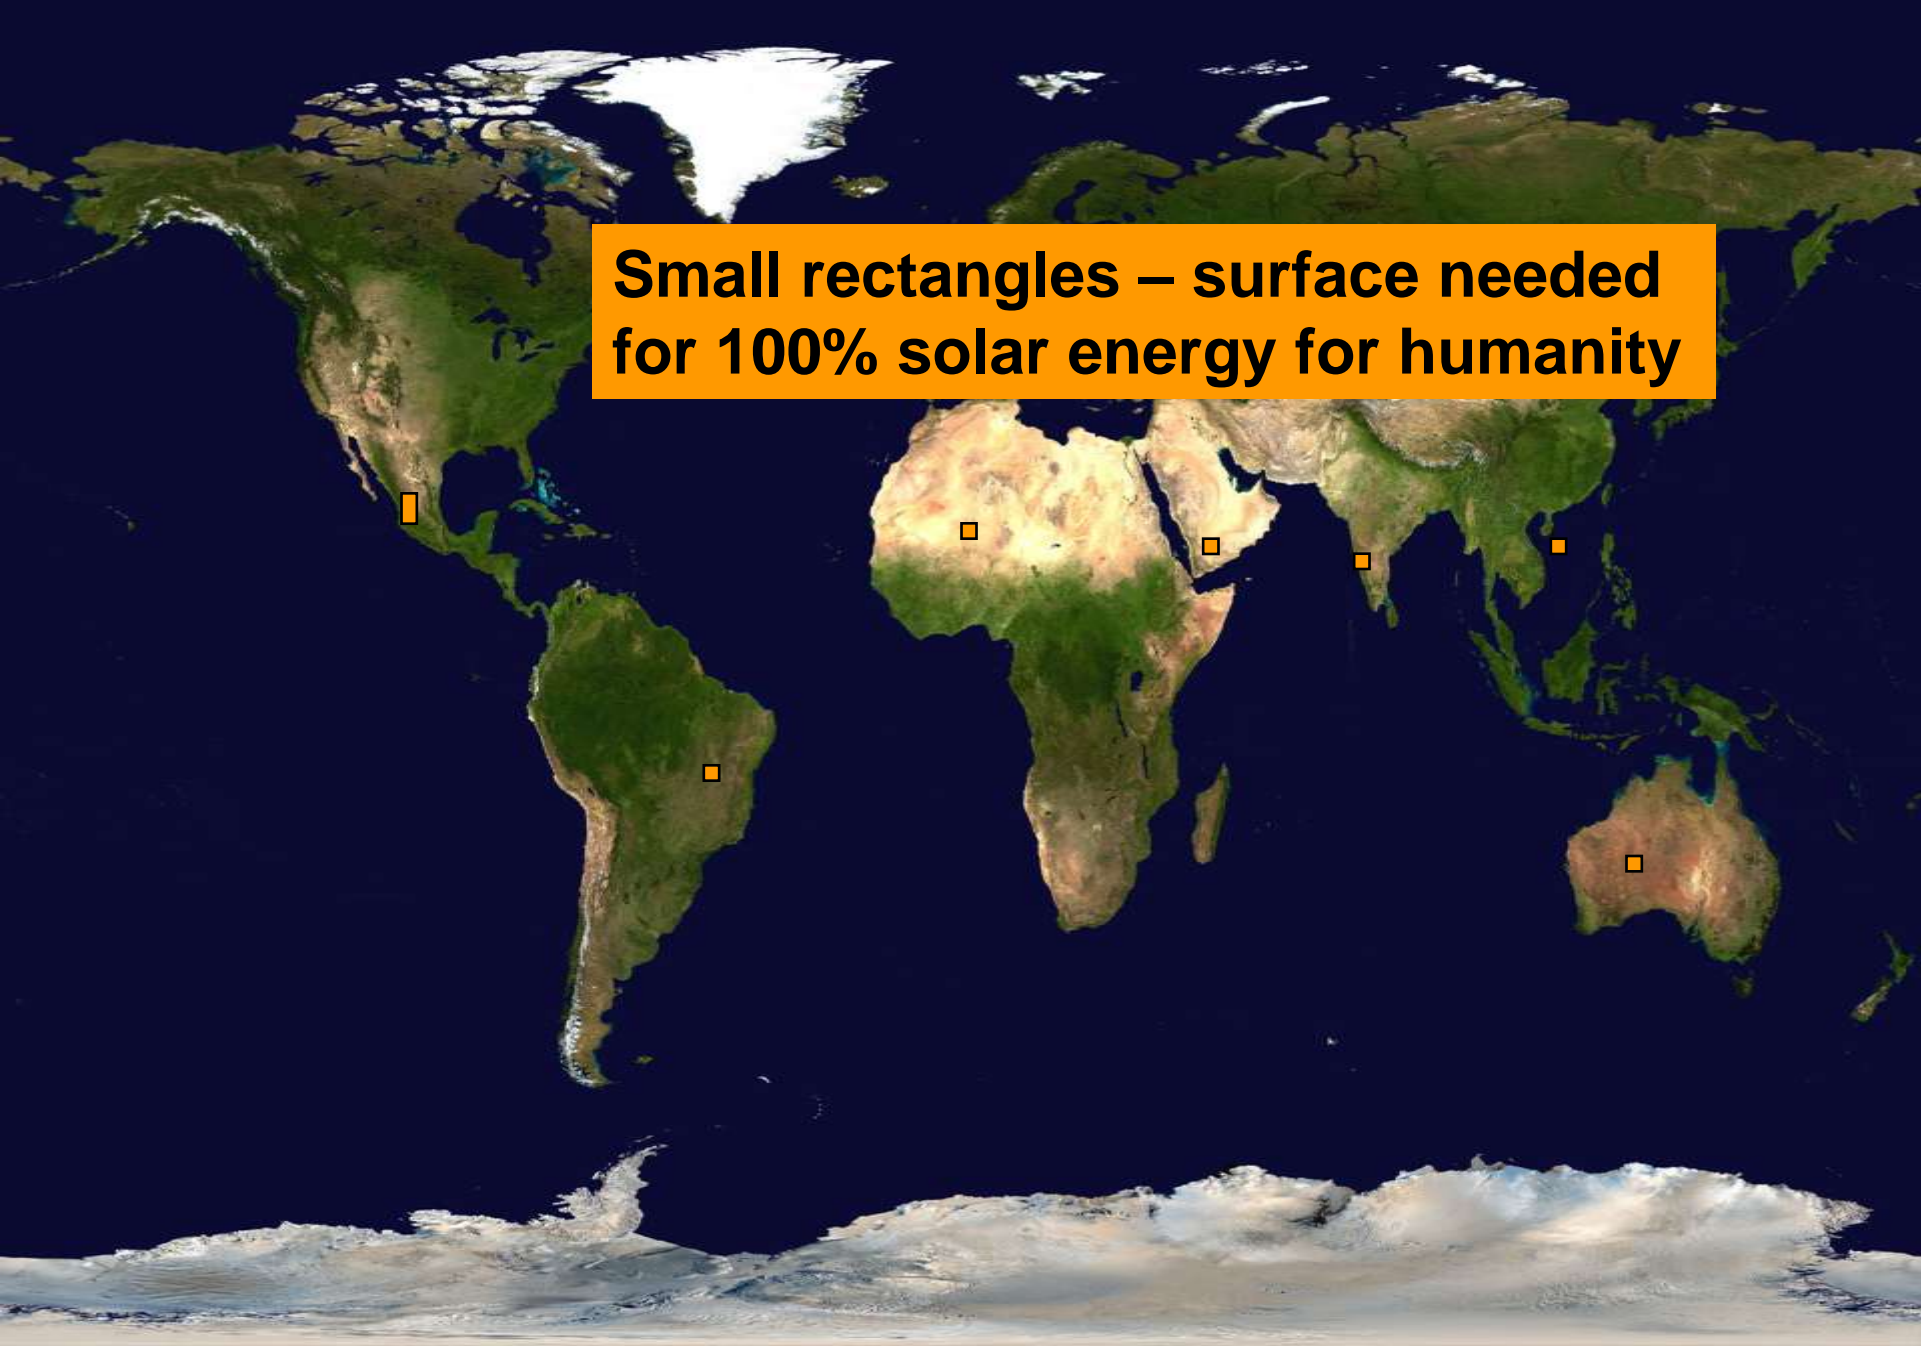


Small rectangles – surface needed for 100% solar energy for humanity

Solar Energy (electricity) will increase 4 times to 2030 biggest electricity producer 2033, coal,oil,gas decrease

Solar generation is set to quadruple by 2030, sending coal power tumbling

Global electricity generation by source, TWh

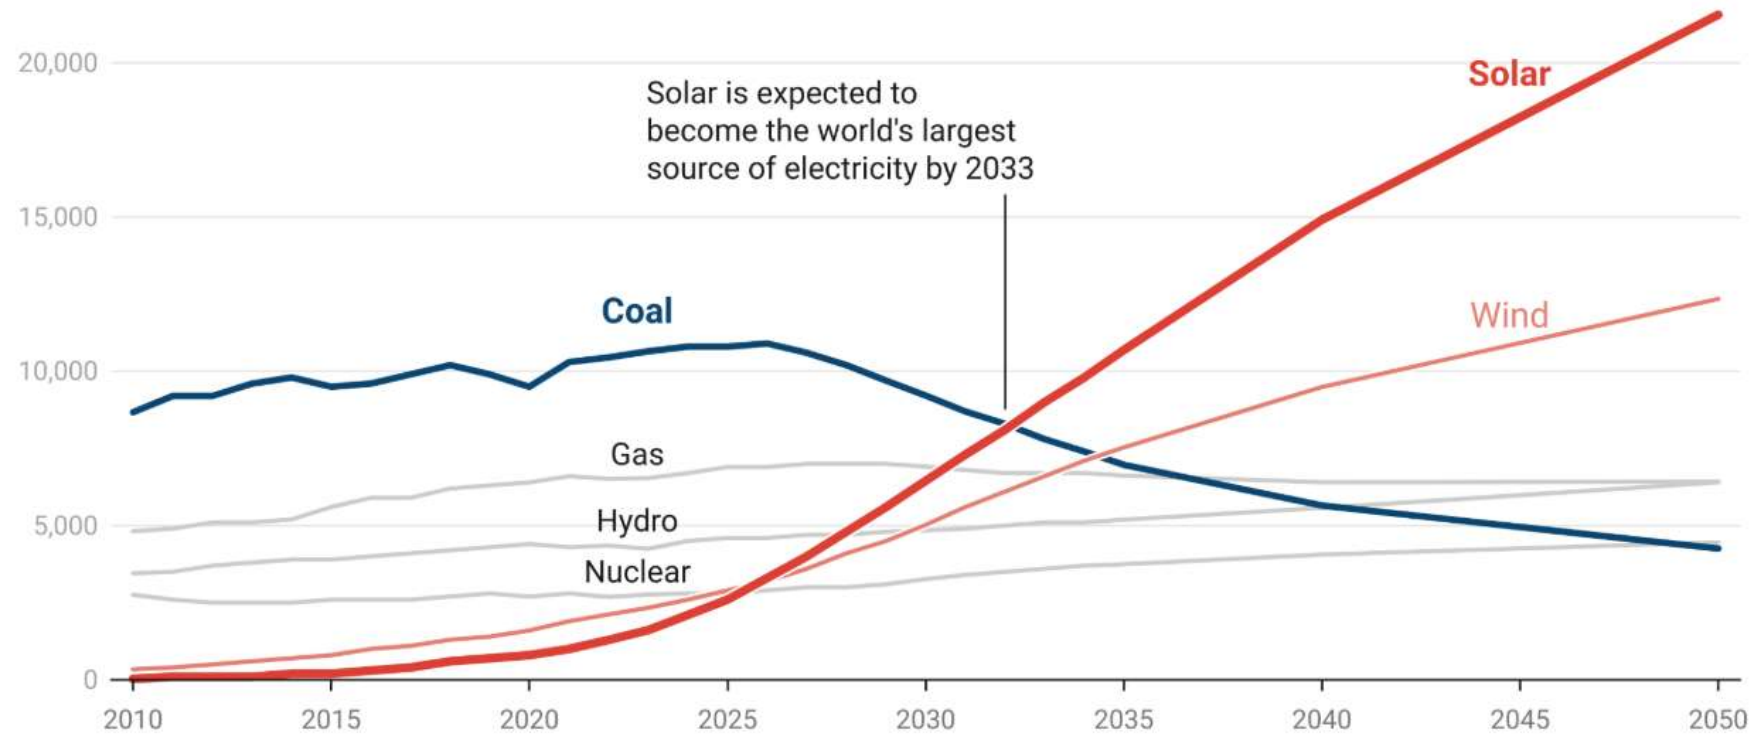


Source: World Energy Outlook 2024

CarbonBrief
CLEAR ON CLIMATE

Global electricity generation by source, TWh, 2010-2050. Source: World Energy Outlook 2024.

Solar, Installed Global Production from 2000 to 2023

Installed solar production per year (photo voltaics) 2000 to 2023

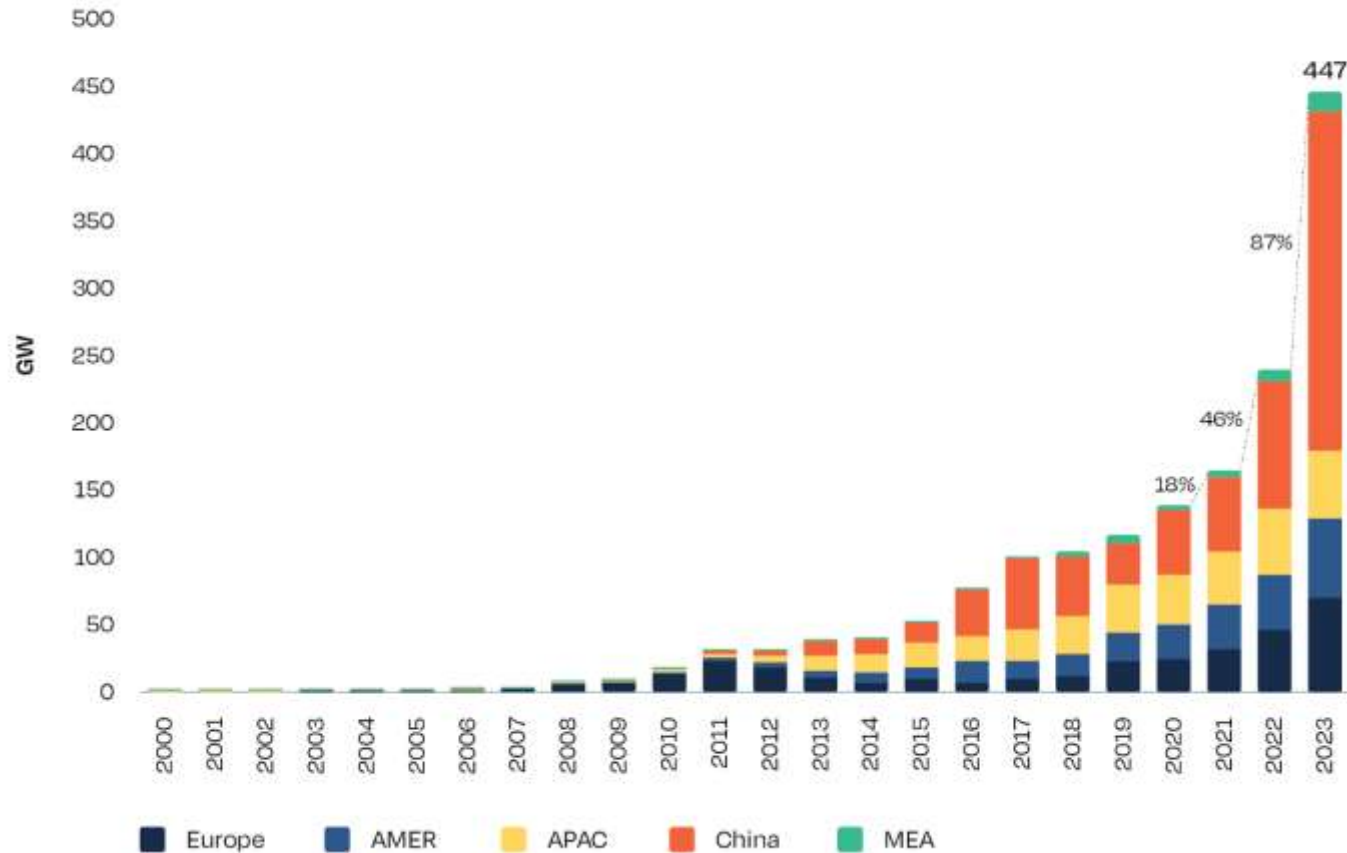

Renewable energy,
Increased **50% year**
2023, 75% is solar

China is leading:
Installed solar 2023
same as the whole
world 2022.
Increase wind power
+66%

Source: Global Market Outlook for Solar Power 2024-2028. Solar Power Europe.
MEA: Middle East and Africa
APAC: Asia and Pacific (not China)
AMER: America

Sustainable Society Necessary for Human Survival

Almost Sustainable

- India, recently 1.4 ton CO₂/person/year
- Healthy vegetarian food
- Small-scale agriculture
- Small-scale shops
- Simpler life-style (Mahatma Gandhi)

Non-sustainable

- USA 17 ton CO₂, Sweden 7 ton CO₂/yr
- High meat consumption (1 kg beef uses ca 4000 L water for production)
- Hamburgers, unhealthy , includes beef
- Energy-consuming mechanized agriculture
- Transport dependent shopping centers
- Stressful materialistic lifestyle



Gandhi – role model for future less materialistic life style

Brief Modelica History

- First Modelica design group meeting in fall 1996
 - International group of people with expert knowledge in both language design and physical modeling
 - Industry and academia
- Modelica Versions
 - 1.0 released September 1997
 - 2.0 released March 2002
 - 2.2 released March 2005
 - 3.0 released September 2007
 - 3.1 released May 2009
 - 3.2 released March 2010
 - 3.3 released May 2012
 - 3.2 rev 2 released November 2013
 - 3.3 rev 1 released July 2014
 - 3.4 released April 2017
 - 3.5 released February 2021
 - 3.6 released March 2023
- Modelica Association was established in 2000 in Linköping
 - Open, non-profit organization

Modelica 3.6 Language Standard Latest Release March 2023

- The Modelica language standard is in active development
- The Modelica 3.6 standard contains almost 130 (mostly small) updates and clarifications compared to the previous Modelica 3.5
- Aiming at support for larger and more complex system models
- Aiming at better portability of models



Modelica® – A Unified Object-Oriented Language
for Systems Modeling

Language Specification

Version 3.6

March 9, 2023

Modelica Association

Abstract

This document defines the Modelica¹ language, version 3.6, which is developed by the Modelica Association, a non-profit organization with seat in Linköping, Sweden. Modelica is a freely available, object-oriented language for modeling of large, complex, and heterogeneous systems. It is suited for multi-domain modeling, for example, mechatronic models in robotics, automotive and aerospace applications involving mechanical, electrical, hydraulic control and state machine subsystems, process oriented applications and generation and distribution of electric power. Models in Modelica are mathematically described by differential, algebraic and discrete equations. No particular variable needs to be solved for manually. A Modelica tool will have enough information to decide that automatically. Modelica is designed such that available, specialized algorithms can be utilized to enable efficient handling of large models having more than one hundred thousand equations. Modelica is suited and used for hardware-in-the-loop simulations and for embedded control systems. More information is available at <https://modelica.org>.

¹Modelica is a registered trademark of the Modelica Association.

Modelica Conferences

- The 1st International Modelica conference October, 2000
- The 2nd International Modelica conference March 18-19, 2002
- The 3rd International Modelica conference November 5-6, 2003 in Linköping, Sweden
- The 4th International Modelica conference March 6-7, 2005 in Hamburg, Germany
- The 5th International Modelica conference September 4-5, 2006 in Vienna, Austria
- The 6th International Modelica conference March 3-4, 2008 in Bielefeld, Germany
- The 7th International Modelica conference Sept 21-22, 2009 in Como, Italy
- The 8th International Modelica conference March 20-22, 2011 in Dresden, Germany
- The 9th International Modelica conference Sept 3-5, 2012 in Munich, Germany
- The 10th International Modelica conference March 10-12, 2014 in Lund, Sweden
- The 11th International Modelica conference Sept 21-23, 2015 in Versailles, Paris
- The 12th International Modelica conference May 15-17, 2017 in Prague, Czech Rep
- The 13th International Modelica conference March 4-6, 2019, Regensburg, Germany
- The 14th International Modelica conference Sept 20-24, 2021, Linköping, Sweden
- The 15th International Modelica conference Oct 9-11, 2023, Aachen, Germany
- Also: Asian Modelica conferences 2016, 2017, 2018, 2020, 2022
- Also: US Modelica conference 2018, 2020, 2022


Exercises Part I

Hands-on graphical modeling


(15 minutes)

Exercises Part I – Basic Graphical Modeling

- (See instructions on next two pages)
- Start the OMEdit editor (part of OpenModelica)
- Draw the RLCircuit
- Simulate

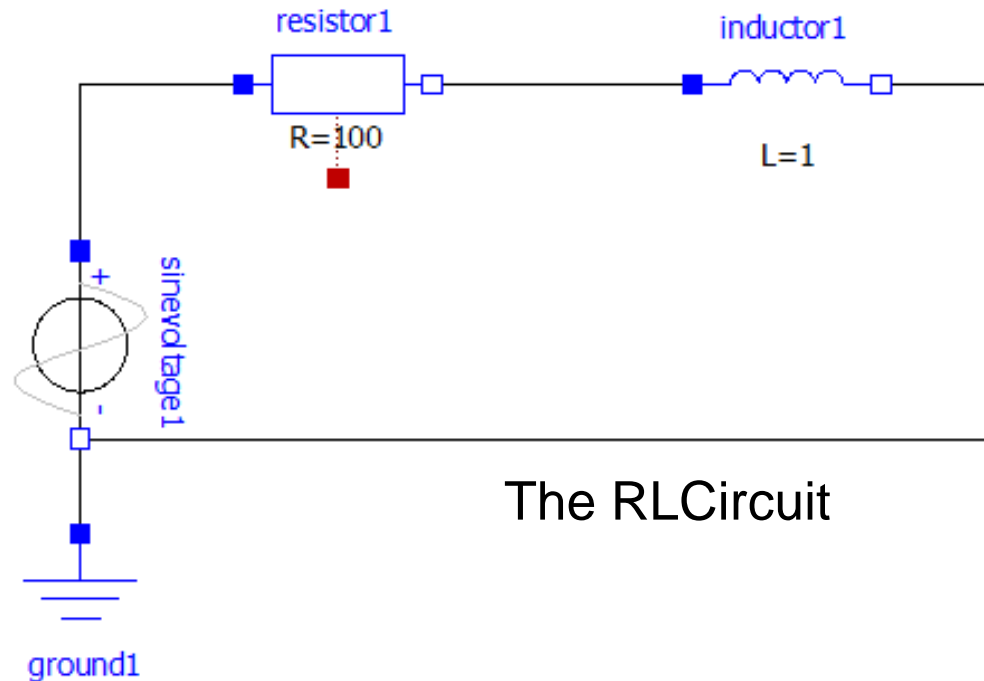

The RLCircuit

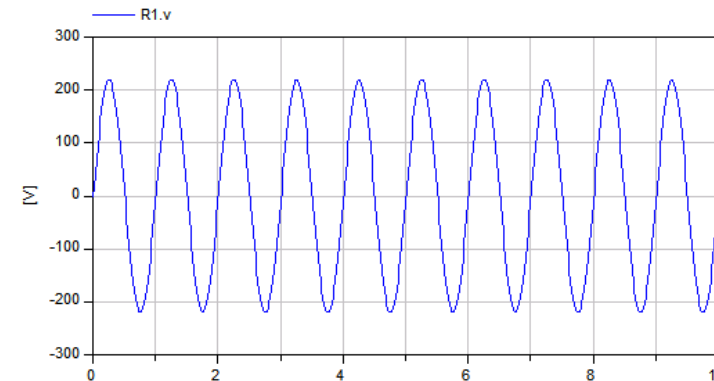

Simulation


Exercises Part I – OMEdit Instructions (Part I)

- Start OMEdit from the Program menu under OpenModelica
- Go to **File** menu and choose **New Modelica Class**, and then select **Model**.
- E.g. write *RLCircuit* as the model name.
- For more information on how to use OMEdit, go to **Help** and choose **User Manual** or press **F1**.

Under the **Modelica Library**:


- Contains The standard Modelica library components
- The **Modelica files** contains the list of models you have created.

Exercises Part I – OMEdit Instructions (Part II)


- For the RLCircuit model, **browse** the Modelica standard library and **add** the following component models:
 - Add `Ground`, `Inductor` and `Resistor` component models from `Modelica.Electrical.Analog.Basic` package.
 - Add `SineVoltage` component model from `Modelica.Electrical.Analog.Sources` package.
- Make the corresponding **connections** between the component models as shown in the previous slide.
- To **draw a connection line**: first single-click on a connector box; then start drawing while keeping the mouse button down; after drawing a little you can release the mouse button and continue drawing.
- **Simulate** the model
 - Go to the Simulation menu and choose simulate or click on the simulate button  in the toolbar.
- **Plot** the instance variables
 - Once the simulation is completed, a plot variables list will appear on the right side. Select the variable that you want to plot.

Part II

Modelica environments and OpenModelica

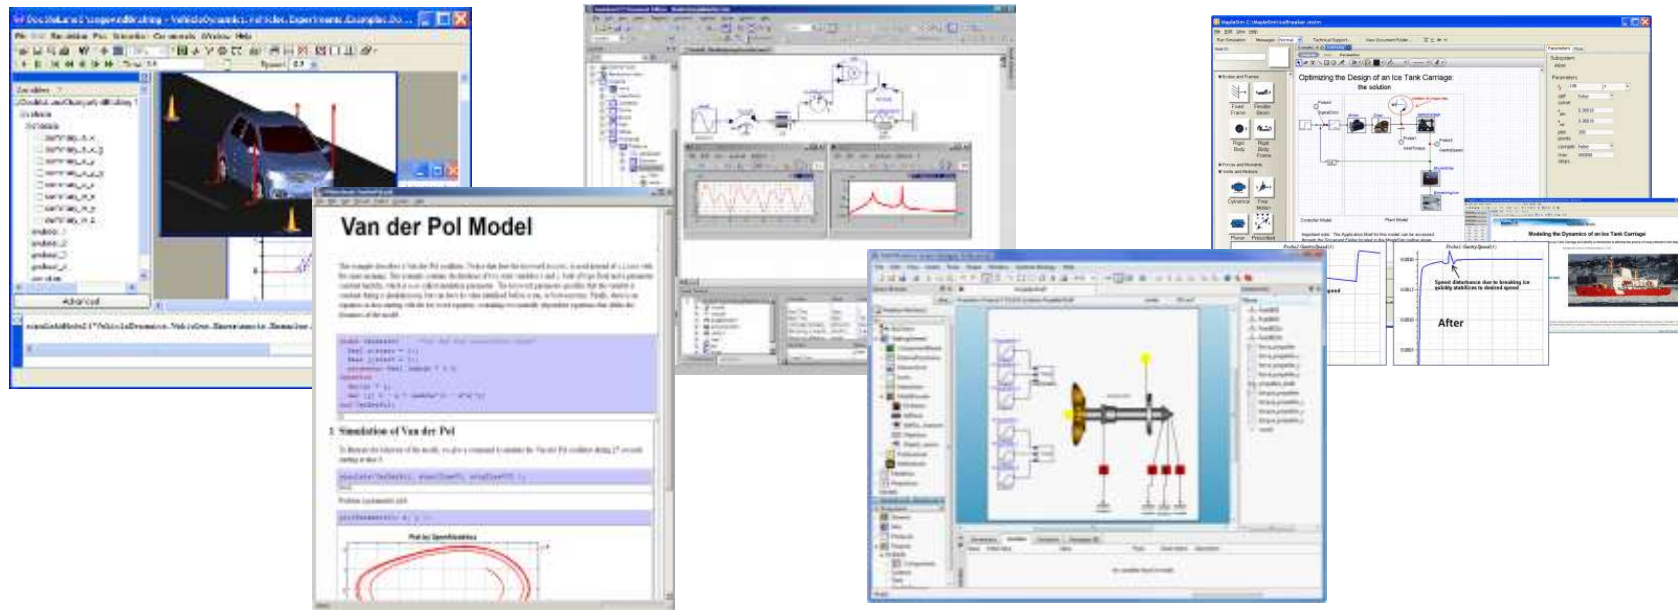


Dymola

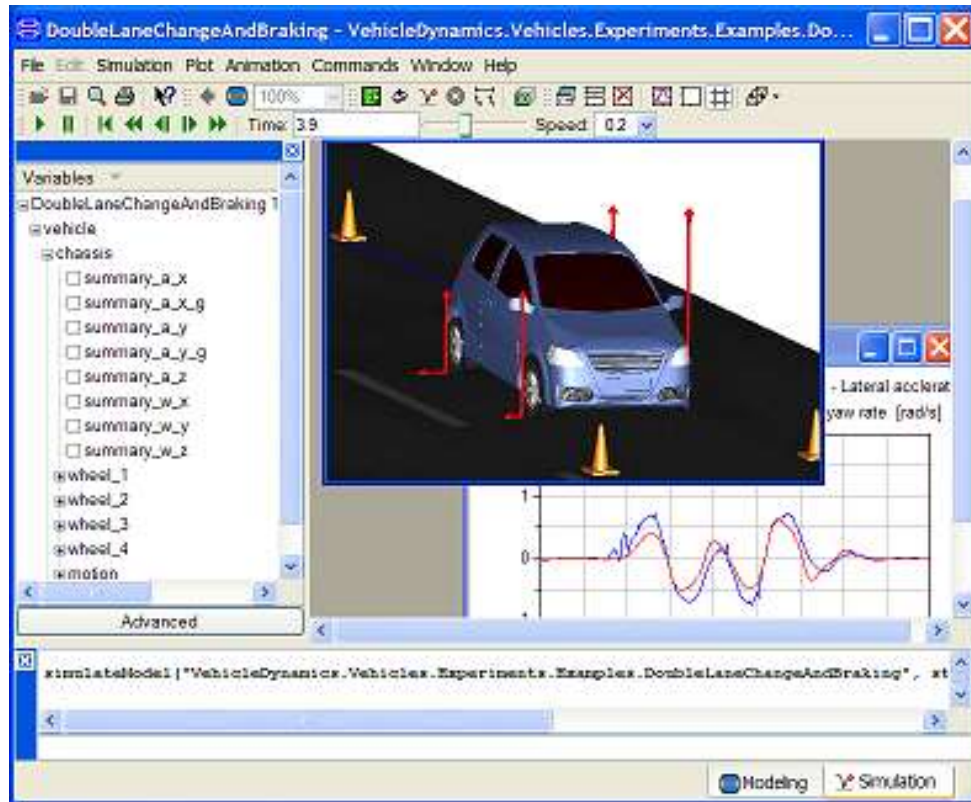

- Dassault Systemes Sweden
- Sweden
- First Modelica tool on the market
- Initial main focus on automotive industry
- www.dymola.com


Wolfram System Modeler – Wolfram MathCore

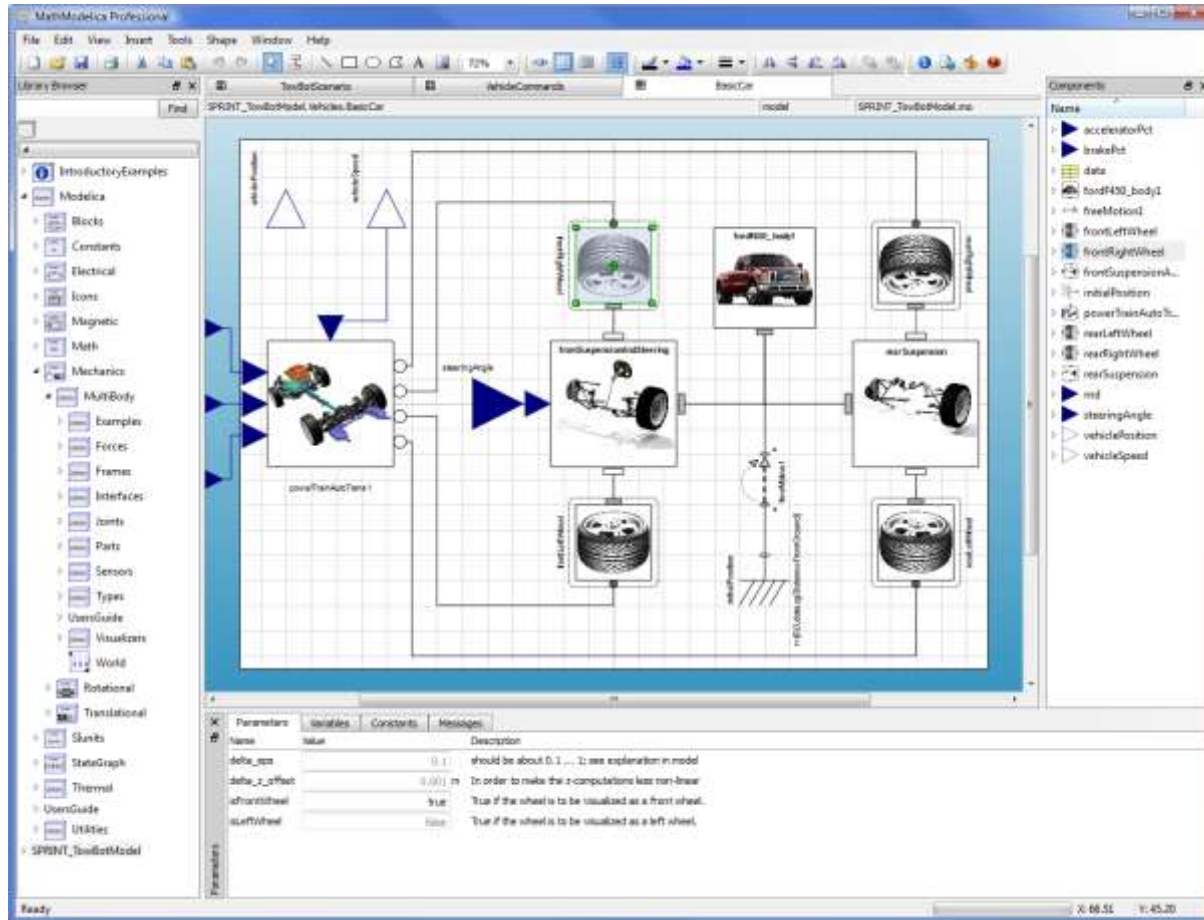


Courtesy
Wolfram
Research

Car model graphical view

- Wolfram Research
- USA, Sweden
- General purpose
- Mathematica integration
- www.wolfram.com
- www.mathcore.com

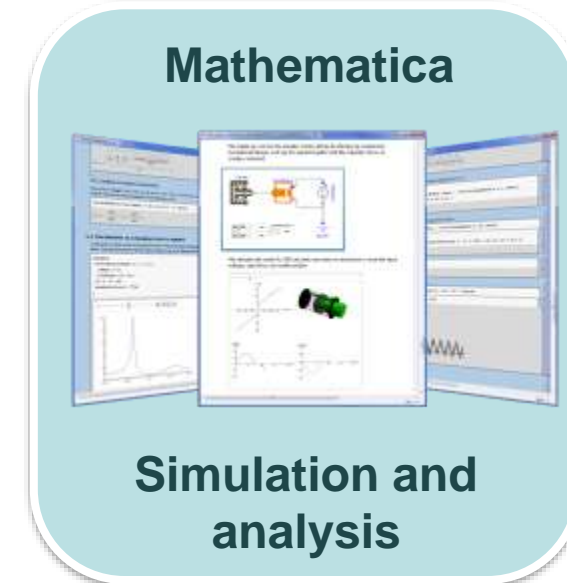


Simulation X

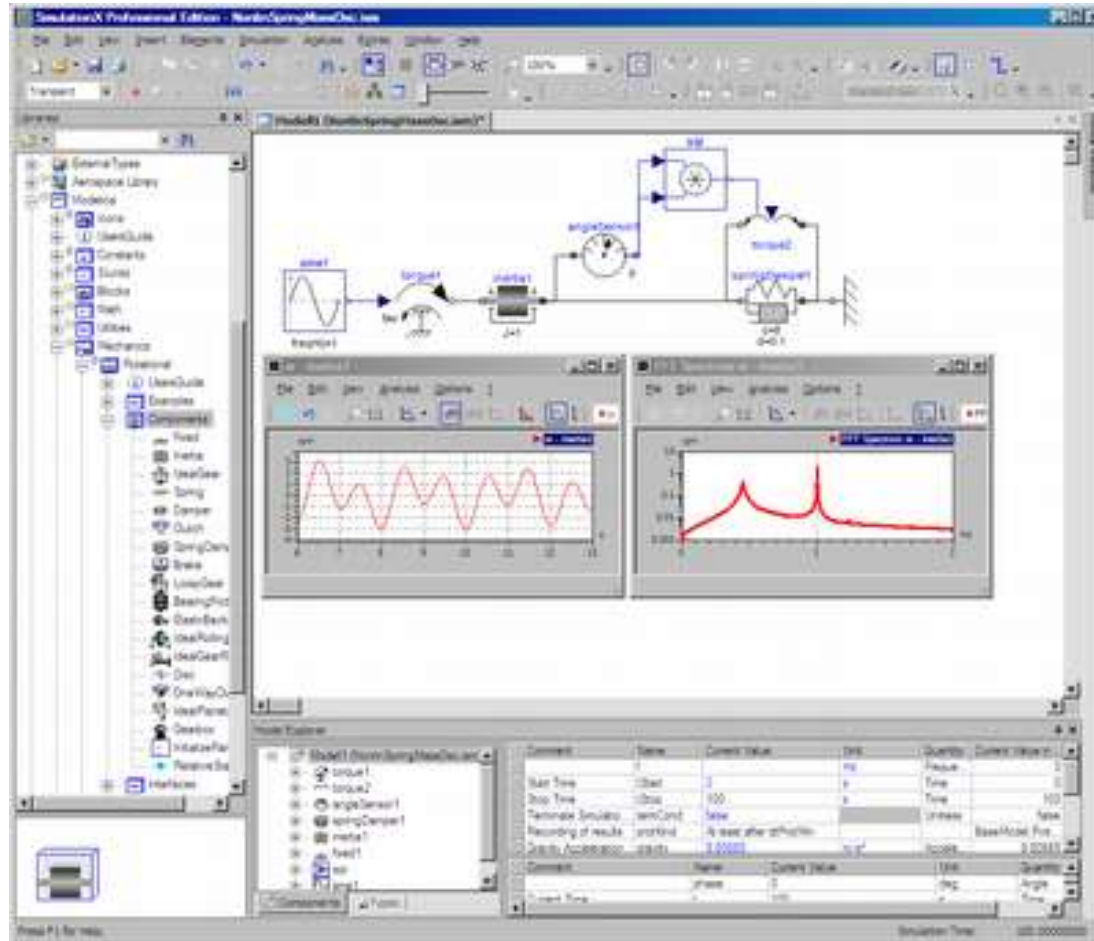

- ITI Gmbh (Part of ESI Group)
- Germany
- Mechatronic systems
- www.simulationx.com

MapleSim

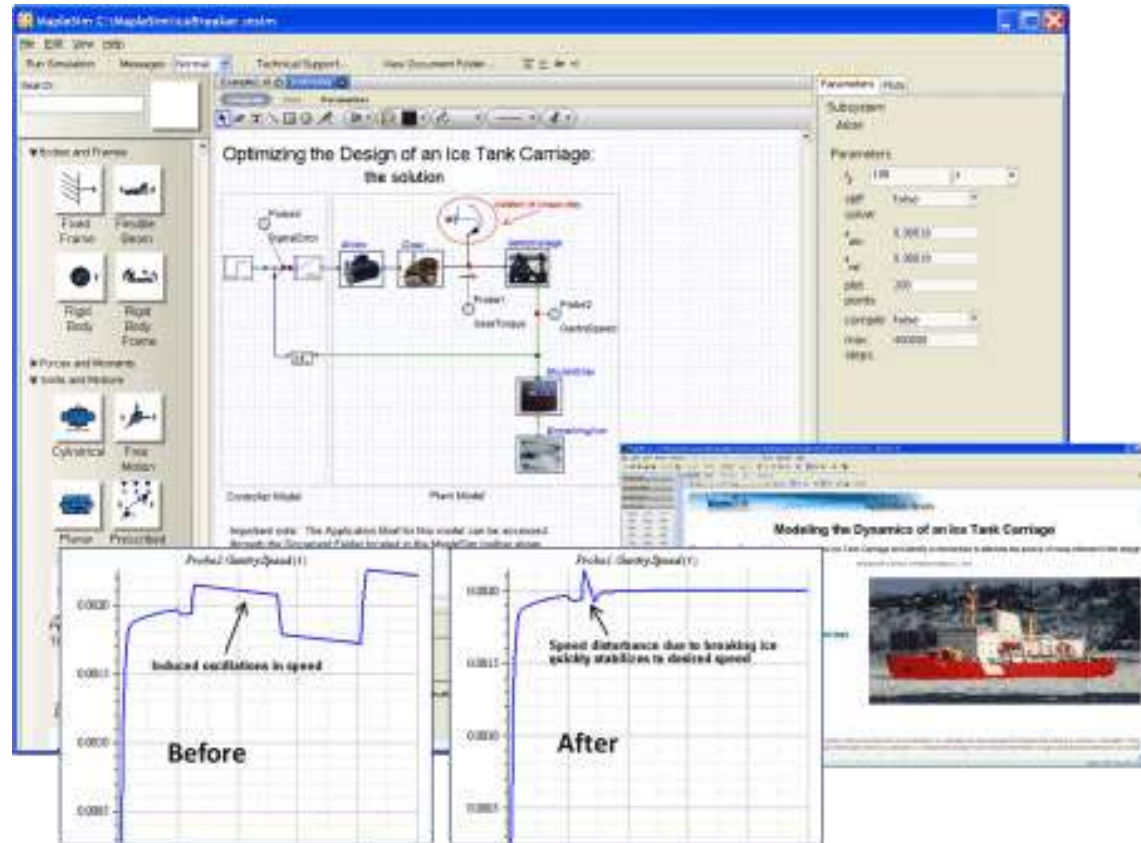

- Maplesoft
- Canada
- Integrated with Maple
- www.maplesoft.com

Modelon



Modelon Library Suite

Powered by Modelica

Our suite of libraries, built on the Modelica open standard, delivers state-of-the-art system models for a wide range of industrial applications.



Modelon Creator Suite

Our creator suite is a powerful platform for model creation, automation, simulation and optimization.



Modelon Deployment Suite


Powered by FMI

Our comprehensive suite of deployment products, built on the FMI open standard, enables collaboration and rapid deployment of system models across multiple platforms, varying tools, and organizations.

- Modelon
- Sweden and International
- Library Suite
- Creator Suite with Impact product and Optimica Compiler Toolbox and WAMS model editor
- www.modelon.com

The OpenModelica Environment

www.OpenModelica.org

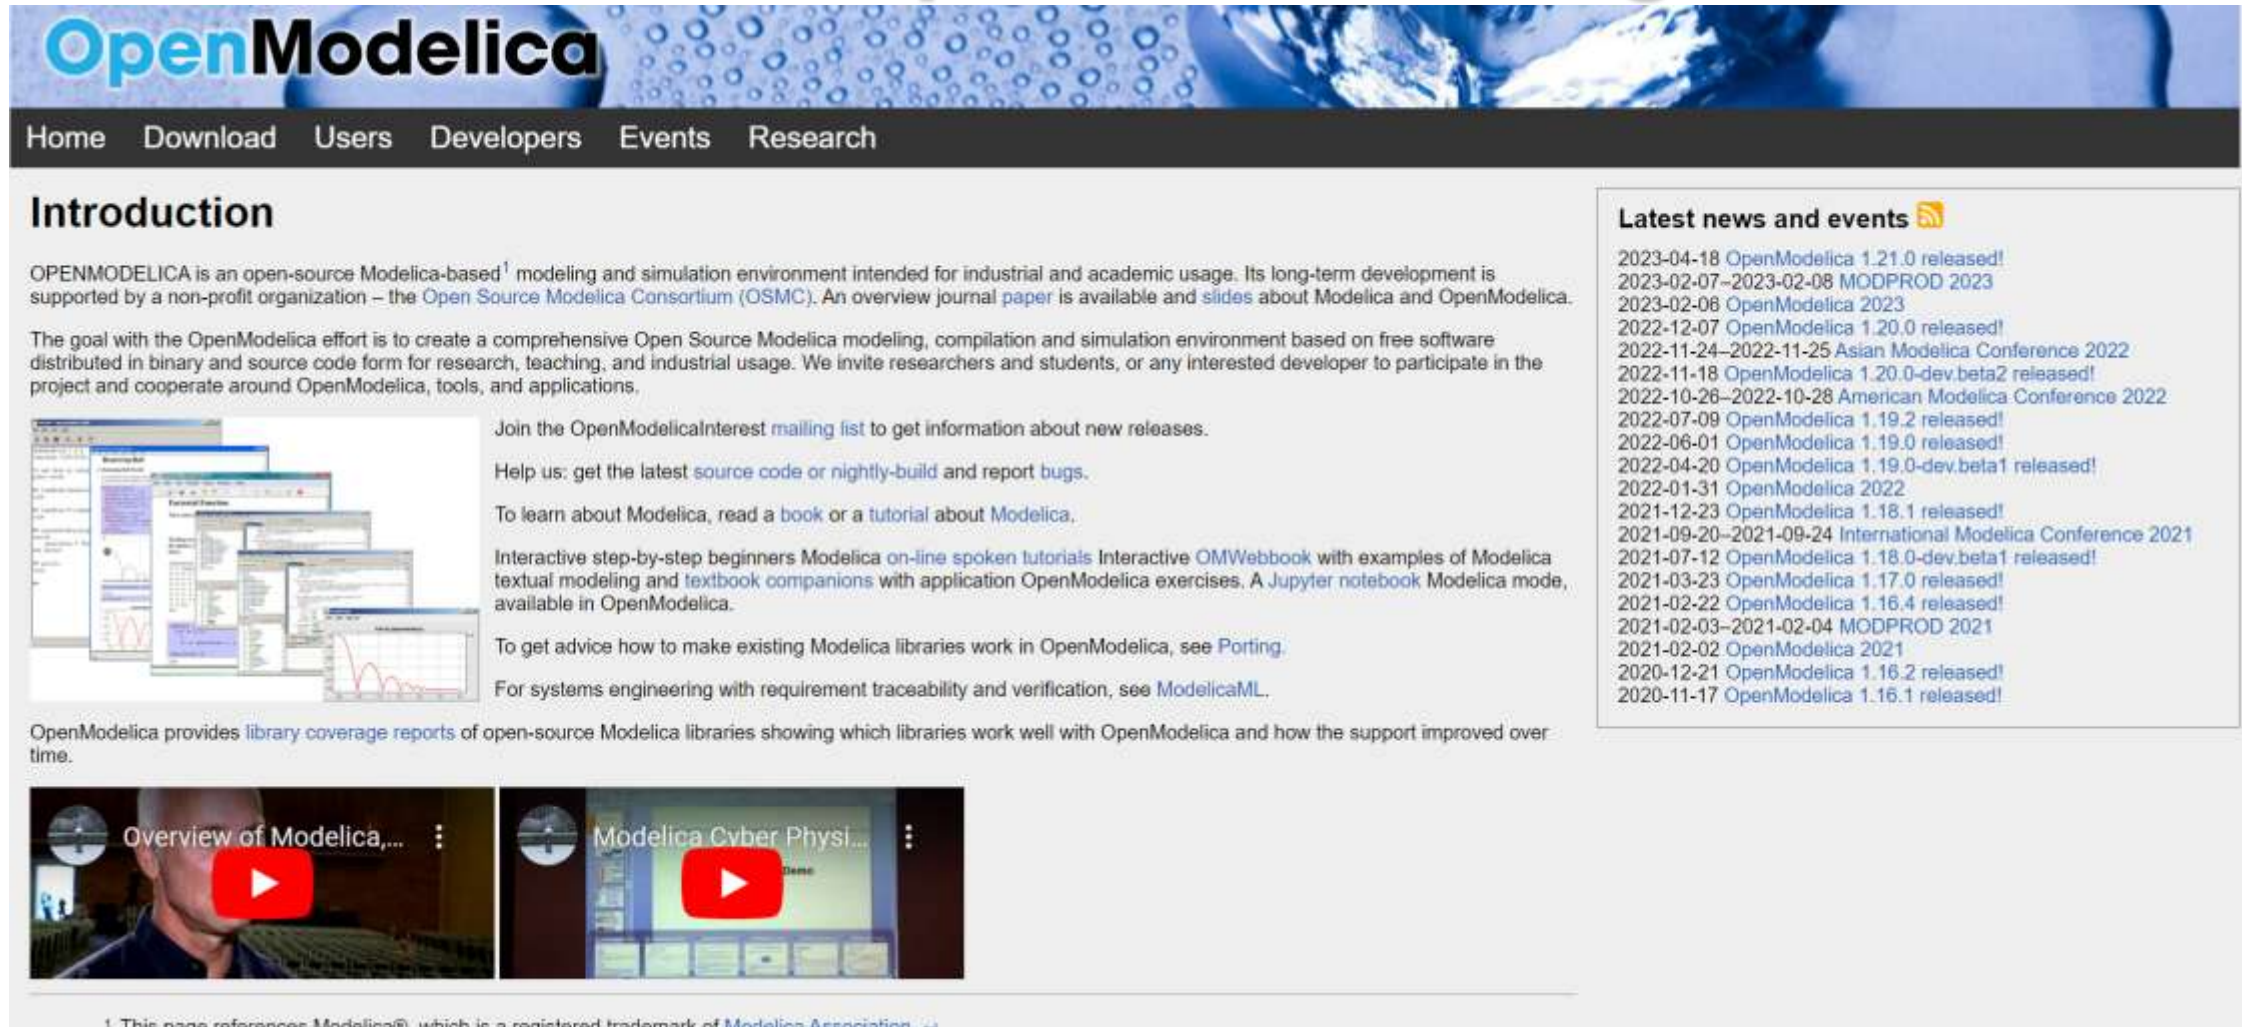

The screenshot shows the OpenModelica website homepage. At the top is the OpenModelica logo. Below it is a navigation menu with links for Home, Download, Users, Developers, Events, and Research. The main content area is titled 'Introduction' and contains several paragraphs of text, a list of links for getting started, and a 'Latest news and events' section on the right. At the bottom, there are two video thumbnails and a footnote.


OpenModelica

Home Download Users Developers Events Research

Introduction

OPENMODELICA is an open-source Modelica-based¹ modeling and simulation environment intended for industrial and academic usage. Its long-term development is supported by a non-profit organization – the [Open Source Modelica Consortium \(OSMC\)](#). An [overview journal paper](#) is available and [slides](#) about Modelica and OpenModelica.

The goal with the OpenModelica effort is to create a comprehensive Open Source Modelica modeling, compilation and simulation environment based on free software distributed in binary and source code form for research, teaching, and industrial usage. We invite researchers and students, or any interested developer to participate in the project and cooperate around OpenModelica, tools, and applications.



Join the [OpenModelicaInterest mailing list](#) to get information about new releases.

Help us: get the latest [source code](#) or [nightly-build](#) and report bugs.



To learn about Modelica, read a [book](#) or a [tutorial](#) about Modelica.

Interactive step-by-step beginners Modelica [on-line spoken tutorials](#) Interactive [OMWebbook](#) with examples of Modelica textual modeling and [textbook companions](#) with application OpenModelica exercises. A [Jupyter notebook](#) Modelica mode, available in OpenModelica.

To get advice how to make existing Modelica libraries work in OpenModelica, see [Porting](#).

For systems engineering with requirement traceability and verification, see [ModelicaML](#).

OpenModelica provides [library coverage reports](#) of open-source Modelica libraries showing which libraries work well with OpenModelica and how the support improved over time.




Latest news and events

- 2023-04-18 [OpenModelica 1.21.0 released!](#)
- 2023-02-07–2023-02-08 [MODPROD 2023](#)
- 2023-02-06 [OpenModelica 2023](#)
- 2022-12-07 [OpenModelica 1.20.0 released!](#)
- 2022-11-24–2022-11-25 [Asian Modelica Conference 2022](#)
- 2022-11-18 [OpenModelica 1.20.0-dev.beta2 released!](#)
- 2022-10-26–2022-10-28 [American Modelica Conference 2022](#)
- 2022-07-09 [OpenModelica 1.19.2 released!](#)
- 2022-06-01 [OpenModelica 1.19.0 released!](#)
- 2022-04-20 [OpenModelica 1.19.0-dev.beta1 released!](#)
- 2022-01-31 [OpenModelica 2022](#)
- 2021-12-23 [OpenModelica 1.18.1 released!](#)
- 2021-09-20–2021-09-24 [International Modelica Conference 2021](#)
- 2021-07-12 [OpenModelica 1.18.0-dev.beta1 released!](#)
- 2021-03-23 [OpenModelica 1.17.0 released!](#)
- 2021-02-22 [OpenModelica 1.16.4 released!](#)
- 2021-02-03–2021-02-04 [MODPROD 2021](#)
- 2021-02-02 [OpenModelica 2021](#)
- 2020-12-21 [OpenModelica 1.16.2 released!](#)
- 2020-11-17 [OpenModelica 1.16.1 released!](#)

¹ This name references Modelica®, which is a registered trademark of Modelica Association. ↗

OpenModelica – Free Open Source Tool developed by the Open Source Modelica Consortium (OSMC)



- Graphical editor
- Model compiler and simulator
- Debugger
- Performance analyzer
- Dynamic optimizer
- Symbolic modeling
- Parallelization
- Electronic Notebook and OMWebbook for teaching
- Spokentutorial for teaching

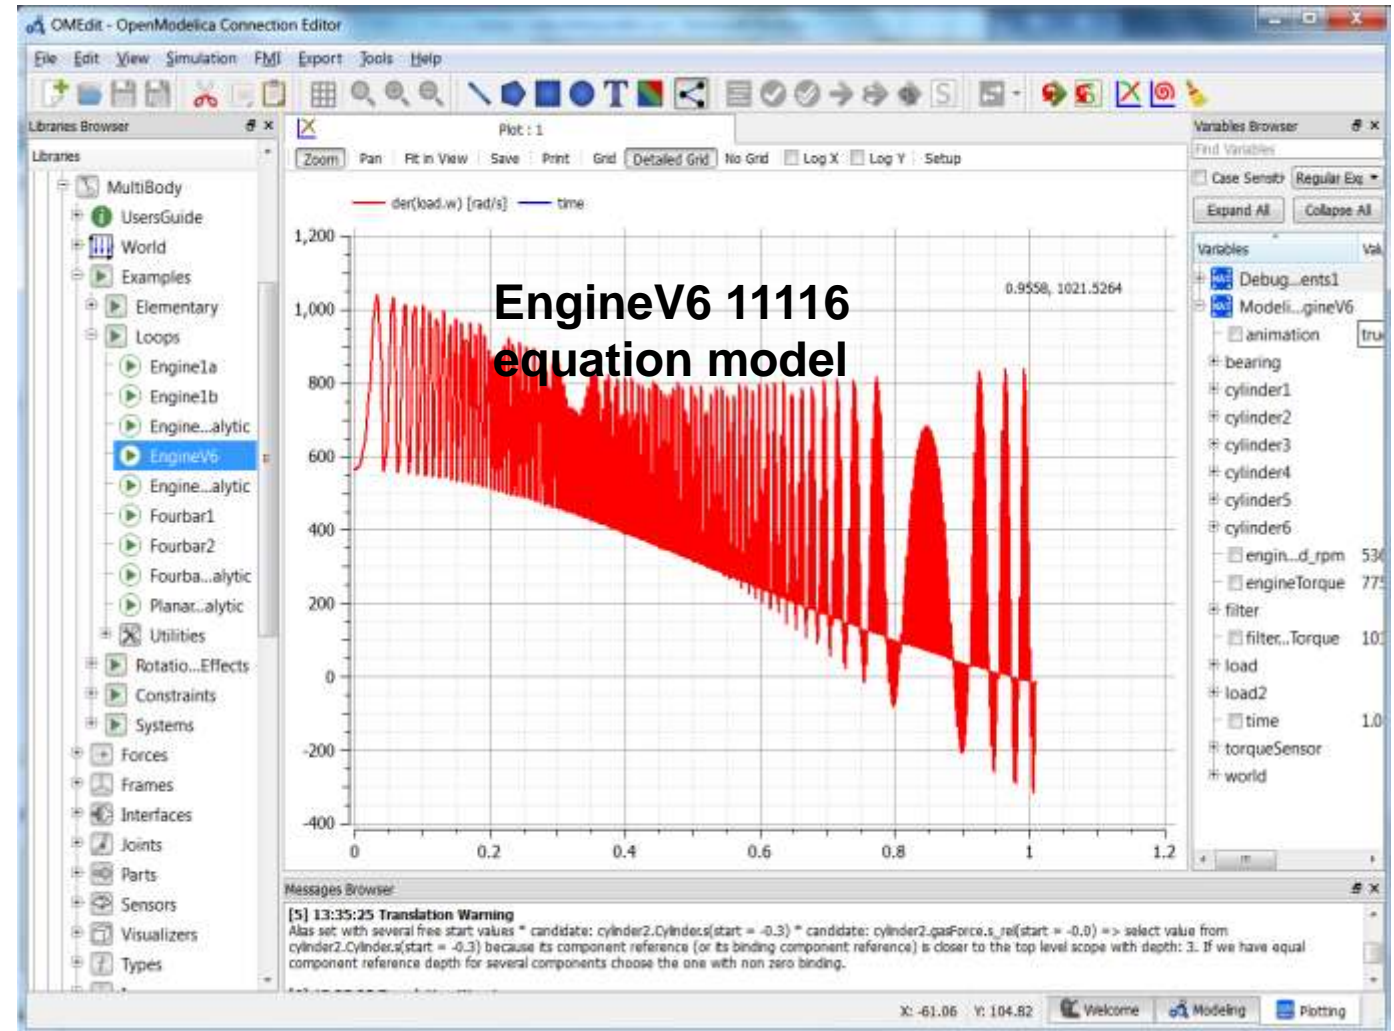

The OpenModelica Open Source Environment

www.openmodelica.org

- **Advanced Interactive Modelica compiler (OMC)**
 - Supports most of the Modelica Language
 - **Modelica, Python, Julia, Matlab scripting**
- **OMSimulator – FMI Simulation/Co-simulation**
- **Basic environment for creating models**
 - **OMShell** – an interactive command handler
 - **OMNotebook** – a literate programming notebook
 - **MDT** – an advanced textual environment in Eclipse
- **OMEdit** graphic Editor
- **OMDebugger** for equations
- **OMOptim** optimization tool
- **OM Dynamic optimizer** collocation
- **ModelicaML** UML Profile
- **MetaModelica** extension
- **ParModelica** extension

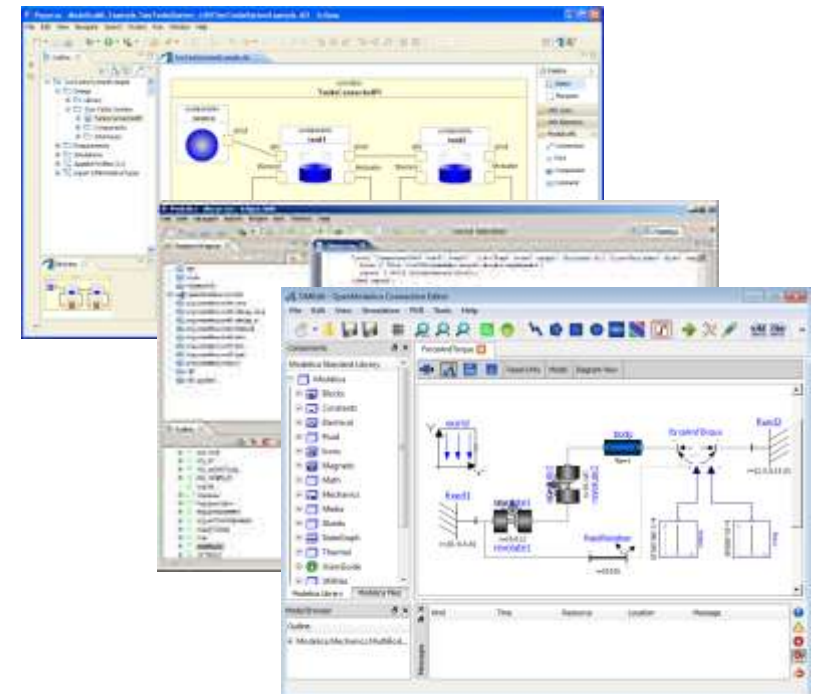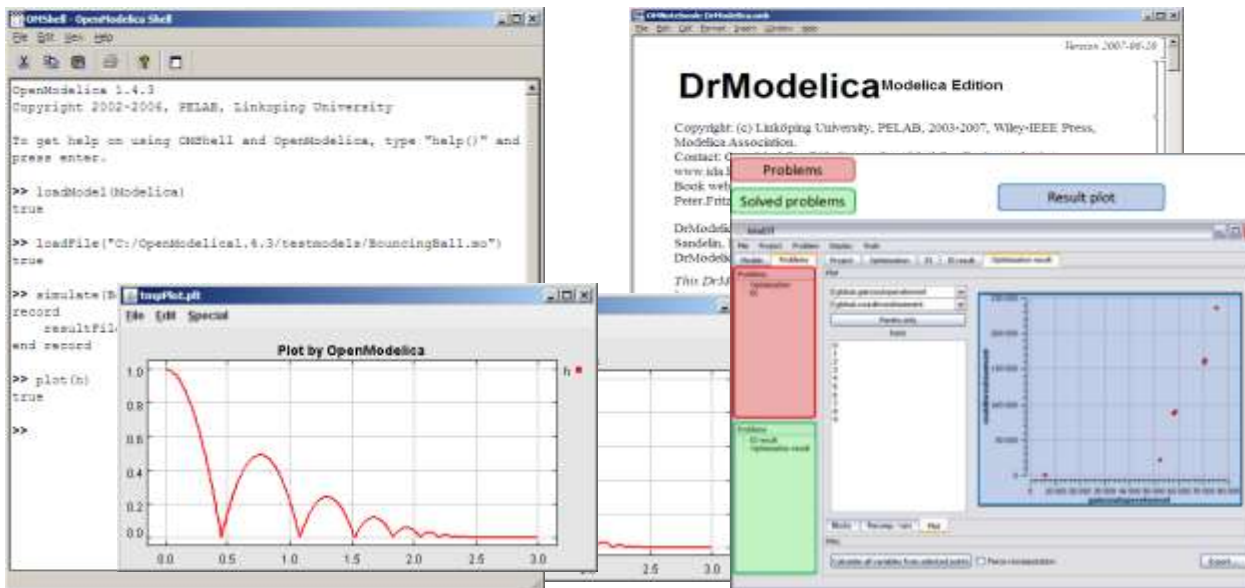


OSMC – International Consortium for Open Source Model-based Development Tools, 55 members Feb 2025

Founded Dec 4, 2007

Open-source community services

- Website and Support Forum
- Version-controlled source base
- Bug database
- Development courses
- www.openmodelica.org

Commits Statistics

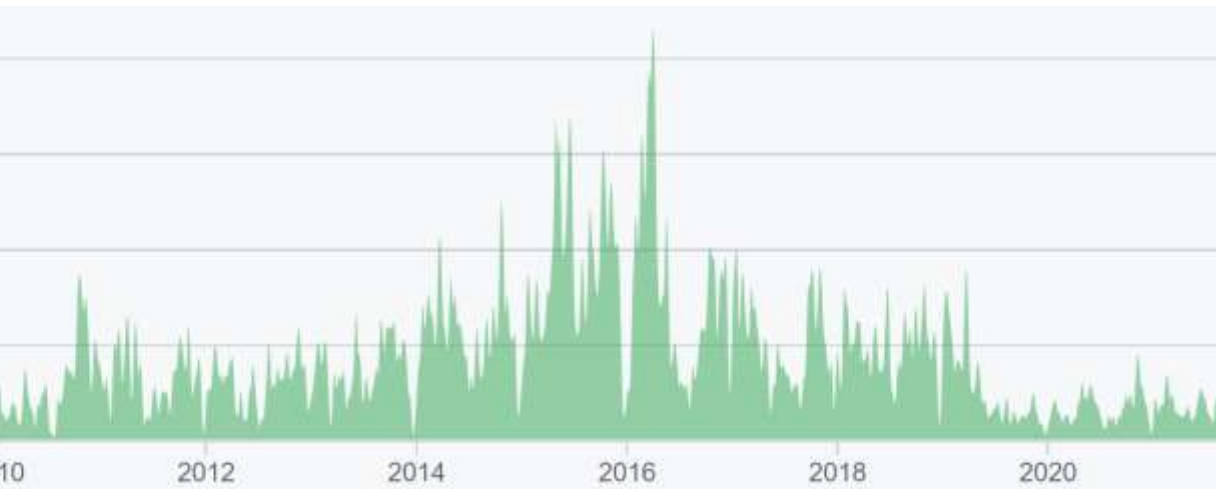


Industrial members

- ABB AB, Sweden
- Bosch Rexroth AG, Germany
- Creative Connections, Prague
- DHI, Aarhus, Denmark
- Dynamica s.r.l., Cremona, Italy
- EDF, Paris, France
- Fraunhofer IWES, Bremerhaven
- Fraunhofer FCC, Gthenburg
- GSIMX Beijing Technology, China
- Hoerbiger Wien, Austria
- INRIA, Rennes, France
- ISID Dentsu, Tokyo, Japan
- Modelicon LLP, Bangalore, India
- Shanghai Duanyan Inf Tech China
- Maplesoft, Canada
- RTE France, Paris, France
- Saab AB, Linköping, Sweden
- Shanghai Duanyan Inf Techn., China
- SIL3X, Paris, France
- Simtek, Nanjing, China
- SmartFluidPower, Italy
- Swegon AB, Gothenburg, Sweden
- TLK Thermo, Germany
- Volvo Cars, Sweden
- VTI, Linköping, Sweden
- XRG Simulation, Germany

University members

- Augsburg University, Germany
- Australian Nation Univ., Australia
- Berkeley Lab, California, USA
- Hochschule Bielefeld, HSBI, Germany
- University of Bolivar, Colombia
- TU Braunschweig, Germany
- Univ of Buenos Aires, Argentina
- Univ Catalunya, Spain
- Chalmers Univ, Control, Sweden
- Chalmers Univ, Machine, Sweden
- TU Delft, The Netherlands
- TU Dresden, Germany
- Université Laval, Canada
- TU Hamburg/Harburg Germany
- KU Leuven, Leuven, Belgium
- IT Bombay, Mumbai, India
- Linneaus University, Sweden
- Linköping University, Sweden
- Univ of Maryland, Syst Eng USA
- Univ of Maryland, CEEE, USA
- Politecnico di Milano, Italy
- Mälardalen University, Sweden
- RPI, Troy, USA
- Univ Pisa, Italy
- Univ SouthEast Norway
- Vanderbilt Univ, USA


The OpenModelica Tool Architecture

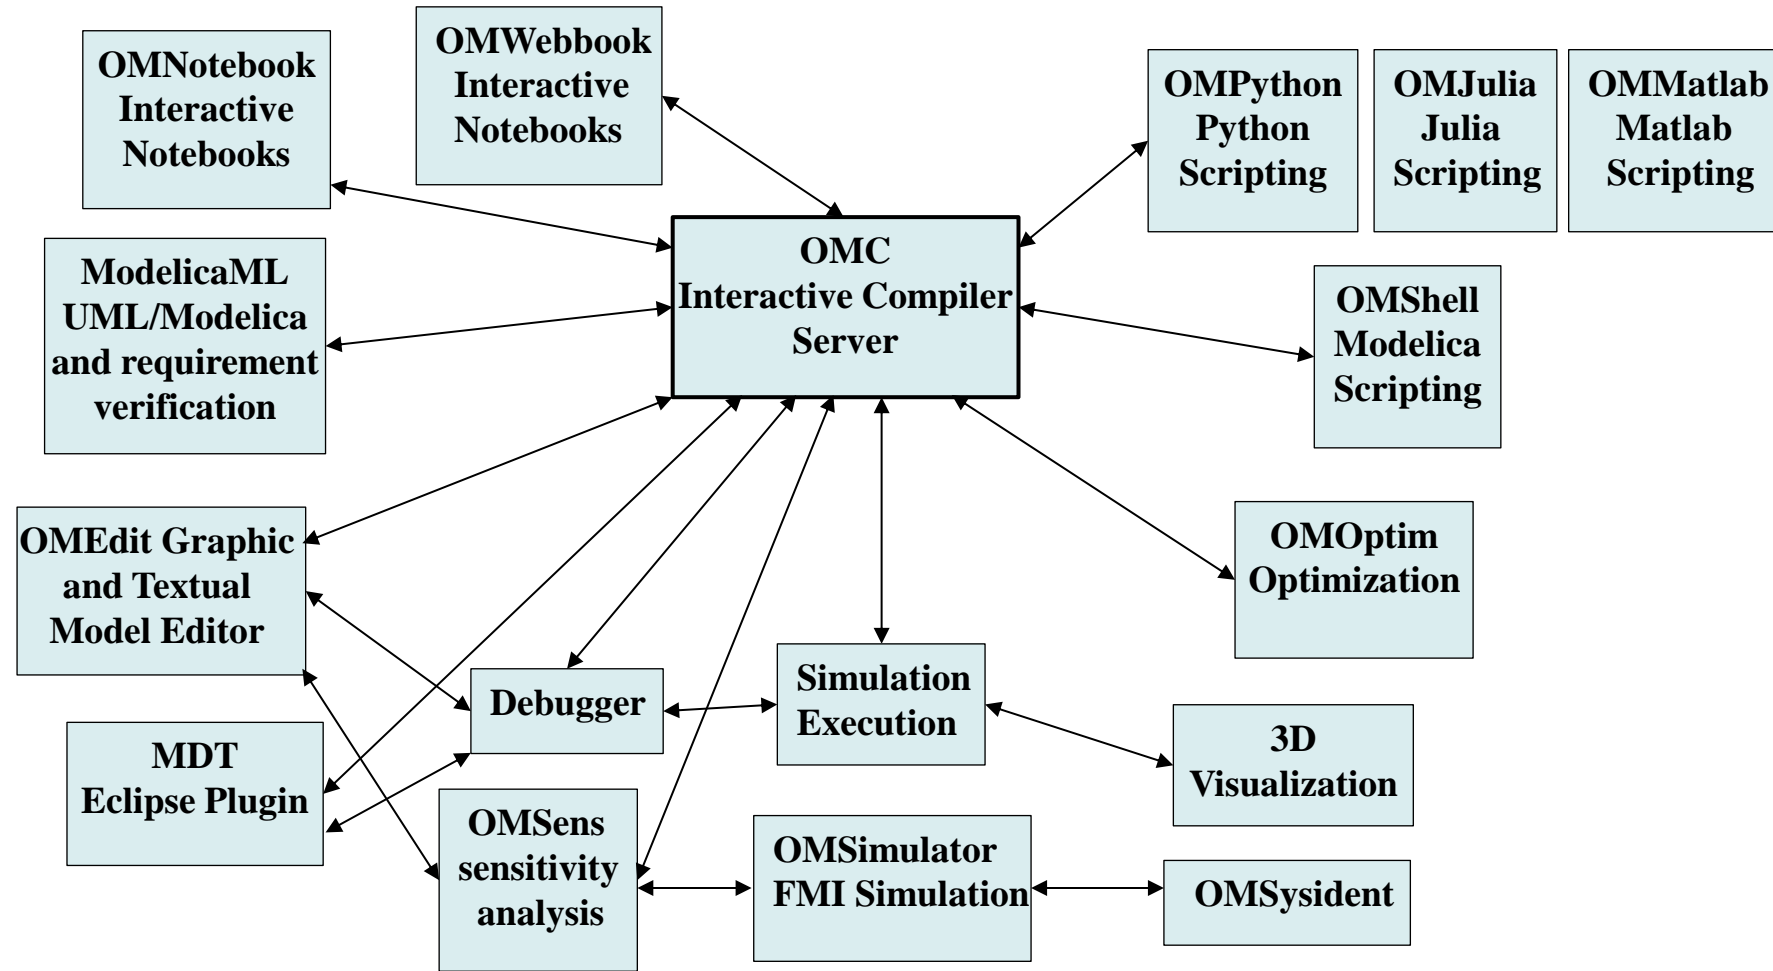

Build System with Regression Testing

- Automatic Nightly build system (using Jenkins), and several multi-core computers
- Regression testing of libraries
- Verification testing comparing results to references

Spoken-Tutorial step-by-step OpenModelica and Modelica Tutorial Using OMEdit. Link from www.openmodelica.org

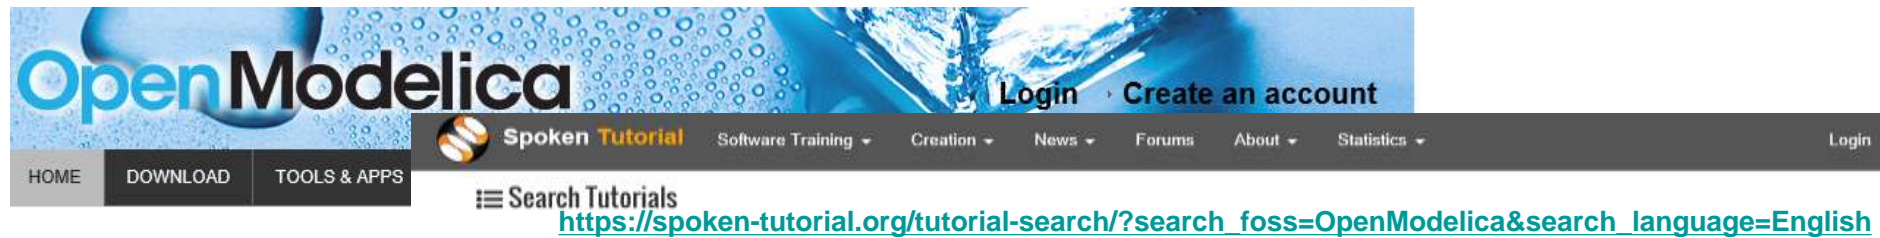

To learn about Modelica, read a [book](#) or a [tutorial](#) about Modelica®.
Interactive step-by-step beginners Modelica [on-line spoken tutorials](#)
Interactive [OMWebbook](#) with examples of Modelica textual modeling

04)

OpenModelica is an open source modelling and simulation environment intended for industrial and academic usage. It is an object oriented declarative multi domain modelling language for complex systems. This environment can be used to work for both steady state as well as dynamic systems. Attractive strategy when dealing with design and optimization problems. As all the equations are solved simultaneously it doesn't matter whether the unknown variable in an input or output variable. [Read more](#)

About 12 results found.

[Instruction Sheet](#)



1. Introduction to OMEdit

Foss : OpenModelica - English

Outline: Introduction to OpenModelica Introduction to OMEdit Perspectives in OMEdit Browsers in OMEdit View icons in OMEdit Open a Class from Libraries Browser Checking for correctness..

Basic



2. Examples through OMEdit

Foss : OpenModelica - English

Outline: Expand Modelica library Expand Electrical library Expand Analog library Open Rectifier Class Compare the values of IDC & Losses time vs Losses plot Expand Mechanics library ..

Basic



3. Developing an equation-based model

Foss : OpenModelica - English

Outline: Introduction to OMEdit Declaration of variables and equations Simulation of a model in

Basic

OMNotebook Electronic Notebook with DrModelica

- Primarily for teaching
- Interactive electronic book
- Platform independent
- Also support for Jupyter notebooks

Commands:

- *Shift-return* (evaluates a cell)
- File Menu (open, close, etc.)
- Text Cursor (vertical), Cell cursor (horizontal)
- Cell types: text cells & executable code cells
- Copy, paste, group cells
- Copy, paste, group text
- Command Completion (shift-tab)



The screenshot shows a web browser window titled "OMNotebook: DrModelica.onb*". The page content includes:

- Version: 2006-04-11
- DrModelica** Modelica Edition
- Copyright: (c) Linköping University, PELAB, 2003-2006, Wiley-IEEE Press, Modelica Association.
Contact: OpenModelica@ida.ltu.se; [OpenModelica Project web site](http://OpenModelica.org)
www.ida.ltu.se/projects/OpenModelica
Book web page: www.mathcore.com/drModelica; Book author: [Peter Fritzson@ida.ltu.se](mailto:Peter.Fritzson@ida.ltu.se)
- DrModelica Authors: (2003 version) Susanna Monemar, Eva-Lena Ljungquist Sandelin, Peter Fritzson, Peter Bounie
DrModelica Authors: (2005 and later updates): Peter Fritzson
- This DrModelica notebook has been developed to facilitate learning the Modelica language as well as providing an introduction to object-oriented modeling and simulation. It is based on and is supplementary material to the Modelica book: Peter Fritzson: "Principles of Object-Oriented Modeling and Simulation with Modelica" (2004), 940 pages, Wiley-IEEE Press, ISBN 0-471-47163-1. All of the examples and exercises in DrModelica and the page references are from that book. Most of the text in DrModelica is also based on that book.*
- Detailed Copyright and Acknowledgment Information**
- Getting Started Using OMNotebook**
- OpenModelica commands**
- Berkeley license OpenModelica**
- 1 A Quick Tour of Modelica**
- 1.1 Getting Started - First Basic Examples**
 - There is a long tradition that the first sample program in any computer language is a trivial program printing the string "Hello World" (p. 19 in Peter Fritzson's book). Since Modelica is an equation based language, printing a string does not make much sense. Instead, our Hello World Modelica program solves a trivial differential equation. The second example shows how you can write a model that solves a [Differential Algebraic Equation System](#) (p. 19). In the [Van der Pol](#) (p. 22) example declaration as well as initialization and prefix usage are shown in a slightly more complicated way.
- 1.2 Classes and Instances**
 - In Modelica objects are created implicitly just by [Declaring Instances of Classes](#) (p. 26). Almost anything in Modelica is a class, but there are some keywords for specific use of the class concept, called

OMNotebook Interactive Electronic Notebook Here Used for Teaching Control Theory

OMNotebook: Kalman.onb

File Edit Cell Format Insert Window Help

1 Kalman Filter

Often we don't have access to the internal states of a system and can only measure the output. We have to reconstruct the state of the system based on these measurements. This is normally done. The idea with an observer is that we feedback the difference of the measured output with the estimation. If the estimation is correct then the difference should be zero.

Another difficulty is that the measured quantities often contain disturbance, i.e. noise.

$$\begin{cases} \dot{\hat{x}} = A\hat{x} + Bu + e \\ \hat{y} = C\hat{x} + v \end{cases}$$

Here e denoting a disturbance in the input signal and v is a measurement error. The quality can be evaluated by the difference

$$K(y(t) - C\hat{x}(t) - Du(t))$$

By using this quantity as feedback we obtain the observer

$$\dot{\hat{x}} = A\hat{x}(t) + Bu(t) + K(y(t) - C\hat{x}(t) - Du(t))$$

Now form the error as

$$\tilde{x} = x - \hat{x}$$

The differential error is

Ready

OMNotebook: Kalman.onb

File Edit Cell Format Insert Window Help

```
model KalmanFeedback
  parameter Real A[1,1] = {{0,1},{1,0}};
  parameter Real B[size(A,1),1] = {{0},{1}};
  parameter Real C[1,size(A,1)] = {{1,0}};
  parameter Real[2,1] K = {2.4;3.4};
  parameter Real[1,2] L = {2.4,3.4};
  parameter Real[:,:] ABL = A-B*L;
  parameter Real[:,:] BL = B*L;
  parameter Real[:,:] S = zeros(size(ABL,2),size(AKC,1));
  parameter Real[:,:] AKC = A-K*C;
  parameter Real[:,:] Anew = {0,1,0,0; -1.4, -3.4, 2.4,3.4; 0,0,-2.4,1;0,0,-2.4,0};
  parameter Real[:,:] Bnew = {0;1;0;0};
  parameter Real[:,:] Fnew = {1;0;0;0};
  stateSpaceNoise Kalman(stateSpace.A=Anew,stateSpace.B=Bnew, stateSpace.C={1,0,0,0},
stateSpace.F = Fnew);
stateSpaceNoise noKalman;
end KalmanFeedback;

simulate(KalmanFeedback,stopTime=3)
plot({Kalman.stateSpace.y[1],noKalman.stateSpace.y[1]})
true
```


Plot by OpenModelica

Legend: Kalman.stateSpace.y[1] (red), noKalman.stateSpace.y[1] (blue)

Ready Ln 12, Col 39

Mathematical Typesetting in OMNotebook and OMWebbook

OMNotebook supports Latex formatting for mathematics

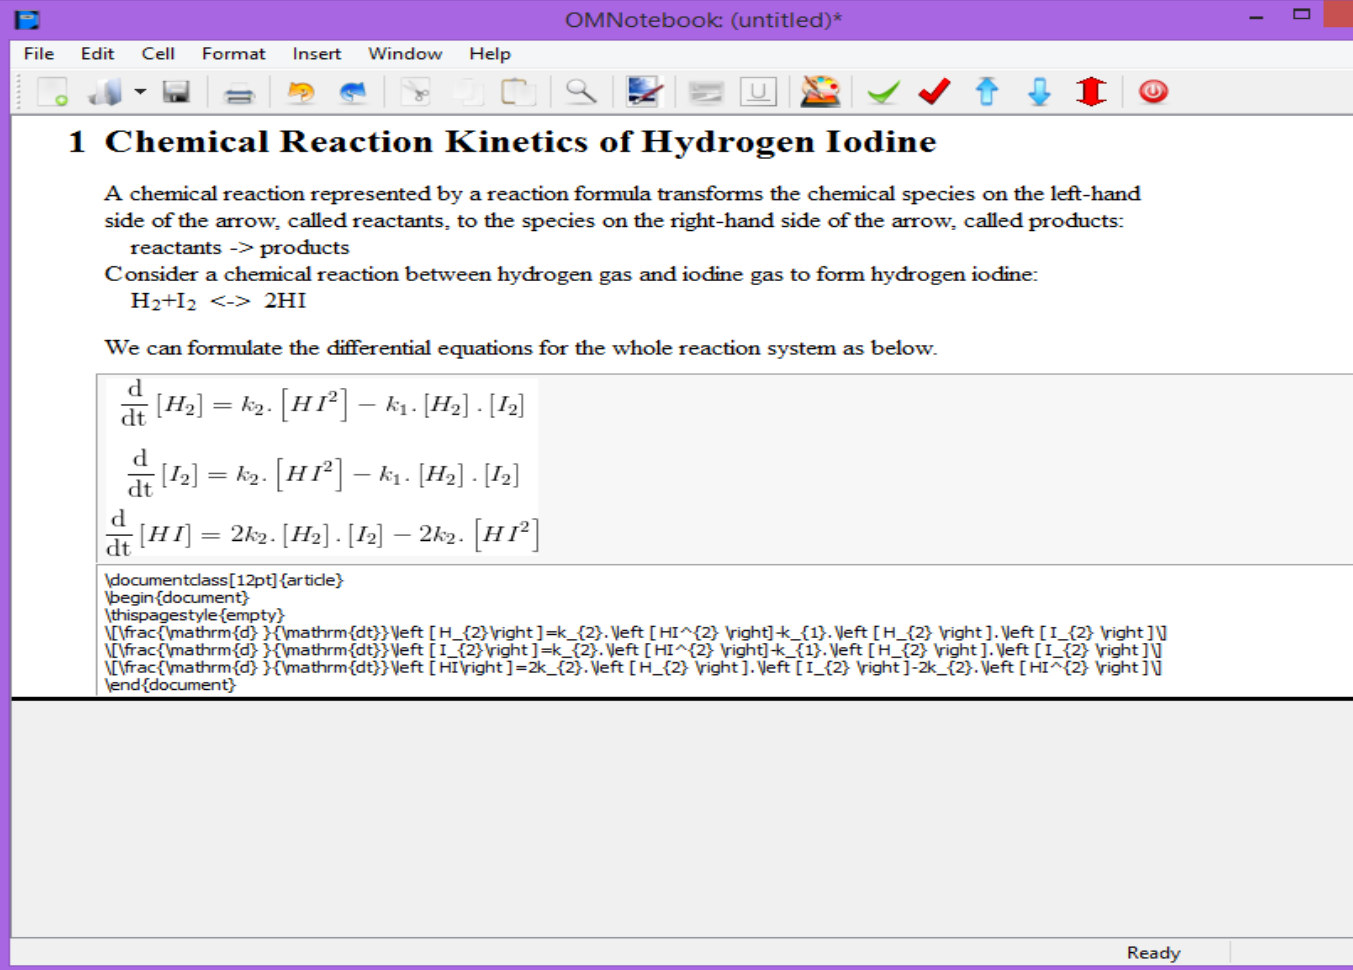

The screenshot shows the OMNotebook application window titled "OMNotebook: (untitled)*". The menu bar includes File, Edit, Cell, Format, Insert, Window, and Help. The toolbar contains various icons for file operations, editing, and execution. The main content area displays the following text:

1 Chemical Reaction Kinetics of Hydrogen Iodine

A chemical reaction represented by a reaction formula transforms the chemical species on the left-hand side of the arrow, called reactants, to the species on the right-hand side of the arrow, called products:
reactants -> products

Consider a chemical reaction between hydrogen gas and iodine gas to form hydrogen iodine:
$$\text{H}_2 + \text{I}_2 \leftrightarrow 2\text{HI}$$

We can formulate the differential equations for the whole reaction system as below.

$$\frac{d}{dt} [\text{H}_2] = k_2 \cdot [\text{HI}^2] - k_1 \cdot [\text{H}_2] \cdot [\text{I}_2]$$
$$\frac{d}{dt} [\text{I}_2] = k_2 \cdot [\text{HI}^2] - k_1 \cdot [\text{H}_2] \cdot [\text{I}_2]$$
$$\frac{d}{dt} [\text{HI}] = 2k_2 \cdot [\text{H}_2] \cdot [\text{I}_2] - 2k_1 \cdot [\text{HI}^2]$$

Below the equations, the LaTeX source code is visible:



```
\documentclass[12pt]{article}
\begin{document}
\thispagestyle{empty}
\[\frac{\mathrm{d}}{\mathrm{d}t}\mathrm{[H_2]}=k_{2}\cdot\mathrm{[HI^2]}-k_{1}\cdot\mathrm{[H_2]}\cdot\mathrm{[I_2]}\]
\[\frac{\mathrm{d}}{\mathrm{d}t}\mathrm{[I_2]}=k_{2}\cdot\mathrm{[HI^2]}-k_{1}\cdot\mathrm{[H_2]}\cdot\mathrm{[I_2]}\]
\[\frac{\mathrm{d}}{\mathrm{d}t}\mathrm{[HI]}=2k_{2}\cdot\mathrm{[H_2]}\cdot\mathrm{[I_2]}-2k_{1}\cdot\mathrm{[HI^2]}\]
\end{document}
```

The status bar at the bottom right of the window shows "Ready".

Contents in
OMWebbook
Generated from
OMNotebook


Latex instructions
can be hidden by
double clicking the
Cell in tree view

OpenModelica Environment Demo

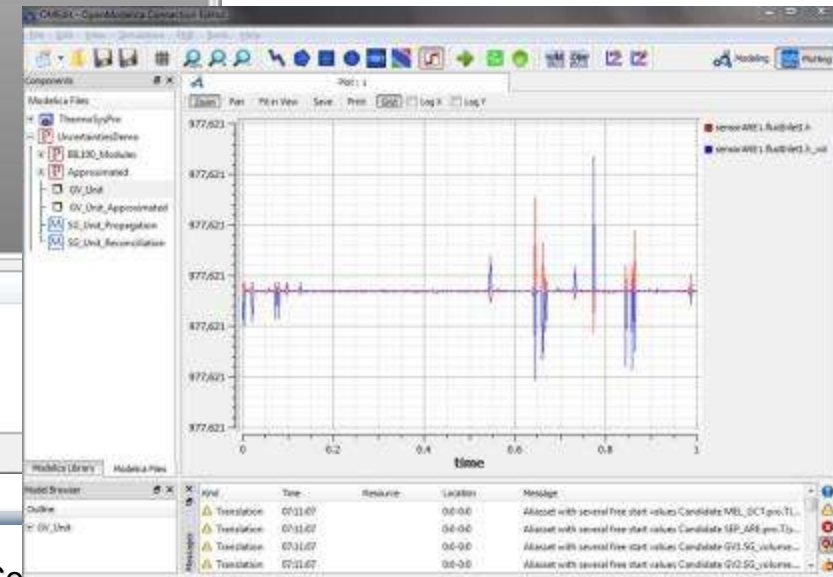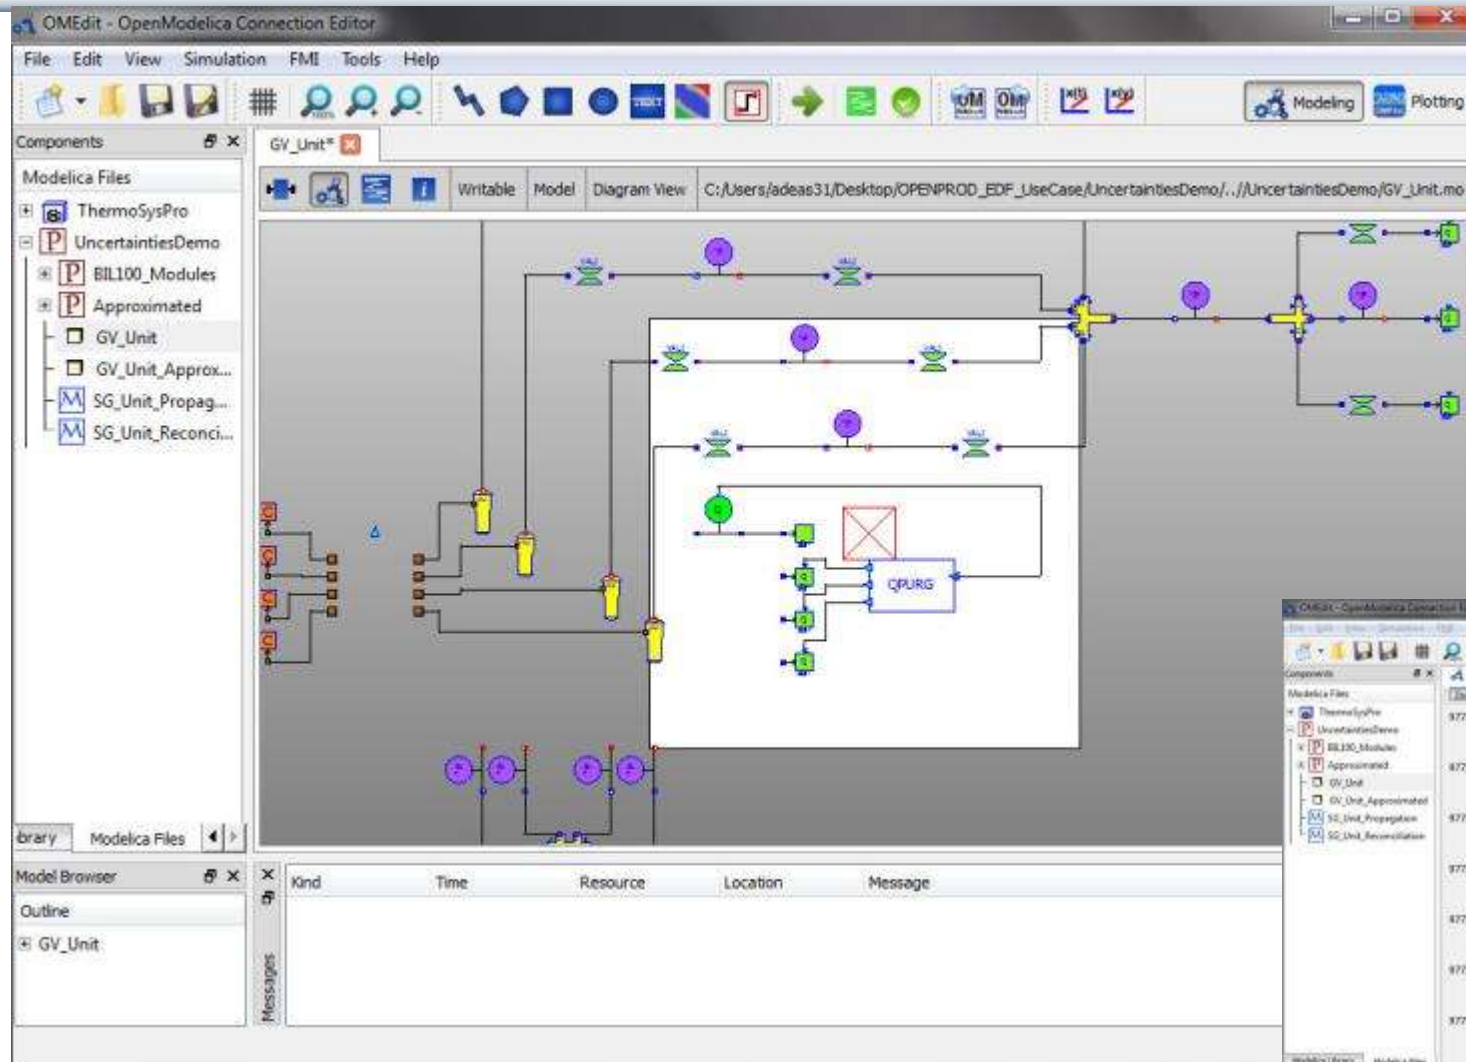

OpenModelica MDT – Eclipse Plugin

- Browsing of packages, classes, functions
- Automatic building of executables; separate compilation
- Syntax highlighting
- Code completion, Code query support for developers
- Automatic Indentation
- Debugger (Prel. version for algorithmic subset)

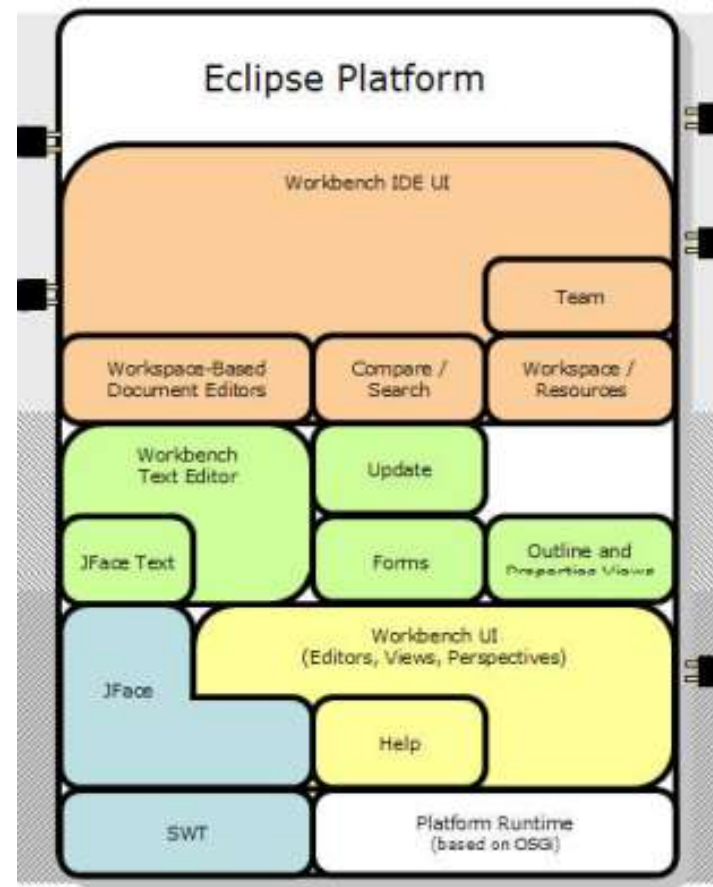

OpenModelica MDT: Code Outline and Hovering Info

The screenshot displays the Eclipse IDE interface for the OpenModelica MDT. The top-left pane shows a project tree with various files like 'Absyn.mo', 'Algorithm.mo', and 'BuiltIn.mo'. The bottom-left pane shows a code outline for the 'Absyn' package, listing various algorithmic constructs such as 'ADD', 'ALG_ASSIGN', 'ALG_BREAK', etc. The main editor pane shows the source code of 'Absyn.mo', with a function 'getCrefFromExp' highlighted. A tooltip is visible over this function, providing its signature and description: 'function getCrefFromExp "function: getCrefFromExp Returns a flattened list of the component references in an expression"'. The bottom-right pane shows a 'Problems' window with error messages, and a 'Console' window. A large blue callout box with white text is overlaid on the right side of the IDE, pointing to the tooltip and containing the text 'Identifier Info on Hovering'. Another blue callout box with white text is overlaid on the bottom-left pane, containing the text 'Code Outline for easy navigation within Modelica files'. The status bar at the bottom indicates '64M of 254M' and 'Ctrl Contrib (Bottom)'.

Identifier Info on Hovering

Code Outline for easy navigation within Modelica files

Modelica and MetaModelica Support in Visual Studio Language server, Syntax highlighting and editing

Modelica model syntax highlighting

```
2 model LotkaVolterra "Lotka-Volterra equations"
3   Real x(start = 1) "Prey";
4   Real y(start = 1) "Predator";
5   parameter Real lambda = 0.5;
6   input Real u;
7   equation
8     der(x) = x - x * y - lambda * u;
9     der(y) = -y + x * y - u;
10  end LotkaVolterra;
```

Modelica function syntax highlighting

```
fu
mo function modelica_ons"
  Modelica function definition
  Real y(start = 1) "Predator";
  parameter Real lambda = 0.5;
  input Real u;
  equation
  der(x) = x - x * y - lambda * u;
  der(y) = -y + x * y - u;
end LotkaVolterra;
```

Provide outline of Modelica files

The screenshot shows the VS Code Explorer on the left with the Modelica file structure expanded. The main editor shows the code for the 'Continuous.mo' file, which defines a package 'Continuous' and a block 'PI'.

Goto Modelica declaration



The screenshot shows a 'Goto Declaration' popup in VS Code. The popup displays the definition of the 'BooleanInput' connector in the 'Interfaces.mo' file, including its parameters, annotations, and graphical representation.

VSCode extensions for Modelica (<https://github.com/OpenModelica/modelica-language-server>) and MetaModelica (<https://github.com/OpenModelica/metamodelica-language-server>).

Syntax highlighting <https://marketplace.visualstudio.com/items?itemName=AnHeuermann.metamodelica>

OpenModelica Simulation in Web Browser Client



MultiBody RobotR3.FullRobot

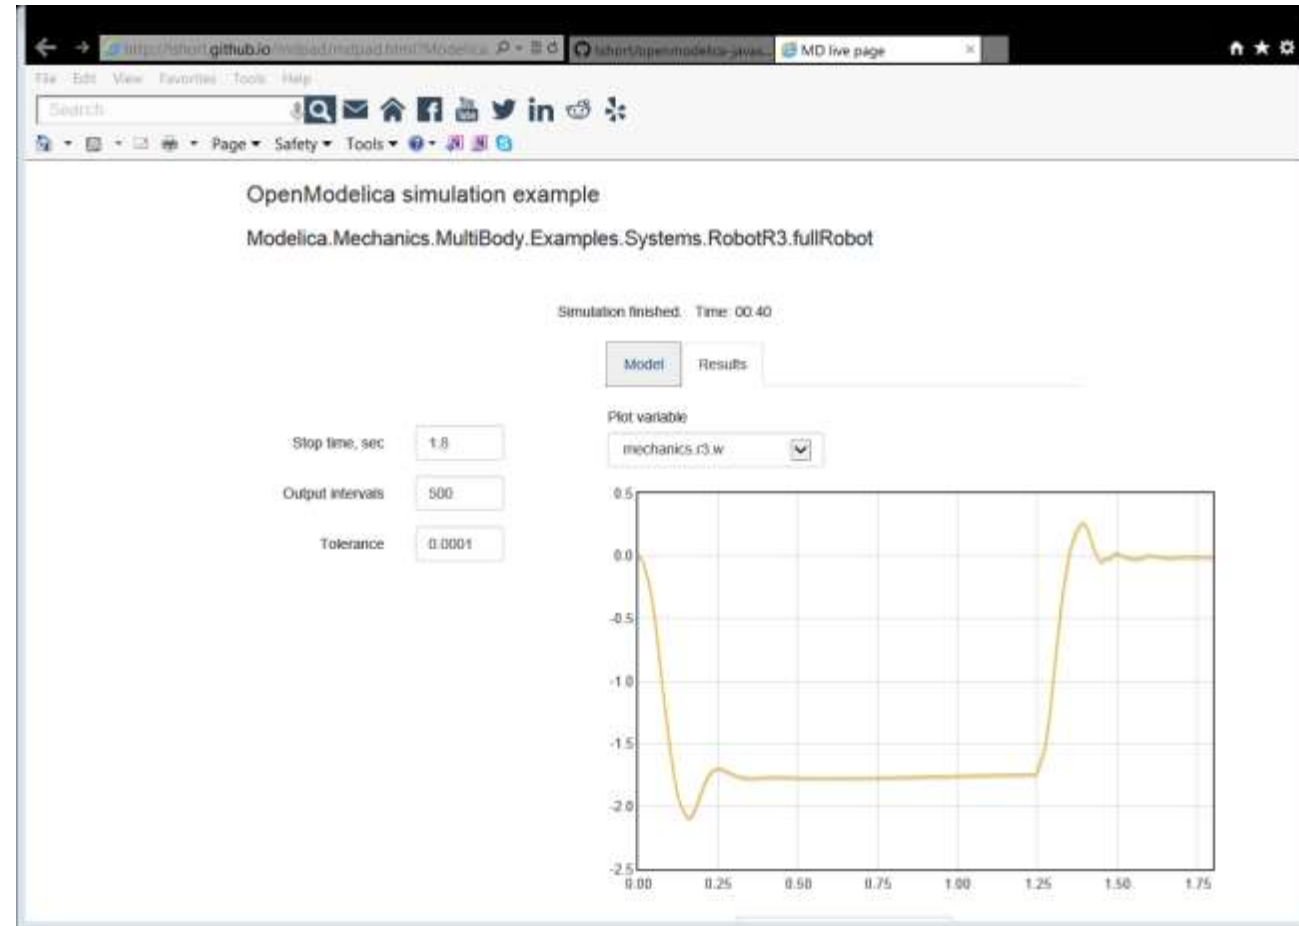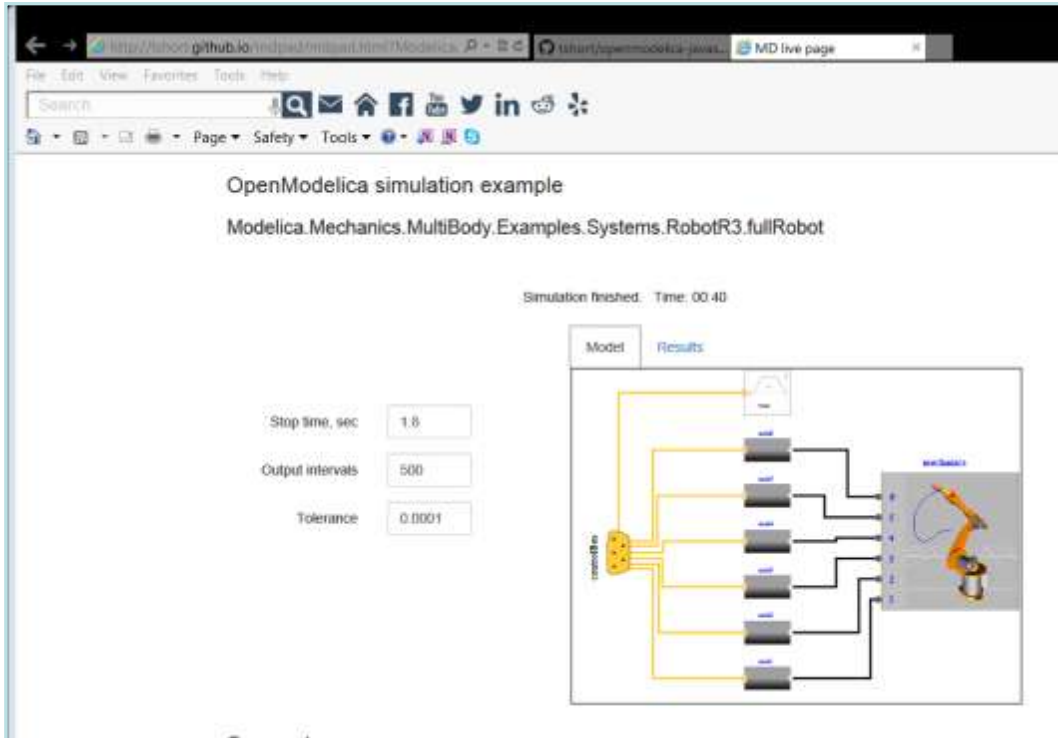

OpenModelica compiles to efficient JavaScript code which is executed in the web browser


OMPpython – Python Scripting with OpenModelica

- Interpretation of Modelica commands and expressions
- Interactive Session handling
- Library / Tool
- Optimized Parser results
- Helper functions
- Deployable, Extensible and Distributable

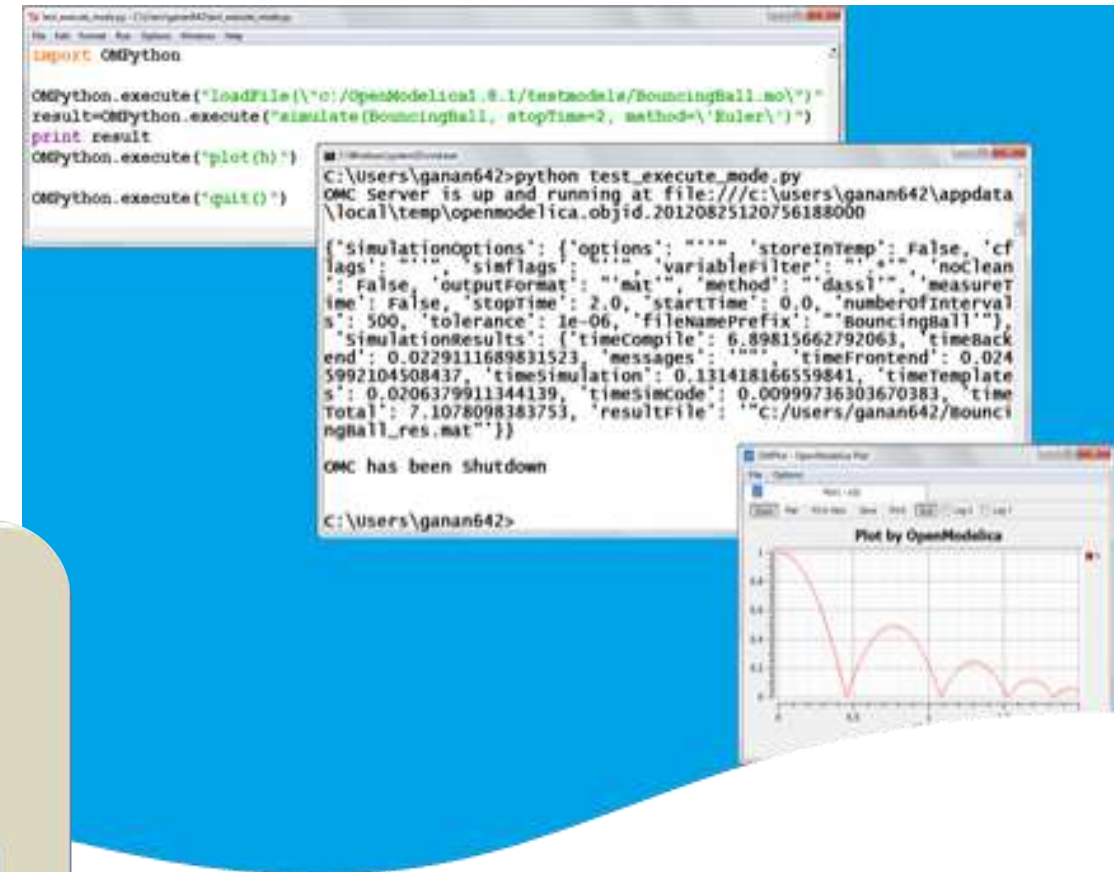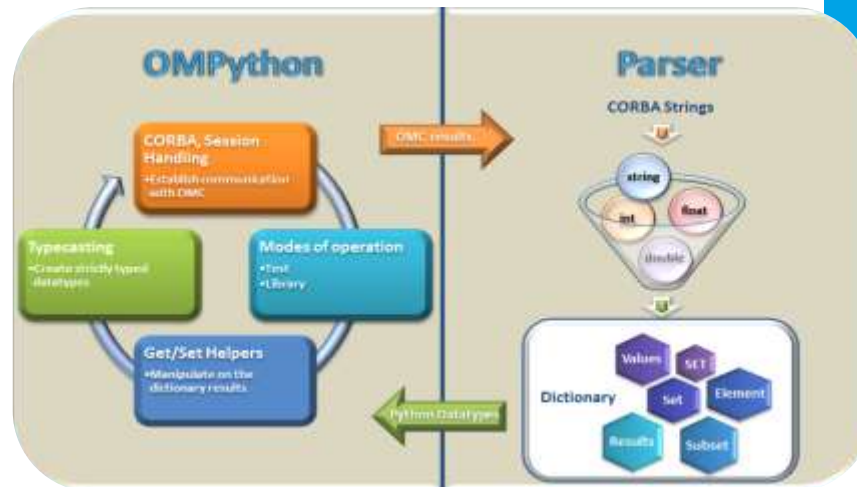

OMJulia – Julia Scripting with OpenModelica

- Interpretation of Modelica commands and expressions from Julia, transfer of data
- Control design using Julia control package together with OpenModelica
- Interactive Session handling
- Library / Tool
- Separately downloadable. be run with OpenModelica 1.13.2 or later
- Works with Jupyter notebooks

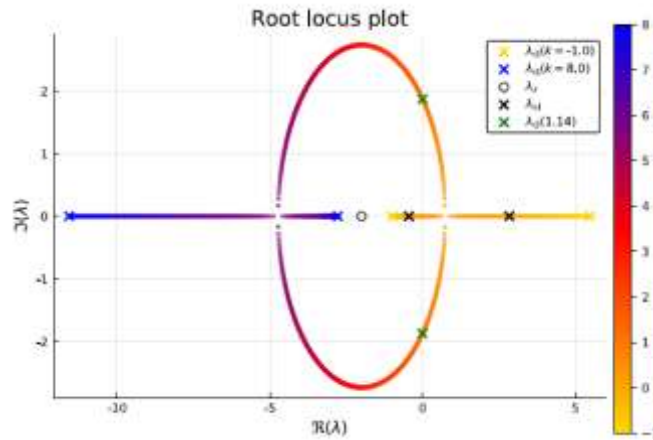

Control example with OMJulia in Jupyter notebooks

Use of Modelica + Julia in Process Systems Engineering Education

Complex models of "Seborg reactor"


Bernt Lie*, Arunkumar Palanisamy**, Peter Fritzon**

*University of South-Eastern Norway, Norway

**University of Linköping, Sweden


Introducing packages

```
In [1]: # Pkg.add("Plots") -- we assume that this step already has been carried out
using Plots; pyplot()
using LaTeXStrings
using DataFrames
using OMJulia
@using DifferentialEquations
```

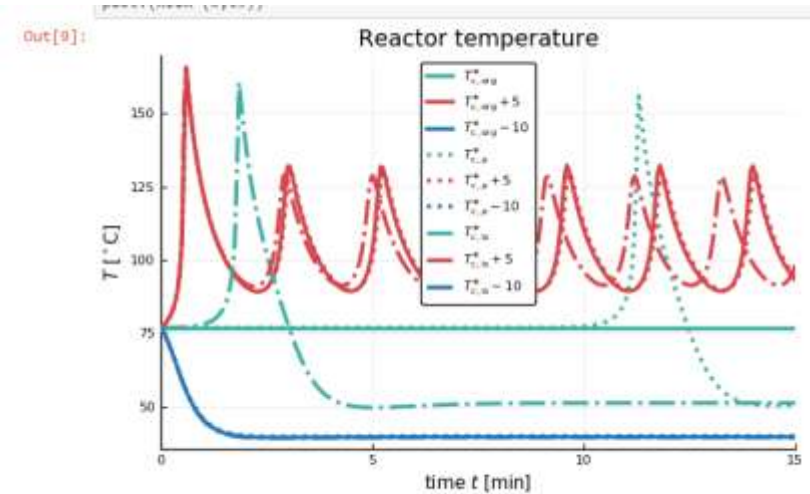


OMMatlab – Matlab Scripting with OpenModelica

- Interpretation of Modelica commands and expressions from Matlab, transfer of data
- Interactive Session handling
- Library / Tool
- Separately downloadable. be run with OpenModelica
- Similar API functions as in OMJulia and OMPython
- Can be used for control design from Matlab

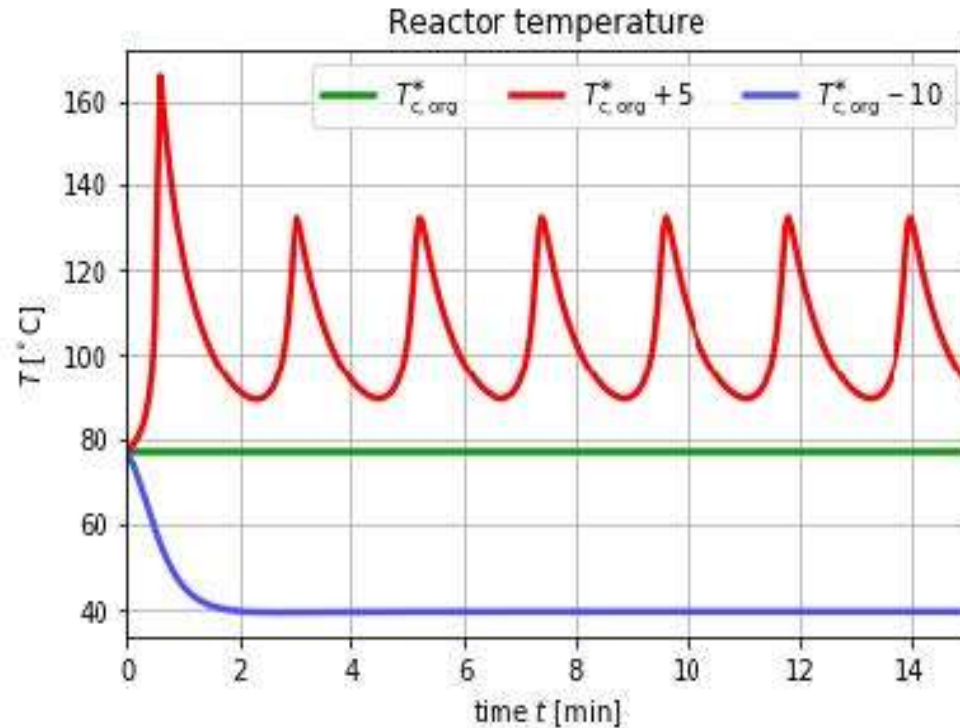





Experimental OpenModelica Environment in Julia

- **OpenModelica.jl**: A Modular and Extensible Modelica compiler framework in Julia
- **Translated the high-performance frontend.**
- **Able to execute and translate Modelica/MetaModelica functions**
- **Able to simulate discrete-hybrid systems + regular continuous systems**
- **Experimental backends developed**
 - Targeting DifferentialEquations.jl and ModelingToolkit.jl (MTK)
 - Causalization sorting, matching...
 - Integrated LightGraphs.jl package, DAG representation of the hybrid DAE
 - Integration with Sundials. IDAS used for numerical integration
 - Integrated Plots.jl for interactive plotting and animation
- Alpha is released, a Beta Release on the way
 - **MSL support (New 2022/2023)**
- Supporting Experimental Modelica Features:
 - **Language extensions for variable-structure system support (2022)**
 - **Dynamic Overconstrained Connectors (2022)**
 - **Theta Operator (New 2023)**

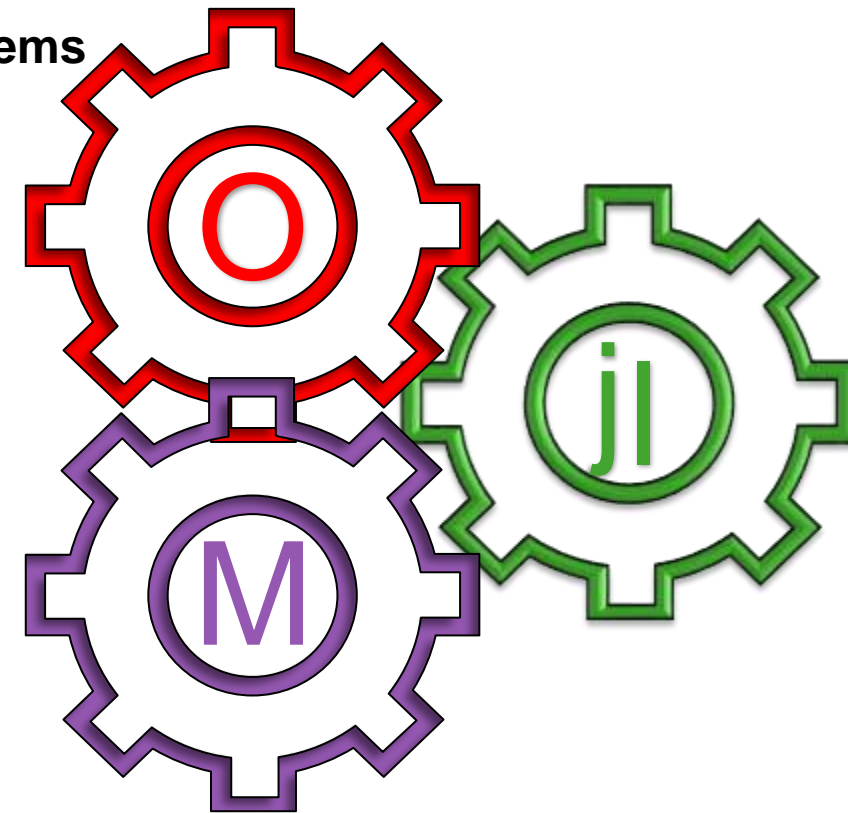


OMEdit 3D Visualization of Multi-Body Systems


- Built-in feature of OMEdit to animate MSL-Multi-Body shapes
- Visualization of simulation results
- Animation of geometric primitives and CAD-Files

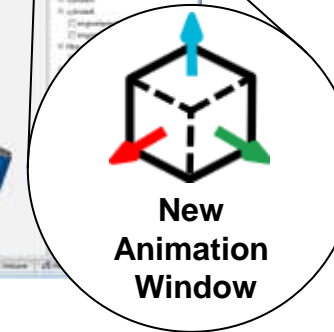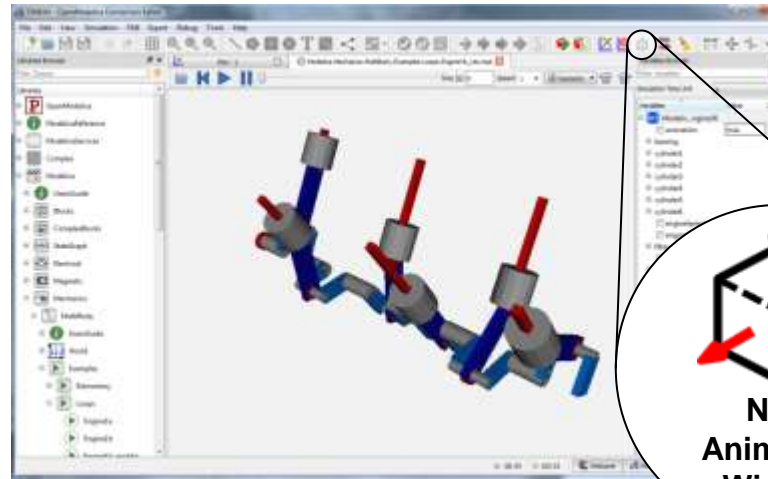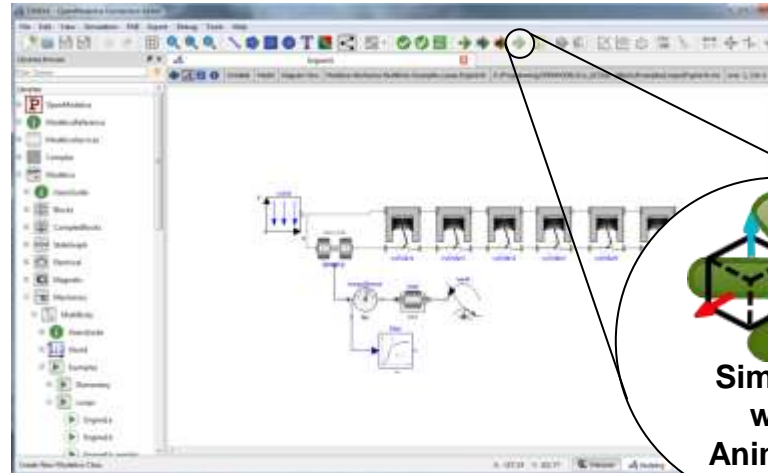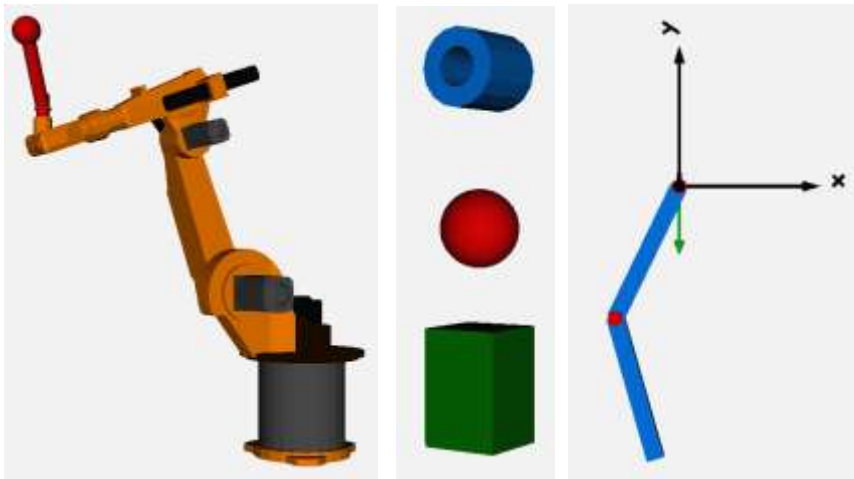

OpenModelica 3D Animation Demo (V6Engine and Excavator)

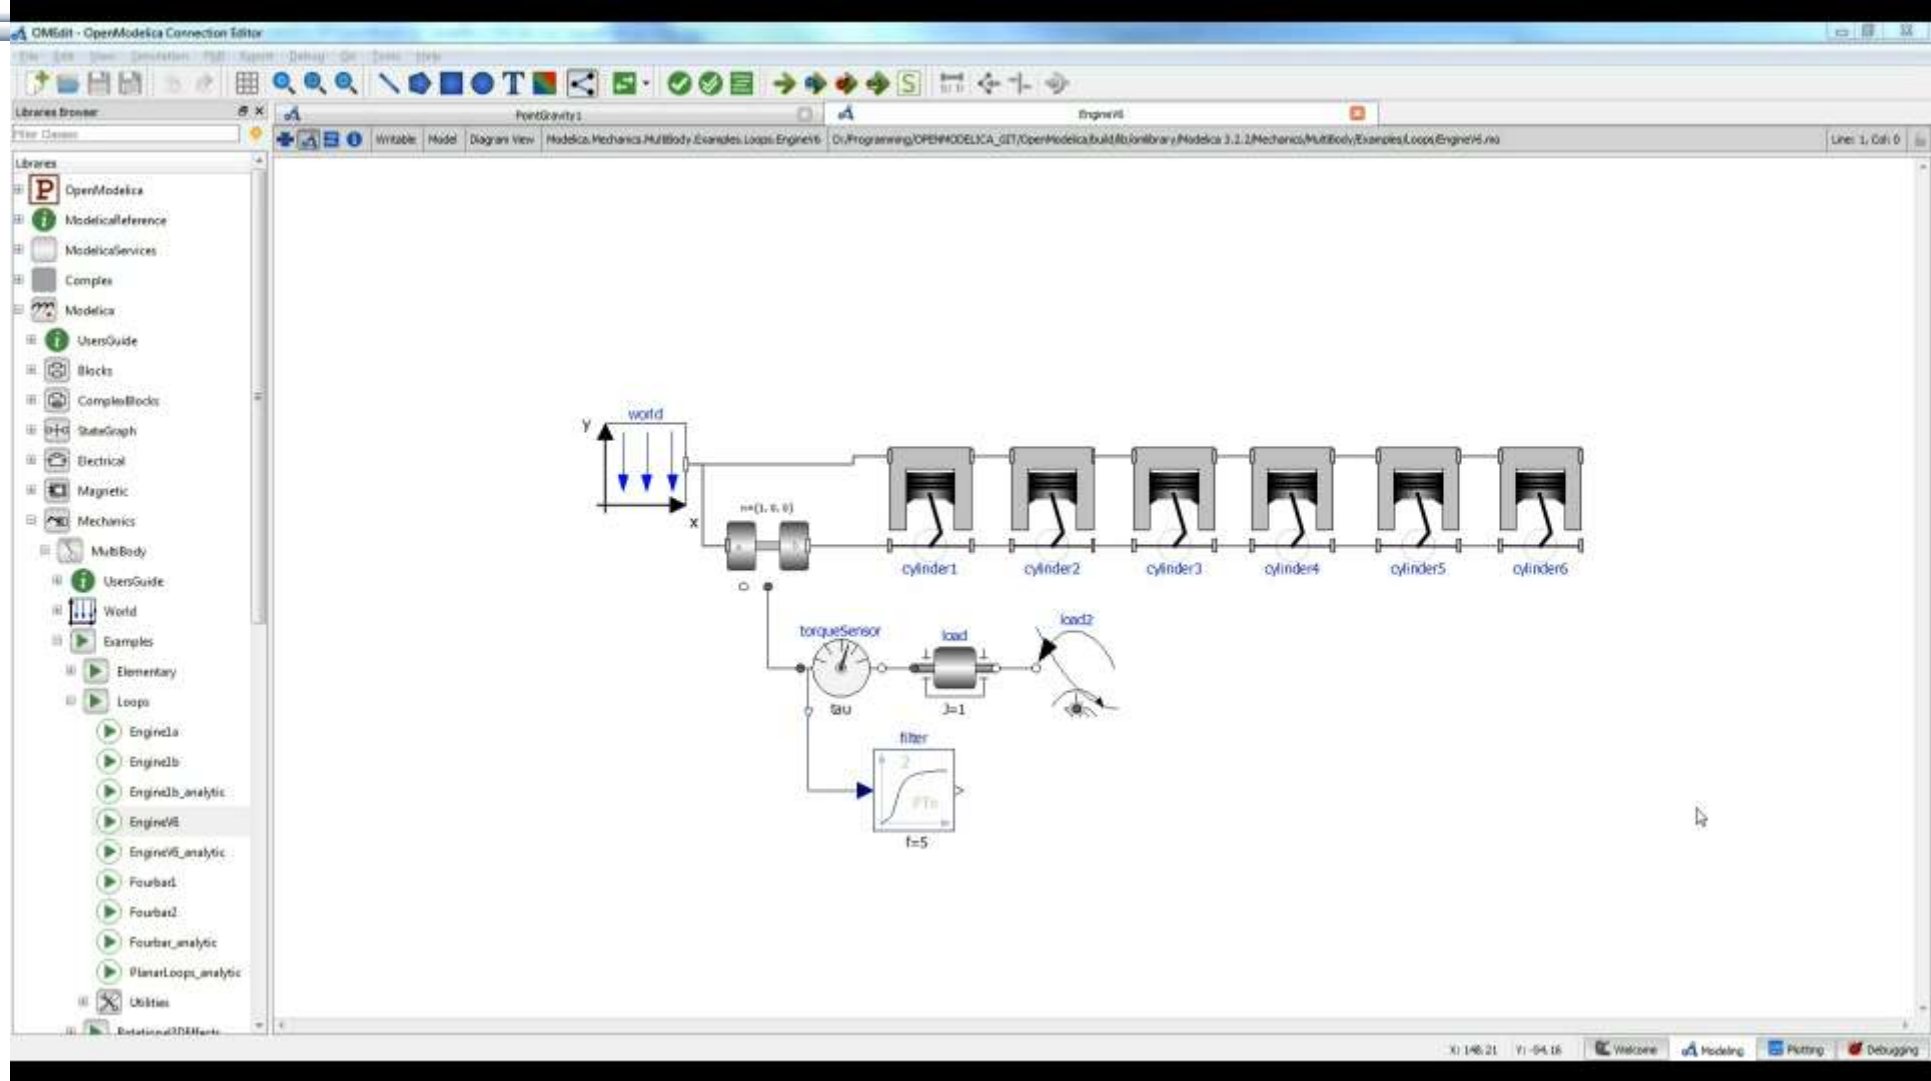


OpenModelica 3D Animation – Excavator

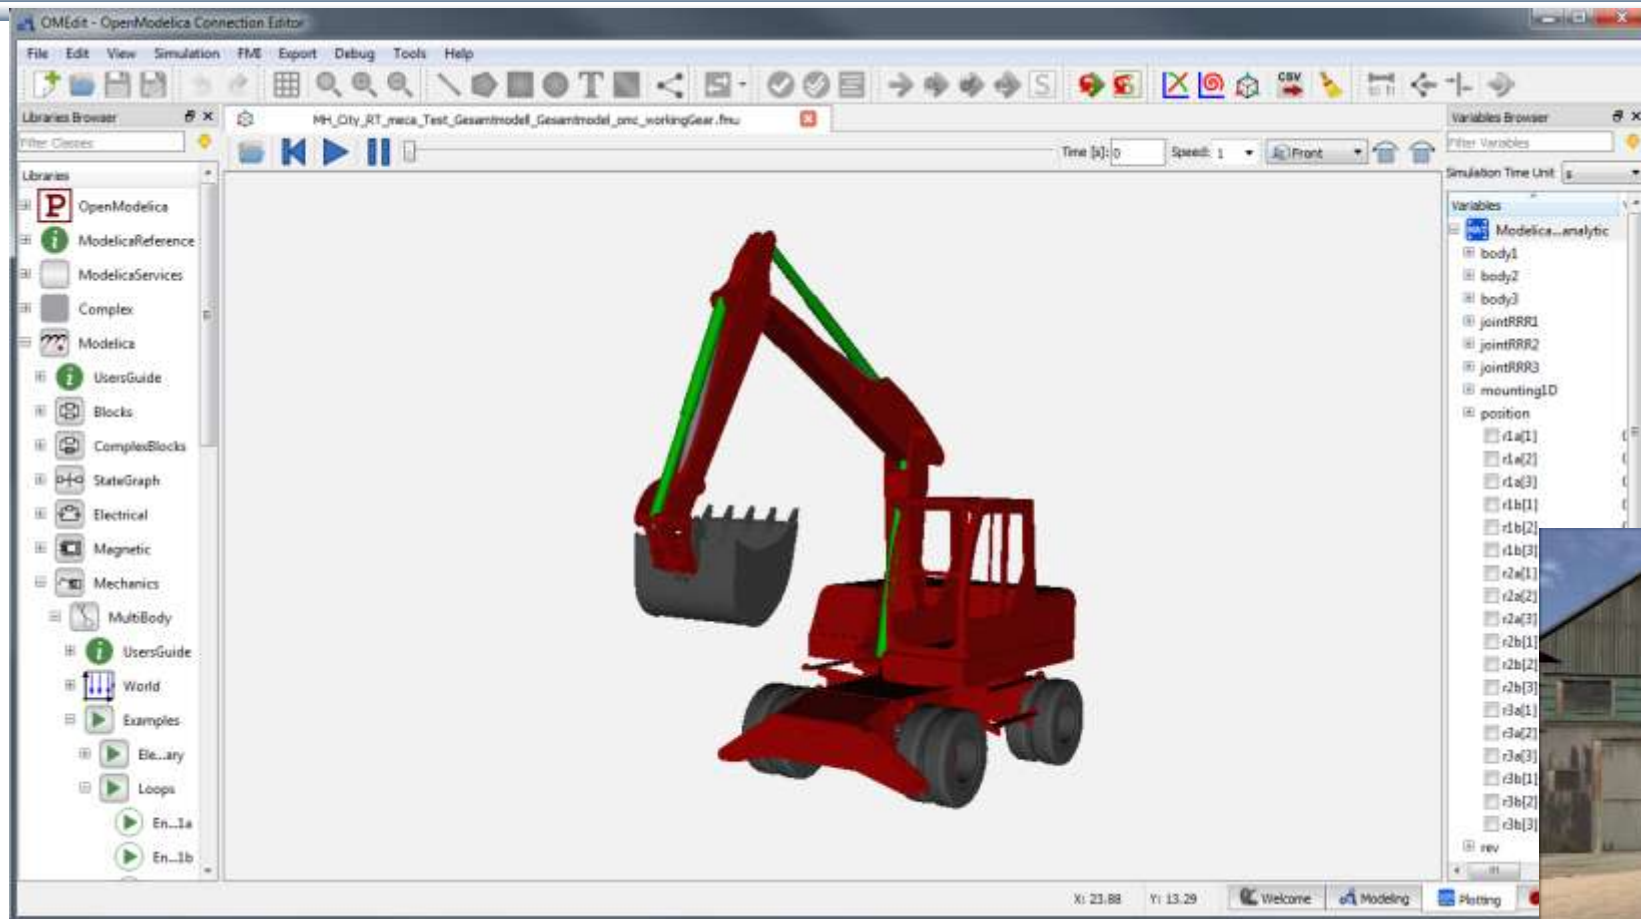

Connection with Unity


Courtesy of Volker Waurich - TU Dresden

OpenModelica 3D Animation – WheelLoader

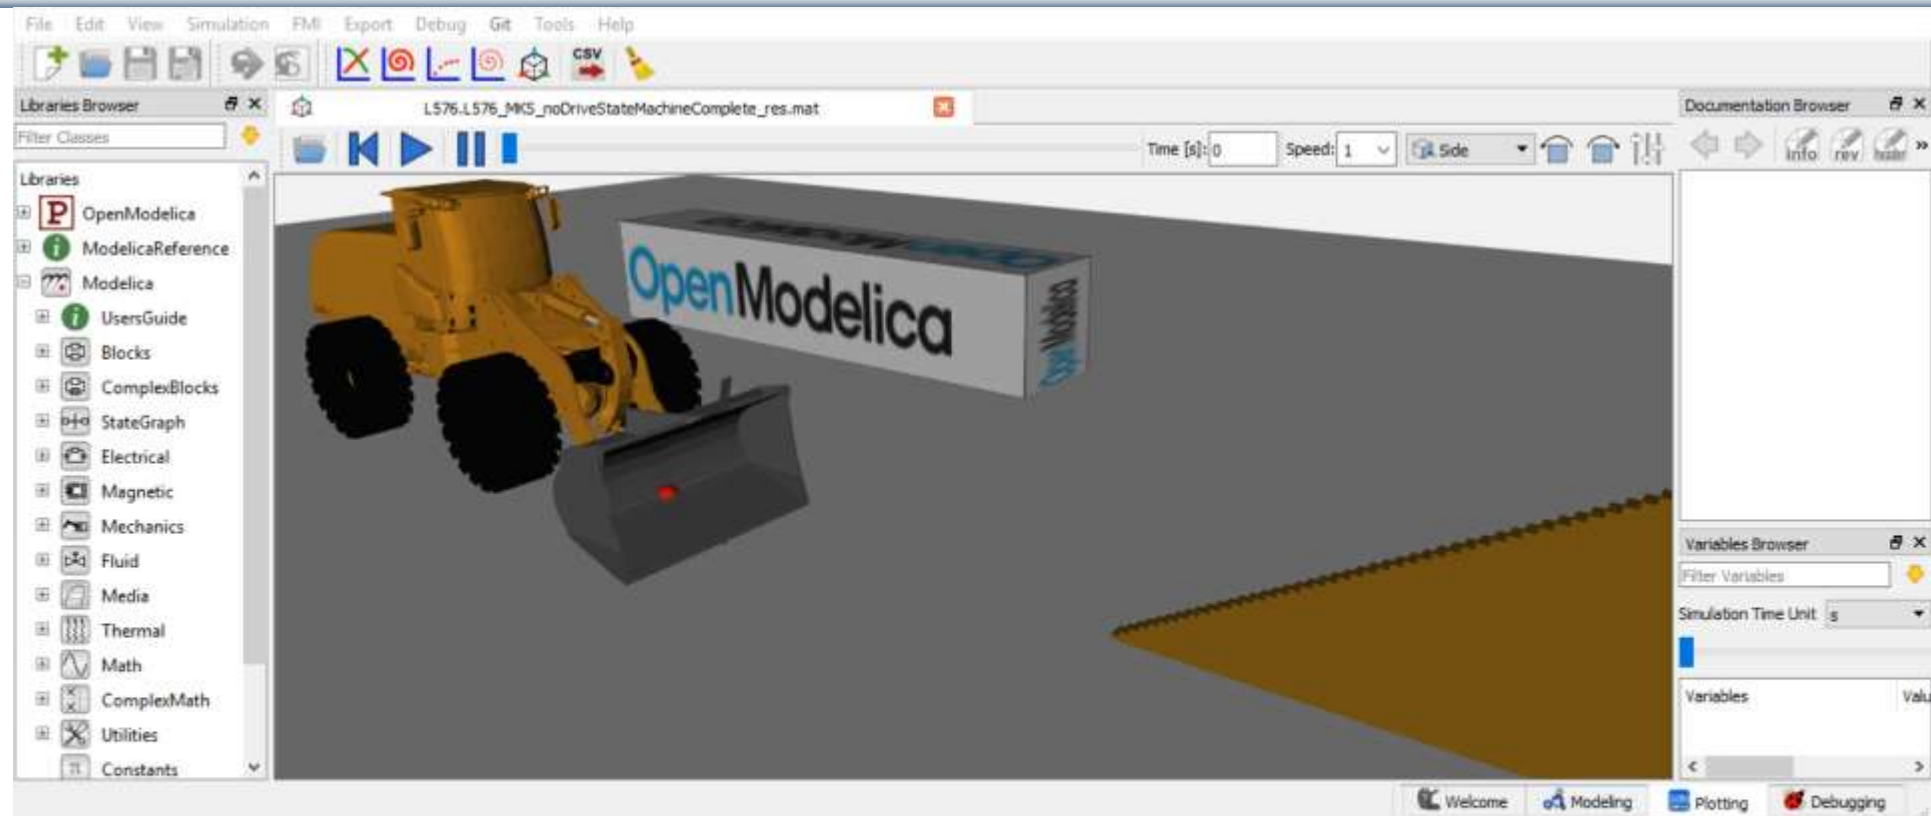

Courtesy of Volker Waurich - TU Dresden

OpenModelica 3D Animation – BouncingBall

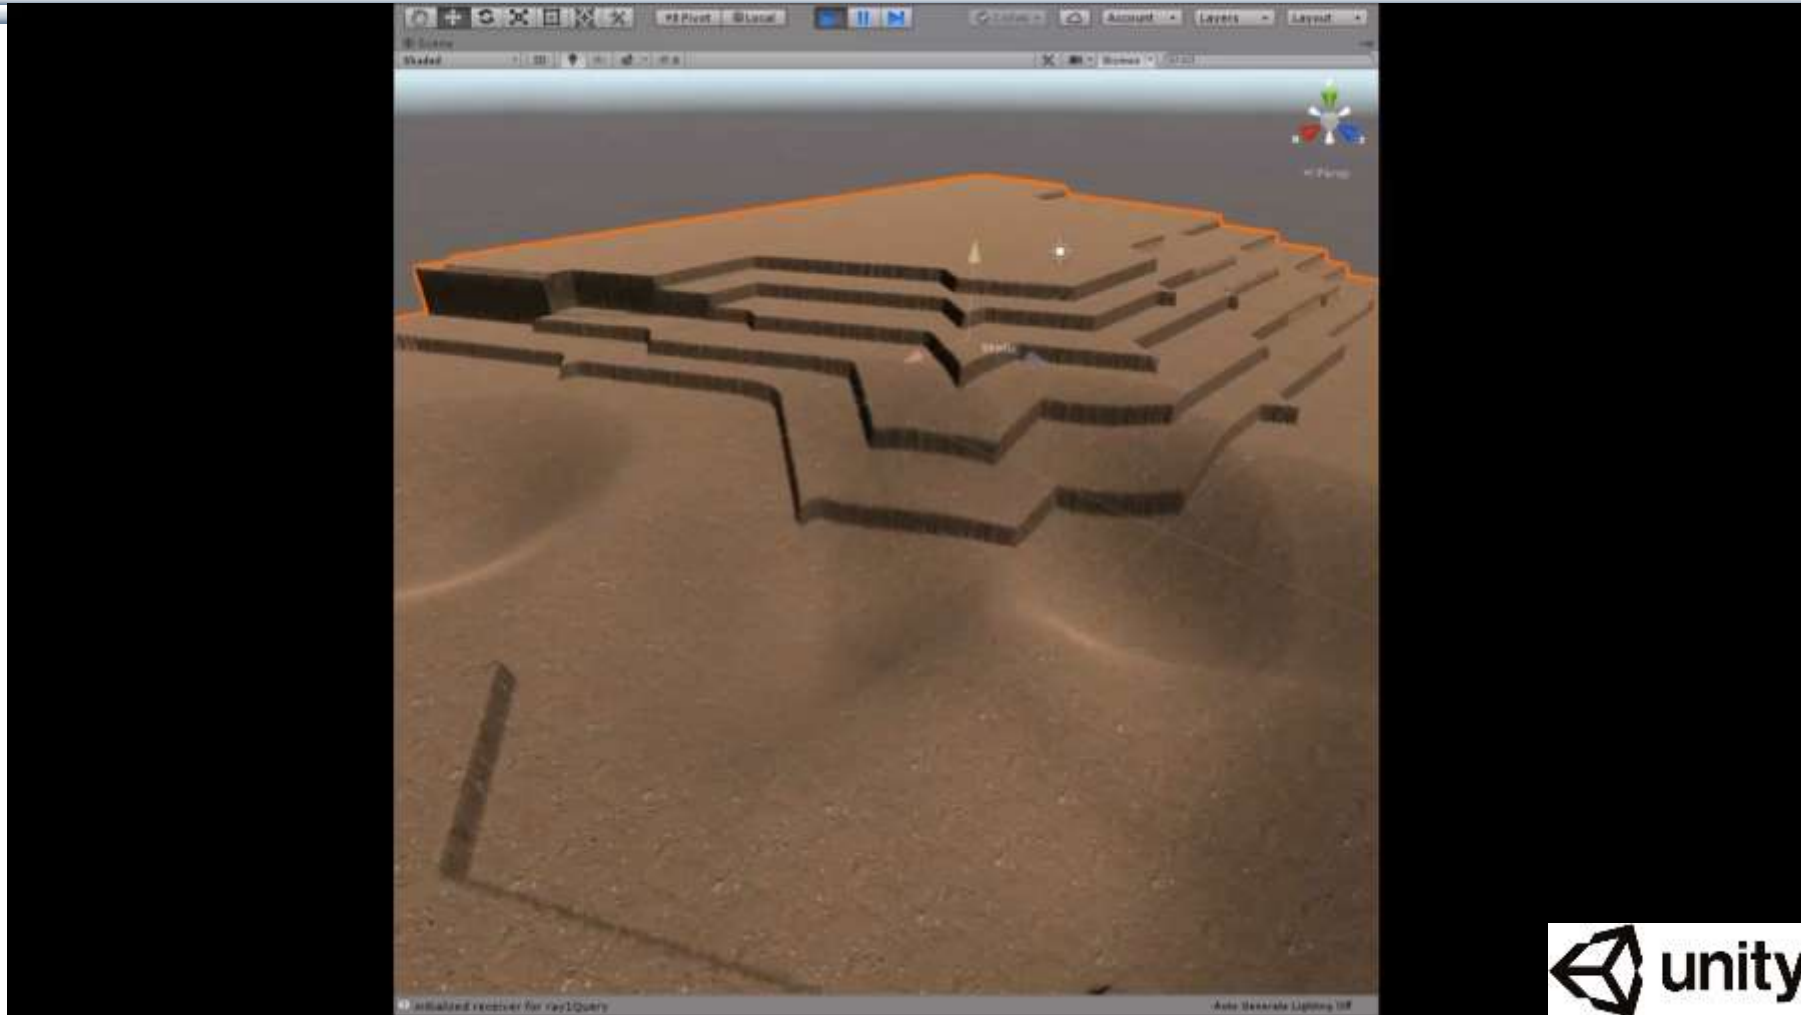


Collision detection in Unity

Courtesy of Volker Waurich - TU Dresden

Visualization using Third-Party Libraries: DLR Visualization Library



- Advanced, model-integrated and vendor-unspecific visualization tool for Modelica models
- Offline, online and real-time animation
- Video-export function
- Commercial library, feature reduced free Community Edition exists

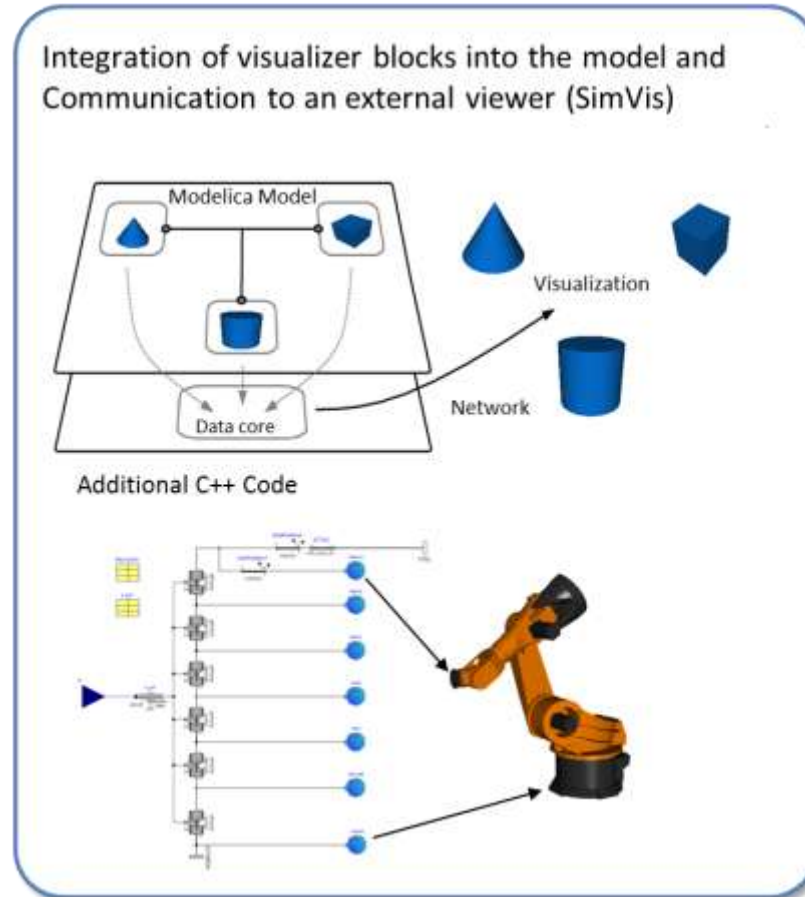

Courtesy of Dr. Tobias Bellmann (DLR)



Exercise 1.2: Use 3D Visualization for Robot model

- Open the Modelica.Mechanics.MultiBody.Examples.Systems.RobotR3.fullRobot example in OMEdit
- Press Simulate with Animation
- Replay the animation
- Compare with the plot

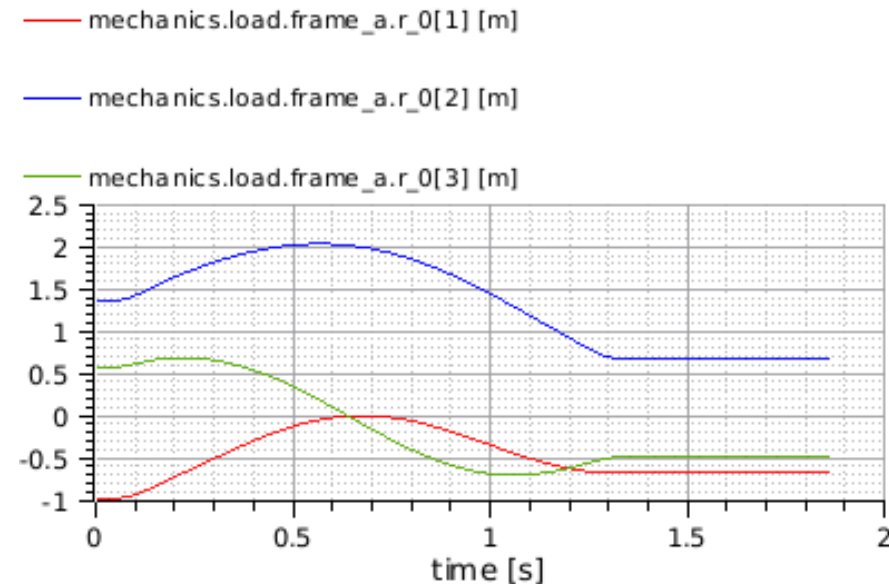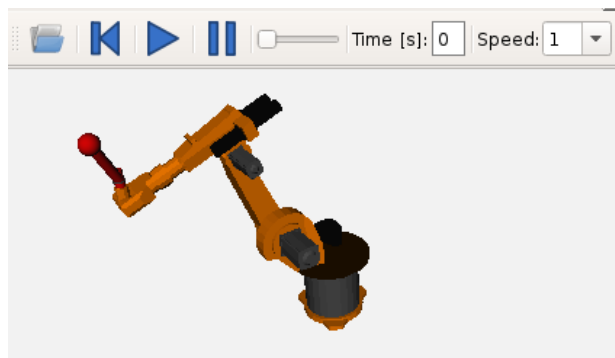

Exercise 1.3: Visualization using the DLR Visualization Community Edition (1)



- Unpack VisualizationCommunityEdition.zip
- Open the library in OMEdit
- Simulate the EMotor example
- The DLR SimVis visualization app should start automatically
- Export the animation (File→Export Replay as Video)

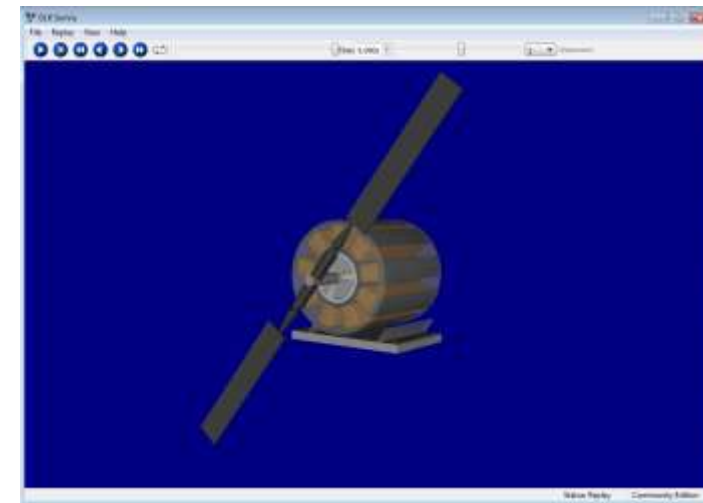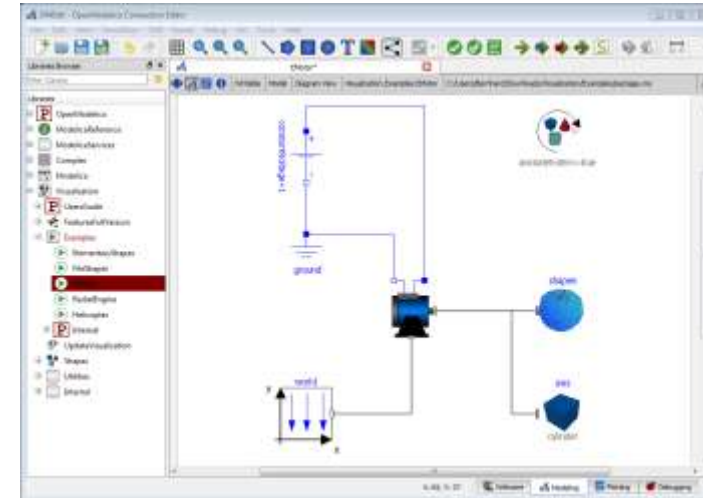

Extending Modelica with PDEs for 2D, 3D flow problems – Research


```
class PDEModel
  HeatNeumann h_iso;
  Dirichlet h_heated(g=50);
  HeatRobin h_glass(h_heat=30000);
  HeatTransfer ht;
  Rectangle2D dom;
equation
  dom.eq=ht;
  dom.left.bc=h_glass;
  dom.top.bc=h_iso;
  dom.right.bc=h_iso;
  dom.bottom.bc=h_heated;
end PDEModel;
```

Prototype in OpenModelica 2005
PhD Thesis by Levon Saldamli
www.openmodelica.org
Currently not operational

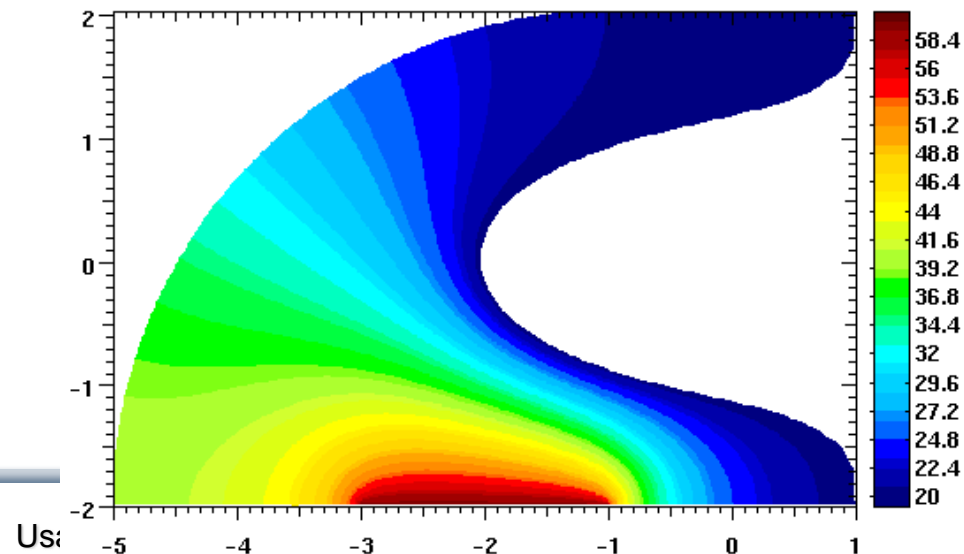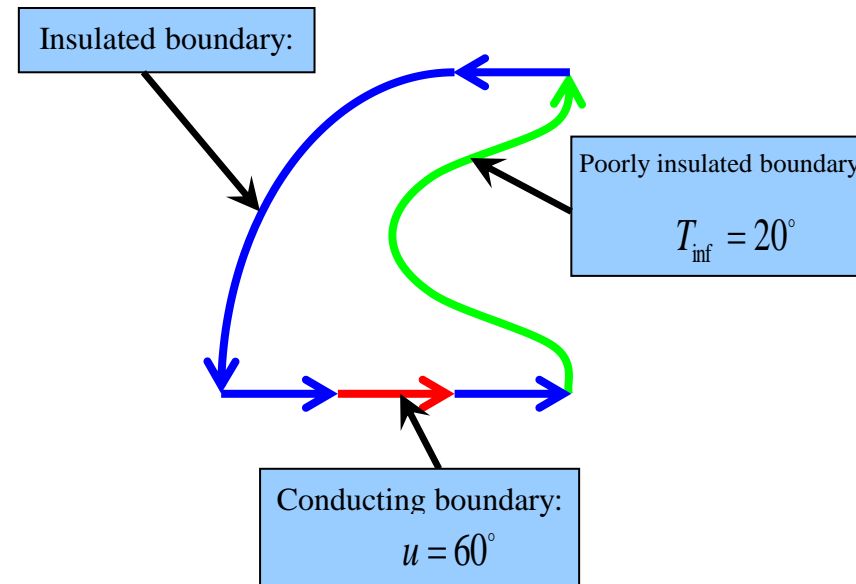

Failure Mode and Effects Analysis (FMEA) in OpenModelica


- Modelica models augmented with reliability properties can be used to generate reliability models in Figaro, which in turn can be used for static reliability analysis
- Prototype in OpenModelica integrated with Figaro tool.

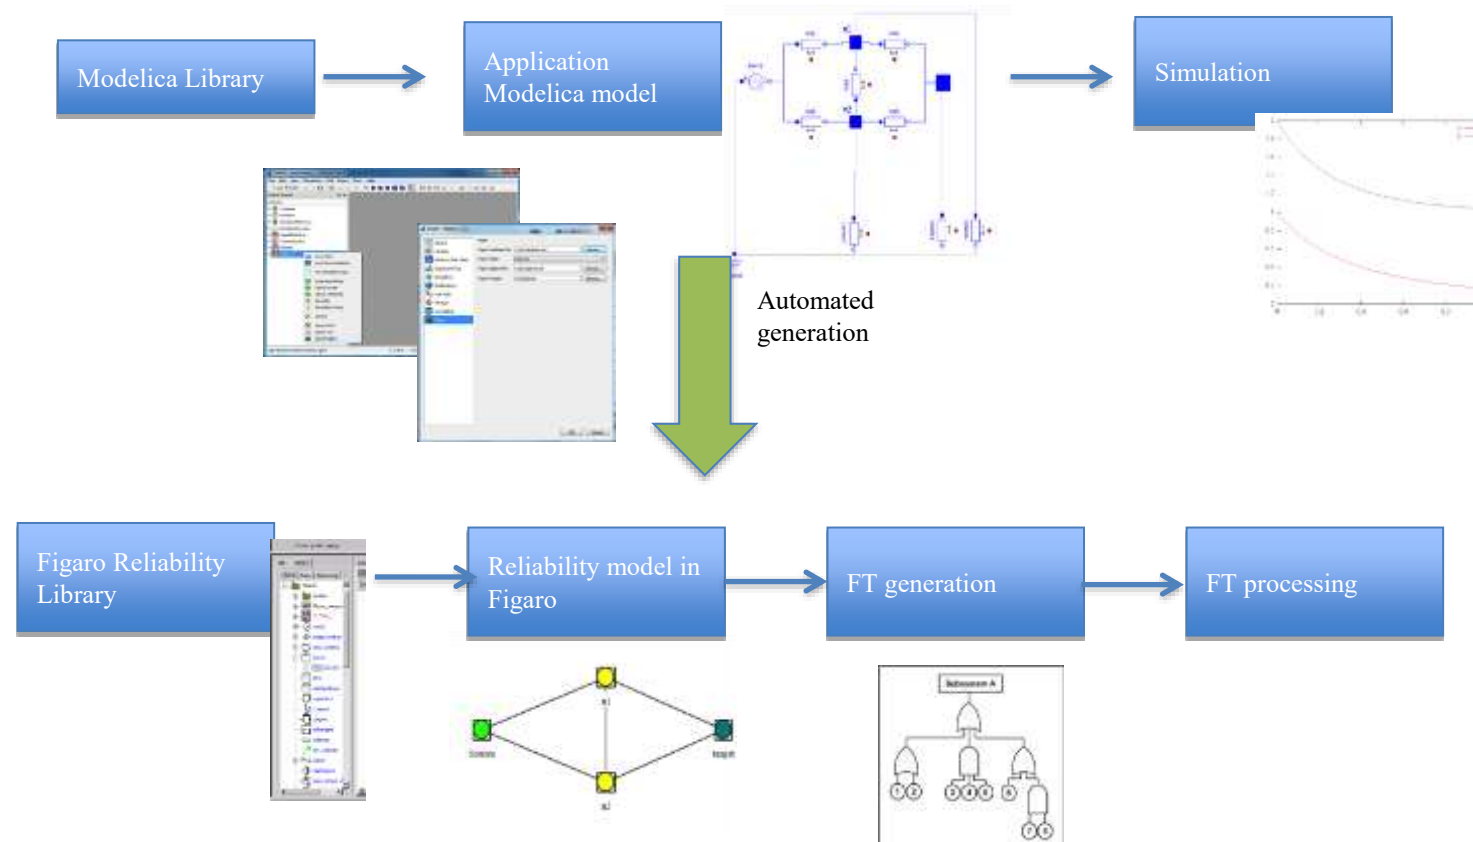

Multiple-Shooting and Collocation Dynamic Trajectory Optimization


- Minimize a goal function subject to model equation constraints, useful e.g. for NMPC
- Multiple Shooting/Collocation
 - Solve sub-problem in each sub-interval

$$x_i(t_{i+1}) = h_i + \int_{t_i}^{t_{i+1}} f(x_i(t), u(t), t) dt \approx F(t_i, t_{i+1}, h_i, u_i), \quad x_i(t_i) = h_i$$

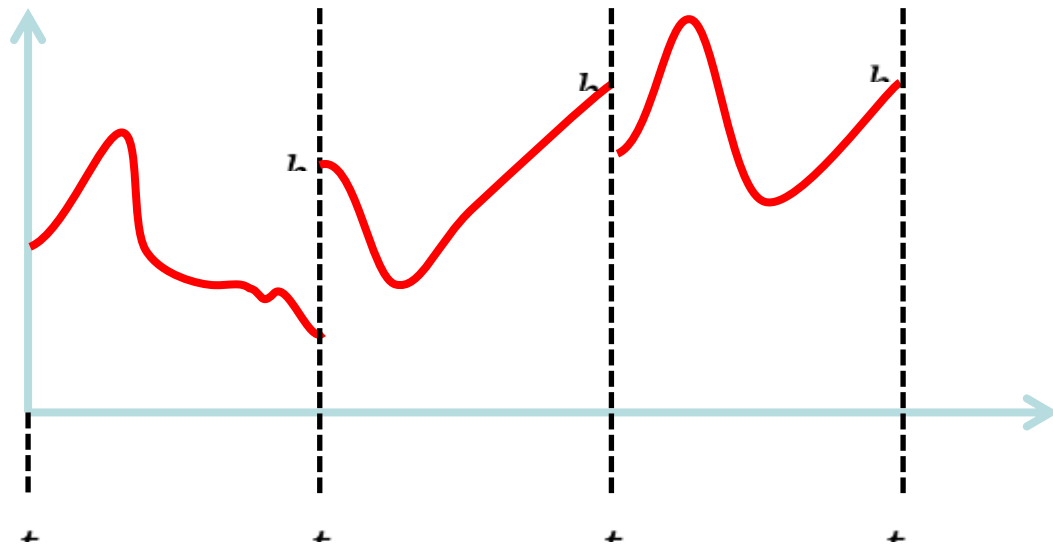


Example speedup, 16 cores:

MULTIPLE_COLLOCATION

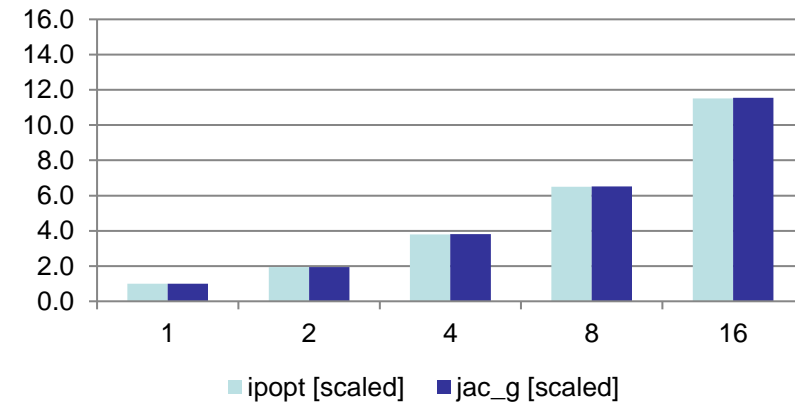

OpenModelica Dynamic Optimization Collocation

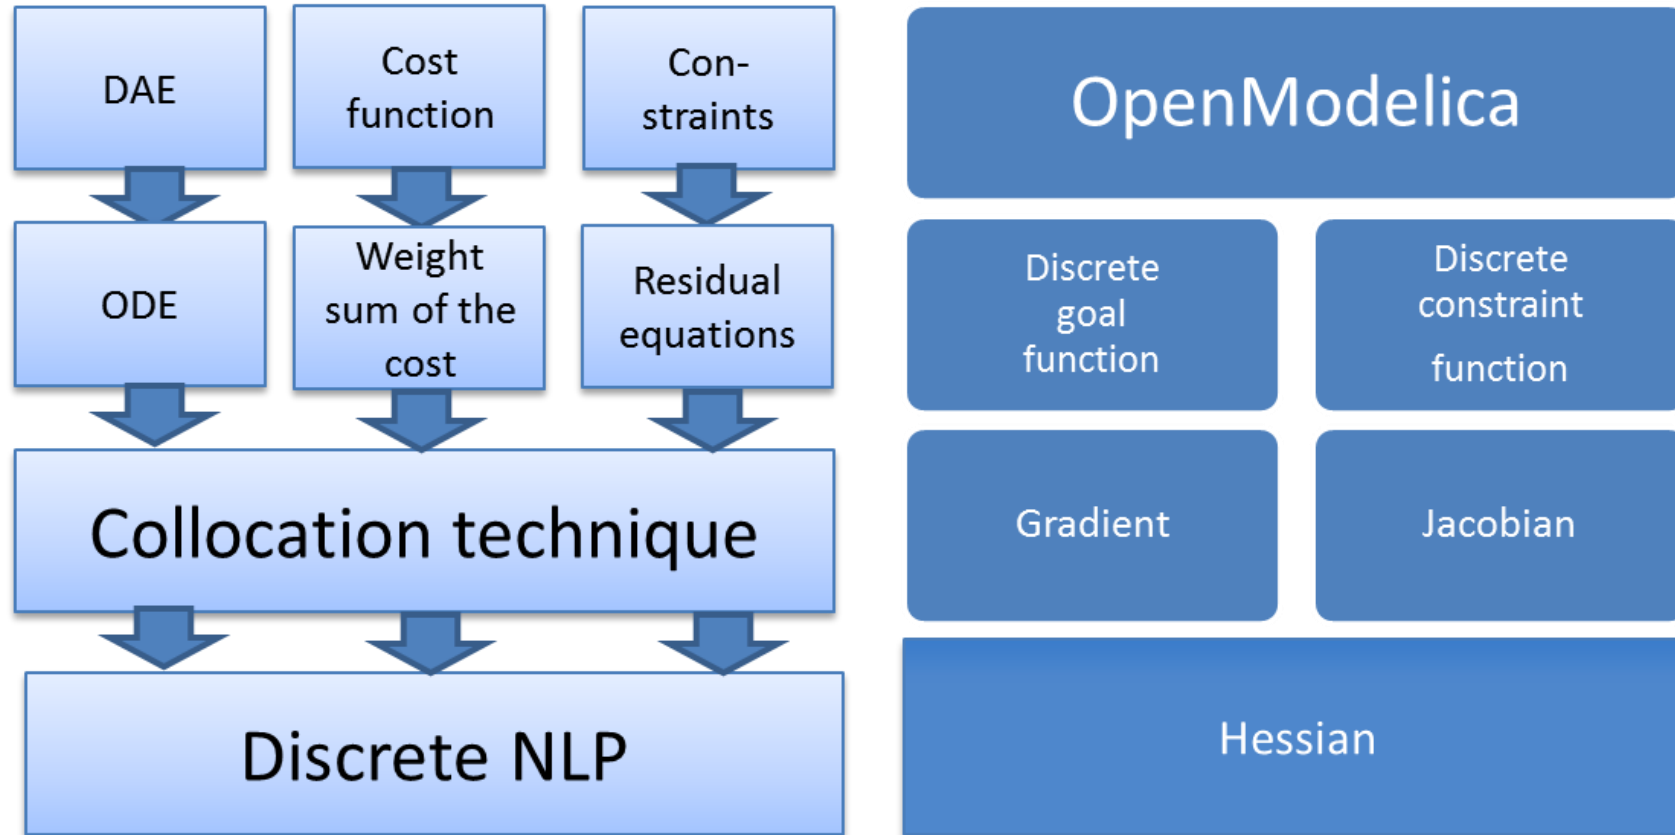


OMSens – Multi-Parameter Sensitivity Analysis


- Individual and simultaneous multi-parameter analysis
- Optimization-based simultaneous analysis
- Robust derivative free optimizer

For an exercise, see further in these slides

Heatmap visualization

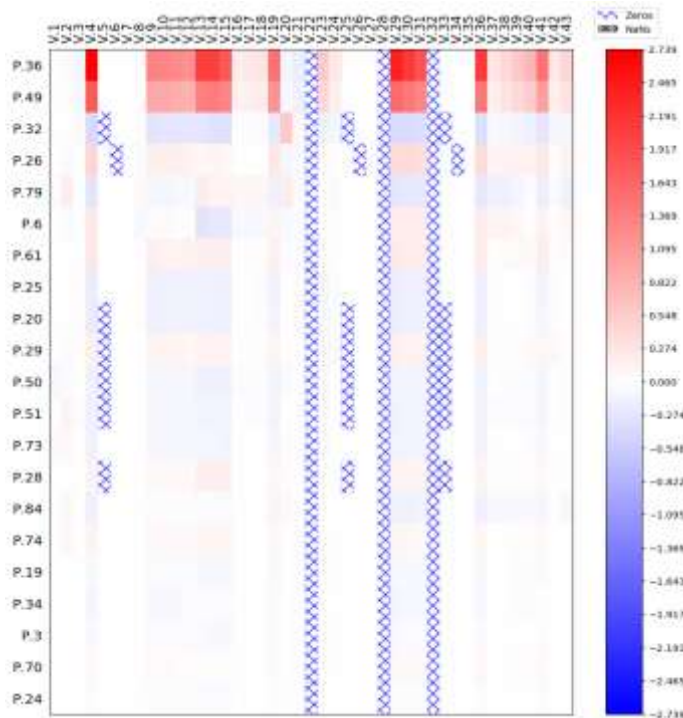


Tool architecture

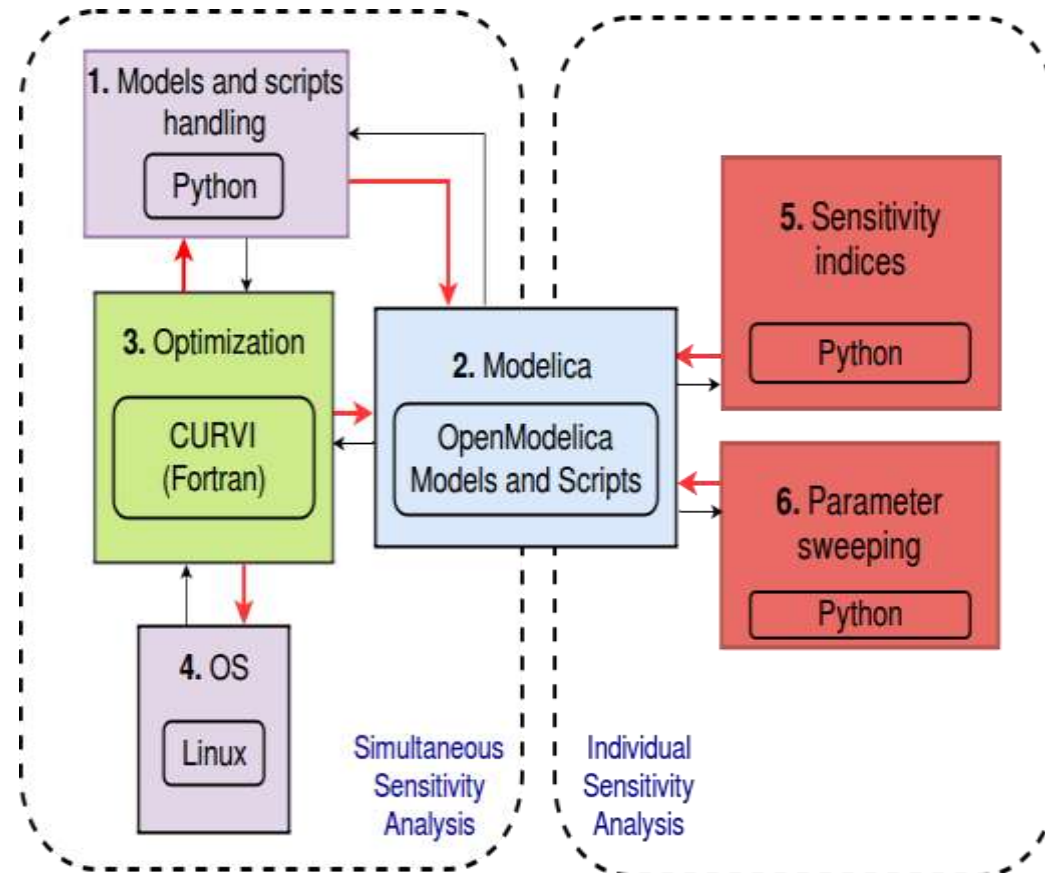

OMSysIdent – System Parameter Identification

- OMSysIdent is a module for parameter estimation of behavioral models (wrapped as FMUs) on top of the OMSimulator API.
- Identification of the parameter values is typically based on measurement data
- It uses the Ceres solver (<http://ceres-solver.org/>) for the optimization task.

General Tool Interoperability & Model Exchange Functional Mock-up Interface (FMI)

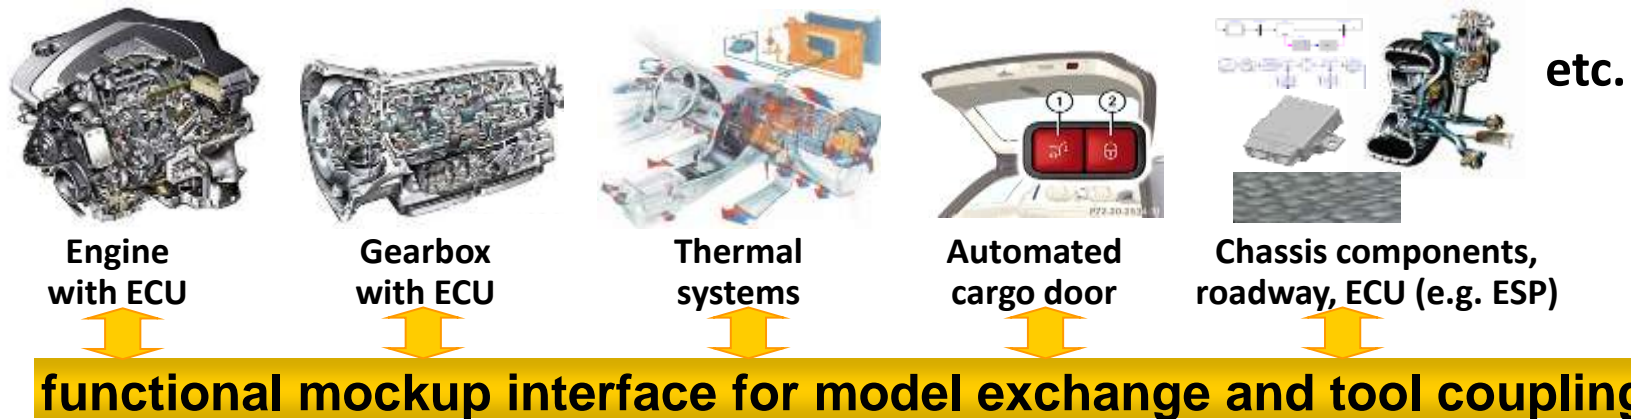

courtesy Daimler

- FMI development was started by ITEA2 MODELISAR project. FMI is now a Modelica Association Project
- **Version 1.0** FMI for Model Exchange (released Jan 26,2010)
- **Version 1.0** FMI for Co-Simulation (released Oct 12,2010)
- **Version 2.0** (released July 25 2014) **2.0.4** (released Dec 1, 2022)
- **Version 3.0** (released May 10 2022)
- **Version 3.01** (released July 10, 2023) **Version 3.02** (released Nov 27, 2024)
- FMI for Model Exchange and Co-Simulation
- ~ **180 tools** supporting it (<https://www.fmi-standard.org/tools>)

FMI 3.0 Main Improvements

- Event Mode for Co-Simulation
- Intermediate Variable Update
- Clocks
- New Types
- Array Variables
- Terminals and Icons
- FMI for Scheduled Execution
- Preparation for Layered Standards


Performance

Accuracy


New Application

Functional Mockup Units

- Import and export of input/output blocks – **Functional Mock-Up Units – FMUs**, described by
 - differential-, algebraic-, discrete equations,
 - with time-, state, and step-events
- An FMU can be large (e.g. 100 000 variables)
- An FMU can be used in an embedded system (small overhead)
- FMUs can be connected together

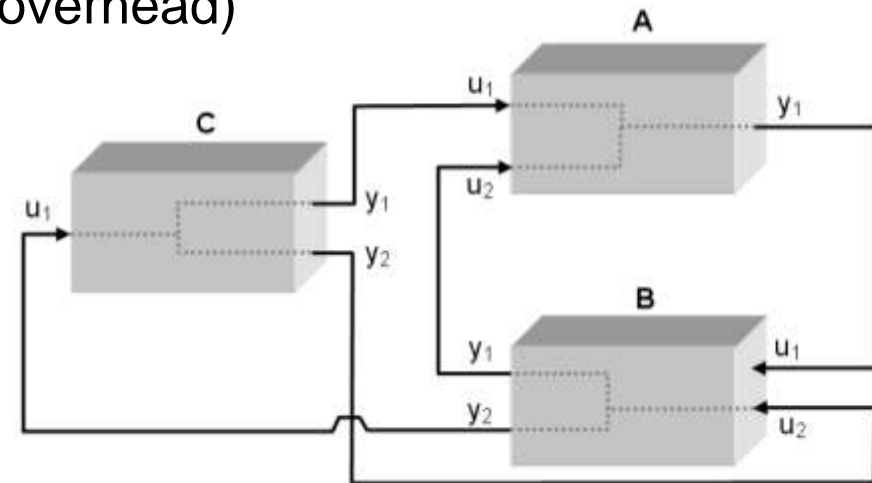

OMSimulator – Integrated FMI and TLM-based Cosimulator/Simulator – part of OpenModelica

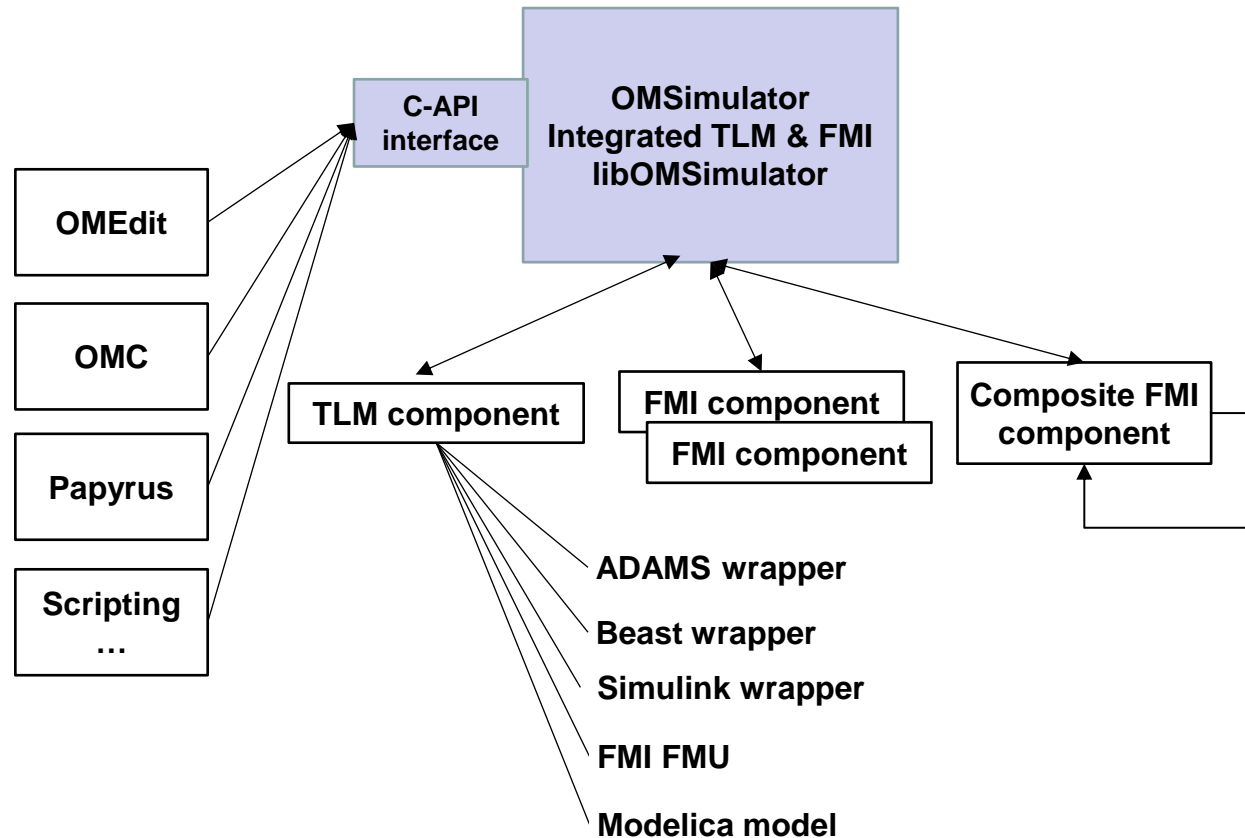

Main Framework Aspects

Unified co-simulation/simulation tool

- FMI 2.0 (model exchange and co-simulation)
- TLM (transition line modelling)
- Real-time and offline simulation

Standalone open source simulation tool with rich interfaces

- C/Java
- Scripting languages Python, Lua


Co-simulation framework as a solid base for engineering tools

- Integration into OpenModelica/Papyrus
- Open for integration into third-party tools and specialized applications (e.g. flight simulators, optimization)

OMSimulator in OpenModelica 1.18.0


- Supports both FMI and TLM
- TLM connections are optional
- Co-simulation to multiple tools
- Composite model editor
- External API interface and scripting (C, Python, Lua)

OMSimulator Composite Model Editor with 3D Viewer

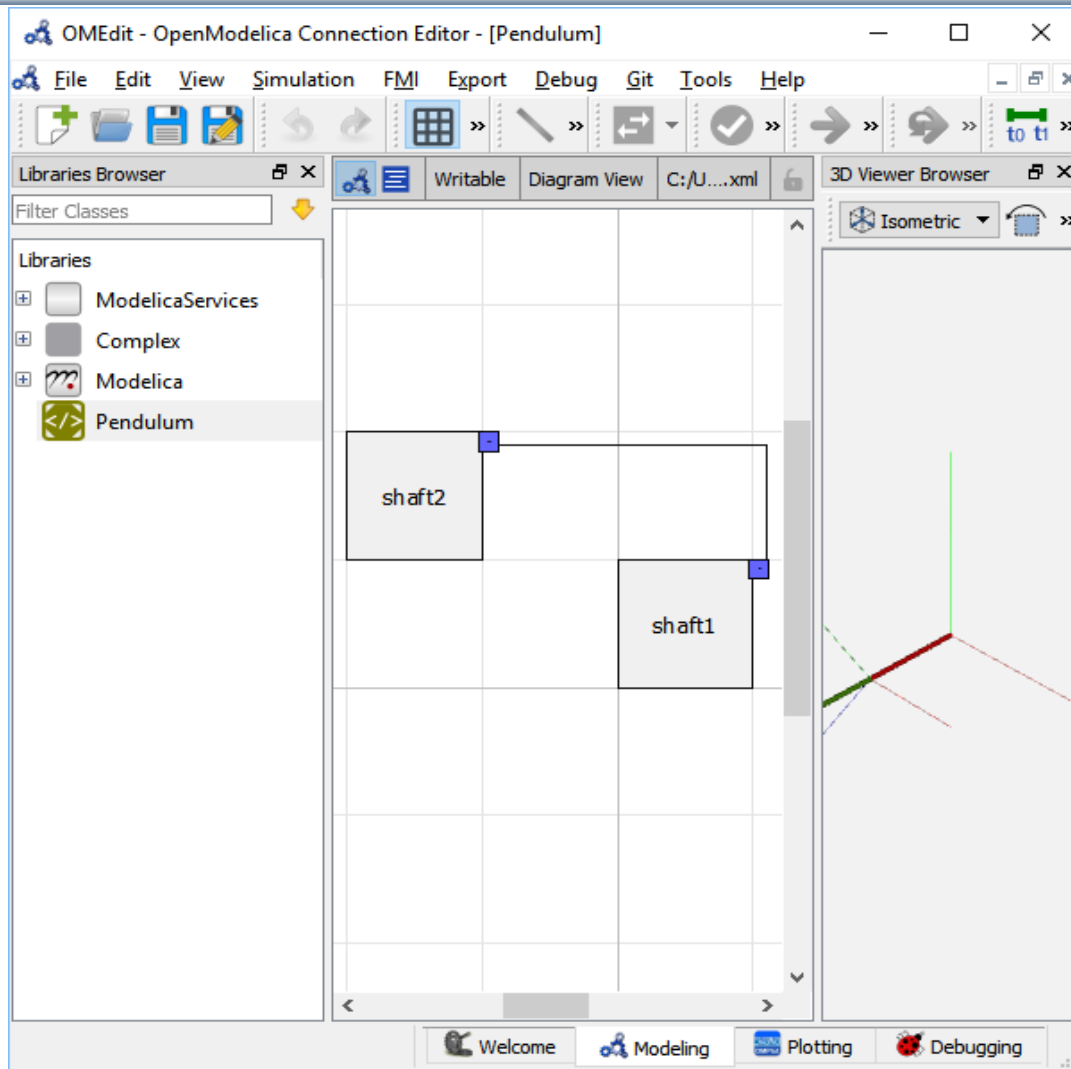


- **Composite model editor** with 3D visualization of connected mechanical model components which can be FMUs, Modelica models, etc., or co-simulated components
- **3D animation** possible (in TLM mode)
- Composite model saved as SSP XML-file
- **Support for SSP** – System Structure and Parameterization standard
- **Numerically stable** co-simulation with **TLM**

OMSimulator – GUI and SSP support

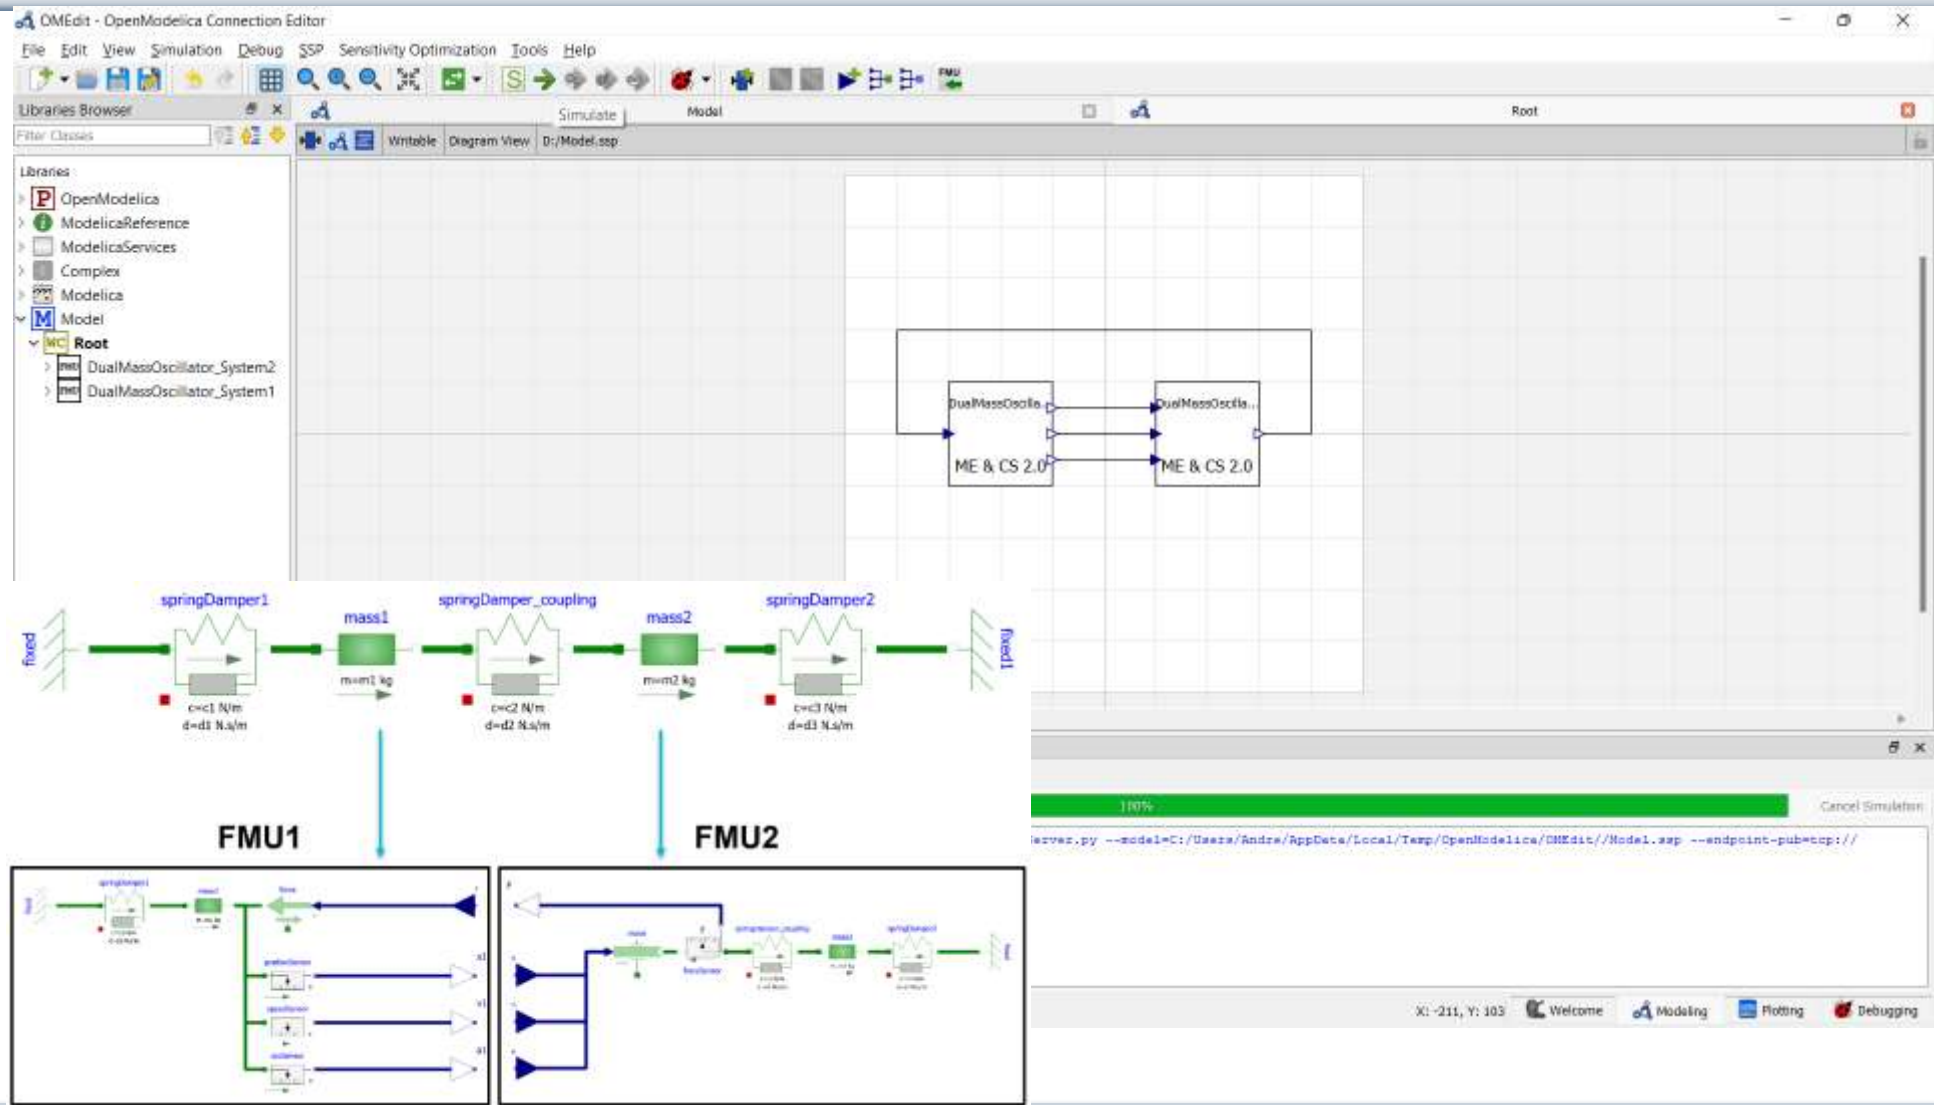


OMSimulator Simulation, SSP, and Tool Comparison

Adding SSP bus connections

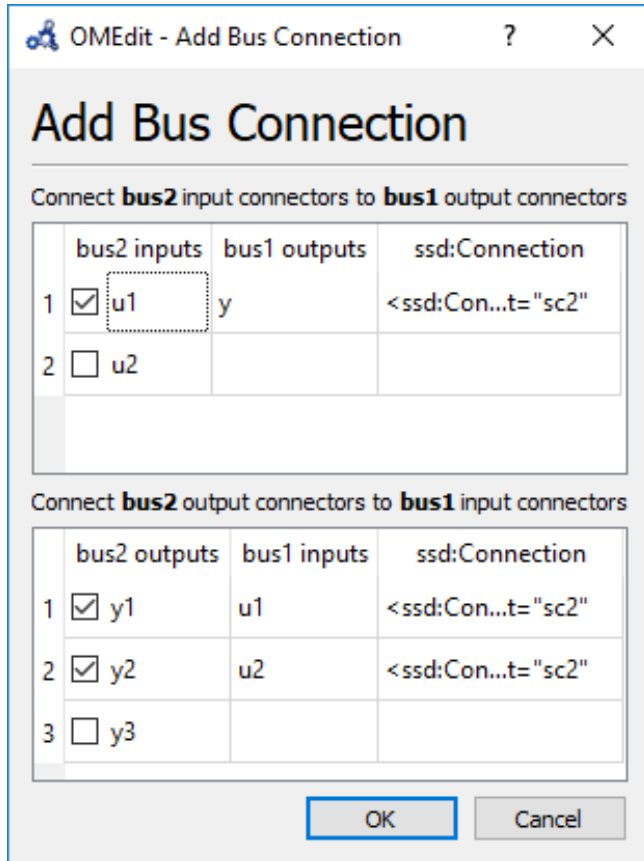

FMI Simulation results in OMEdit

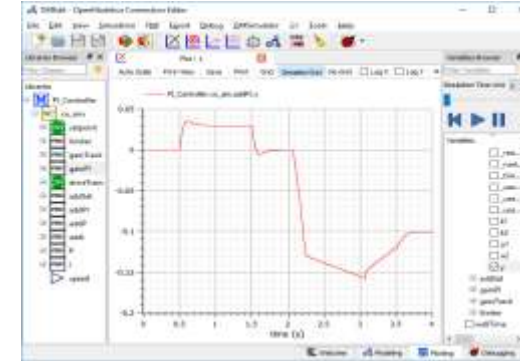


FMI Simulation Tool Comparison

	OMSimulator	DACCOSIM	Simulink	PyFMI
Commercial	No	No	Yes	No
Open-source	OSMC-PL, GPL	AGPL2	No	LGPL
Lookup Table	Yes	Yes	Yes	No
Alg. Loops	Yes	Yes	No	Yes
Scripting	Python, Lua	proprietary	proprietary	Python
GUI	Yes	Yes	Yes	No
SSP	Yes	No	No	No
platform	Linux/Win/macOS	Linux/Win	Linux/Win/macOS	Linux/Win/macOS


	Dymola	PySimulator	FMI Go!	FMI Composer
Commercial	Yes	No	No	Yes
Open-source	No	BSD	MIT	No
Lookup Table	Yes	Yes	Yes	Yes
Alg. Loops	Yes	Yes	Yes	Yes
Scripting	proprietary	Python	Go	No
GUI	Yes	Yes	No	Yes
SSP	No	No	Yes	Yes
platform	Linux/Win	Linux/Win	Linux/Win/macOS	Linux/Win/macOS

OpenModelica Functional Mockup Interface (FMI)

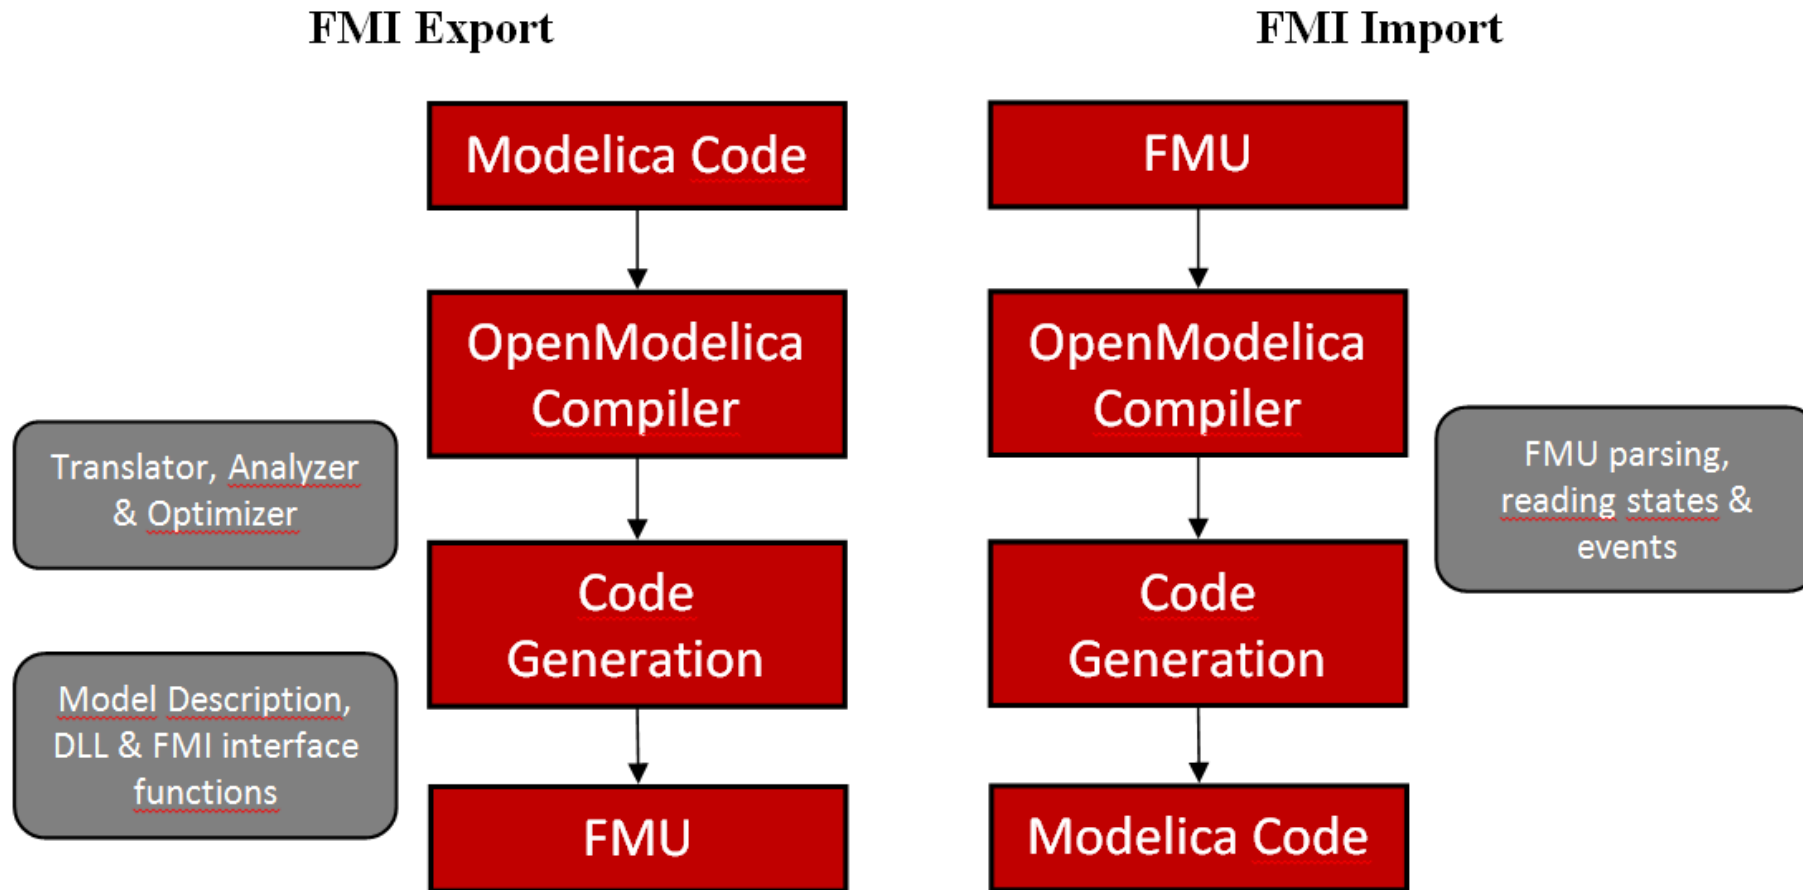

FMI in OpenModelica

- Model Exchange implemented (FMI 2.0)
- FMI 2.0 Co-simulation implemented
- Subset FMI 3.0 implemented for simulation using OpenModelica OMSimulator
- The FMI interface is accessible via the **OpenModelica scripting environment**, the **OpenModelica Connection Editor** and the **OMSimulator** tool in OpenModelica

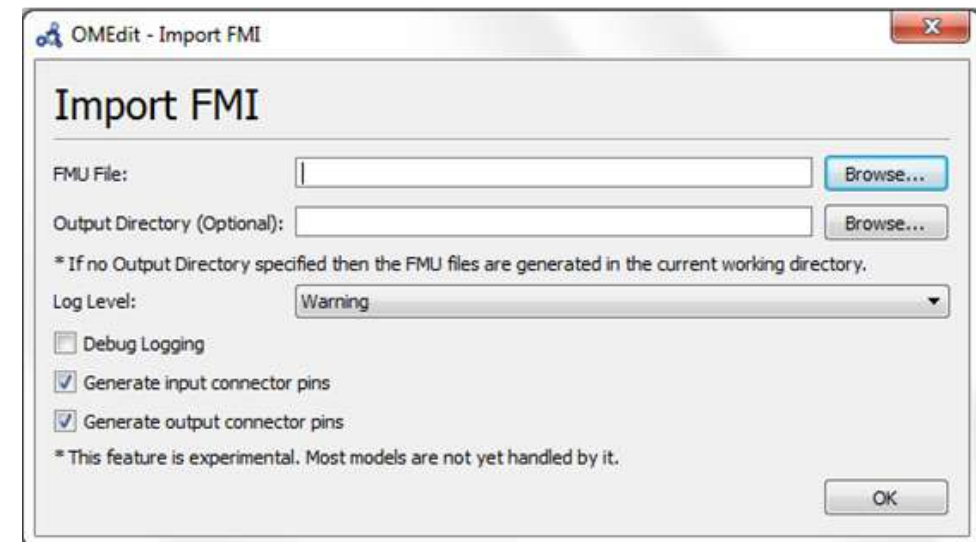

OpenModelica Code Generators for Embedded Real-time Code

- A **full-fledged** OpenModelica-generated source-code FMU (Functional Mockup Unit) code generator
 - Can be used to **cross-compile FMUs** for platforms with more available memory.
 - These platforms can **map** FMI inputs/outputs to analog/digital I/O in the importing FMI master.
- A very **simple code generator** generating a **small footprint** statically linked executable.
 - Not an FMU because there is no OS, filesystem, or shared objects in microcontrollers.

Code Generator Comparison, Full vs Simple

	Full Source-code FMU targeting 8-bit AVR proc	Simple code generator targeting 8-bit AVR proc
Hello World (0 equations)	43 kB flash memory 23 kB variables (RAM)	130 B flash memory 0 B variables (RAM)
SBHS Board (real-time PID controller, LCD, etc)	68 kB flash memory 25 kB variables (RAM)	4090 B flash memory 151 B variables (RAM)

The largest 8-bit AVR processor MCUs (Micro Controller Units) have 16 kB SRAM.

One of the more (ATmega328p; Arduino Uno) has 2 kB SRAM.


The ATmega16 we target has **1 kB SRAM available** (stack, heap, and global variables)

The Simple Code Generator


Supports only a limited Modelica subset

- No initialization (yet)
- No strongly connected components
- No events
- No functions (except external C and built-in)
- Only parts that OpenModelica can generate good and efficient code for right now (extensions might need changes in the intermediate code)
 - Unused variables are not accepted (OM usually duplicates all variables for pre() operators, non-linear system guesses, etc... but only a few of them are actually used)
- FMU-like interface (but statically linked)

Communication & I/O Devices: MODELICA_DEVICEDRIVERS Library

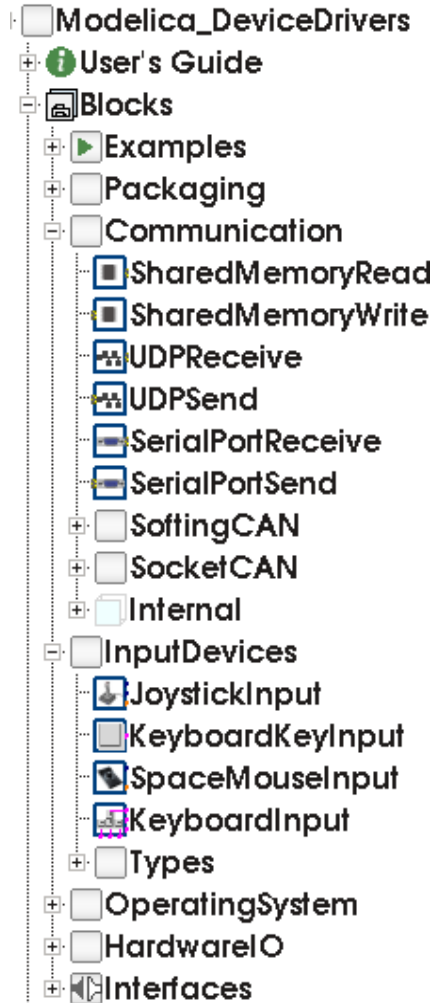


- **Free library** for interfacing hardware drivers
- **Cross-platform** (Windows and Linux)
- UDP, SharedMemory, CAN, Keyboard, Joystick/Gamepad
- DAQ cards for digital and analog IO (only Linux)
- Developed for **interactive real-time** simulations

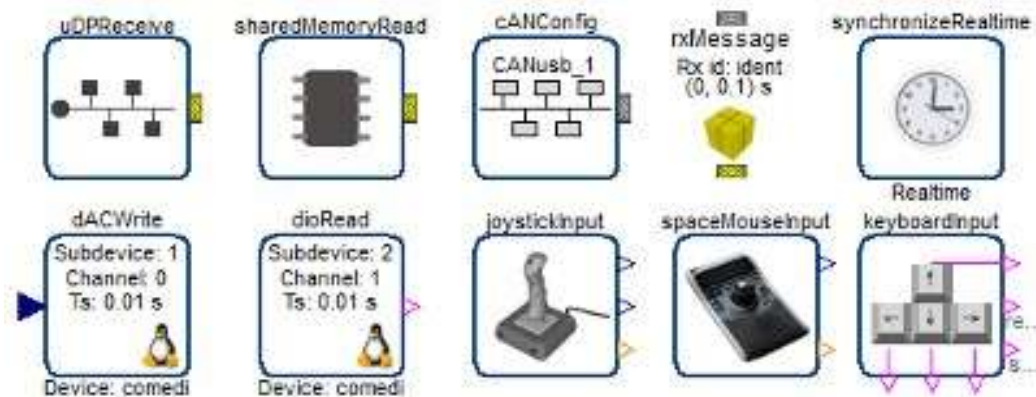

https://github.com/modelica/Modelica_DeviceDrivers/

Modelica connected to external hardware

- IMU (Inertial Measurement Unit)
- Interfaced with a CAN-bus (Controller Area Network bus) - uses Modelica_DeviceDrivers Library
- Visualized in OMEdit

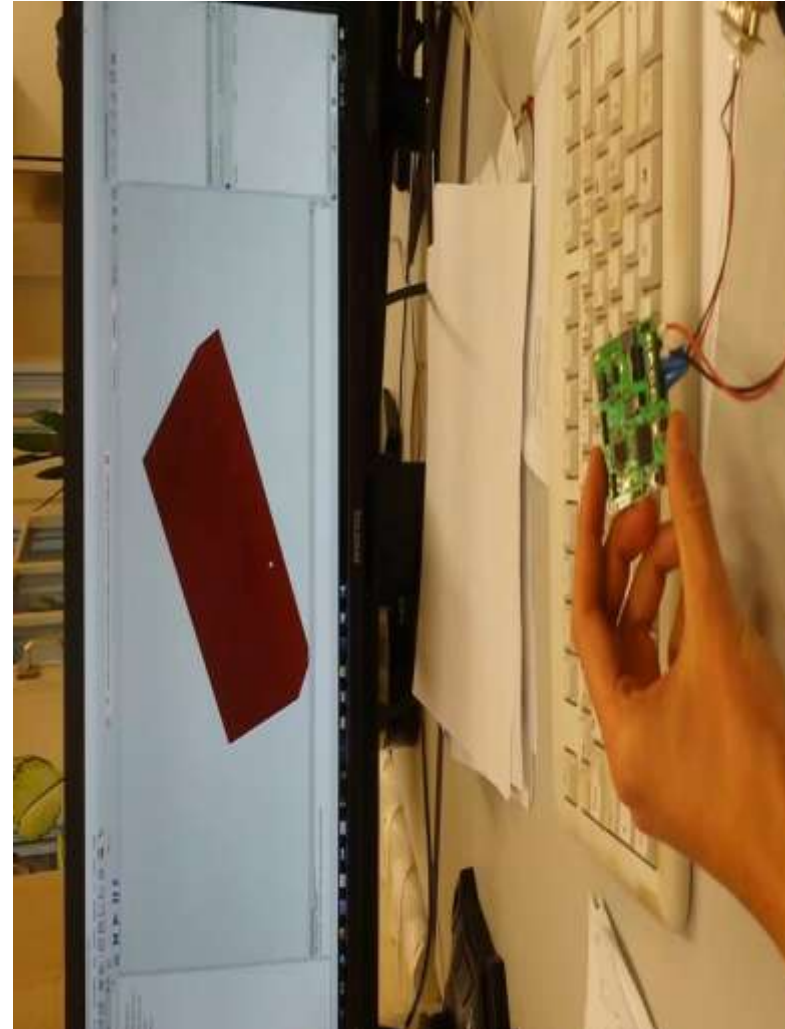

Courtesy of Volker Waurich - TU Dresden

OpenModelica and Device Drivers Library

AVR Processor Support

- No direct Atmel AVR or Arduino support in the OpenModelica compiler
- **Everything is done by the Modelica DeviceDrivers library**
- **All I/O is modeled explicitly in Modelica**, which makes code generation very simple

Modelica Device Drivers Library - AVR processor sub-packages:

- IO.AVR.Analog (ADC – Analog Input)
- IO.AVR.PWM (PWM output)
- IO.AVR.Digital.LCD (HD44780 LCD driver on a single 8-pin digital port)
- OS.AVR.Timers (Hardware timer setup, used by real-time and PWM packages)
- OS.AVR.RealTime (very simple real-time synchronization; one interrupt per clock cycle; works for single-step solvers)

Use Case: SBHS (Single Board Heating System)

Single board heating system (IIT Bombay)

- Used for teaching basic control theory
- Usually controlled by serial port (set fan value, read temperature, etc)
- OpenModelica can generate code targeting the ATmega16 on the board (AVR-ISP programmer in the lower left).
- Program size is 4090 bytes including LCD driver and PID-controller (out of 16 kB flash memory available).



Movie Demo, see next page!

Example – Code Generation to SHBS




OpenModelica – ModelicaML UML Profile



SysML/UML to Modelica OMG Standardization

- ModelicaML is a UML Profile for SW/HW modeling
 - Applicable to “pure” UML or to other UML profiles, e.g. SysML
- Standardized Mapping UML/SysML to Modelica
 - Defines transformation/mapping for **executable** models
 - Being **standardized** by OMG
- ModelicaML
 - Defines graphical concrete syntax (graphical notation for diagram) for representing Modelica constructs integrated with UML
 - Includes graphical formalisms (e.g. State Machines, Activities, Requirements)
 - Which do not exist in Modelica language
 - Which are translated into executable Modelica code
 - Is defined towards generation of executable Modelica code
 - Current implementation based on the Papyrus UML tool + OpenModelica

Example: Simulation and Requirements Evaluation

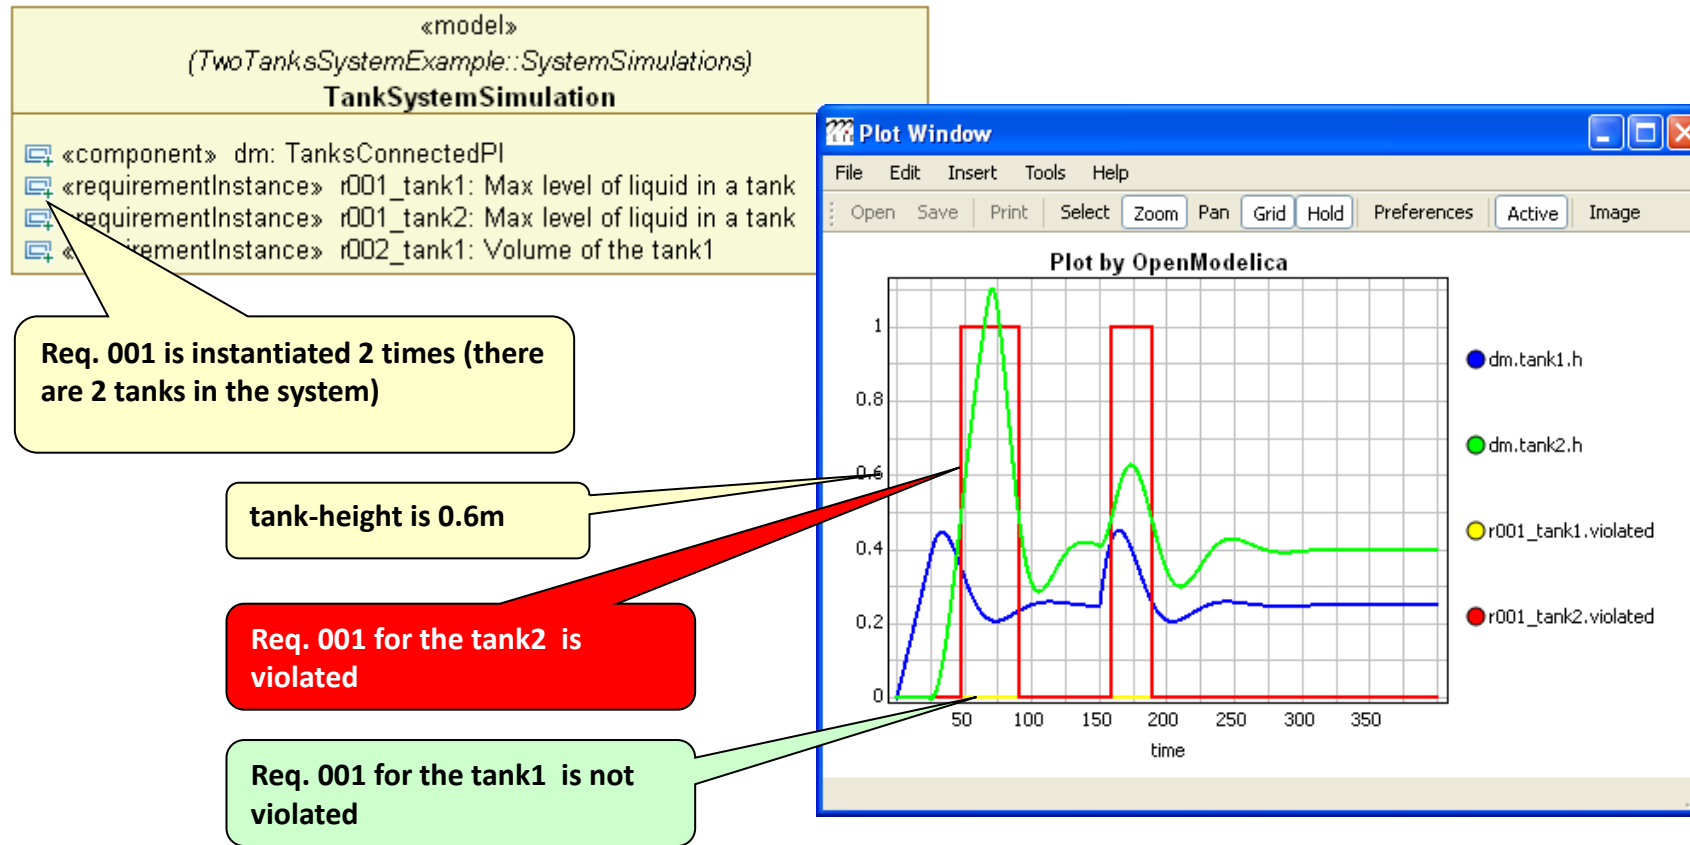

vVDR Method – virtual Verification of Designs vs Requirements

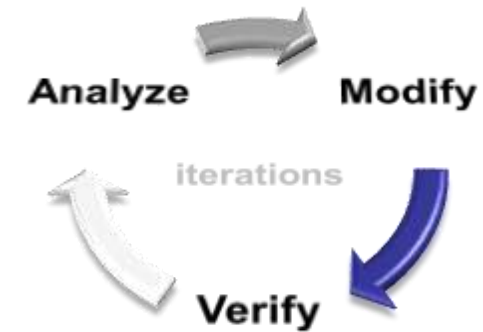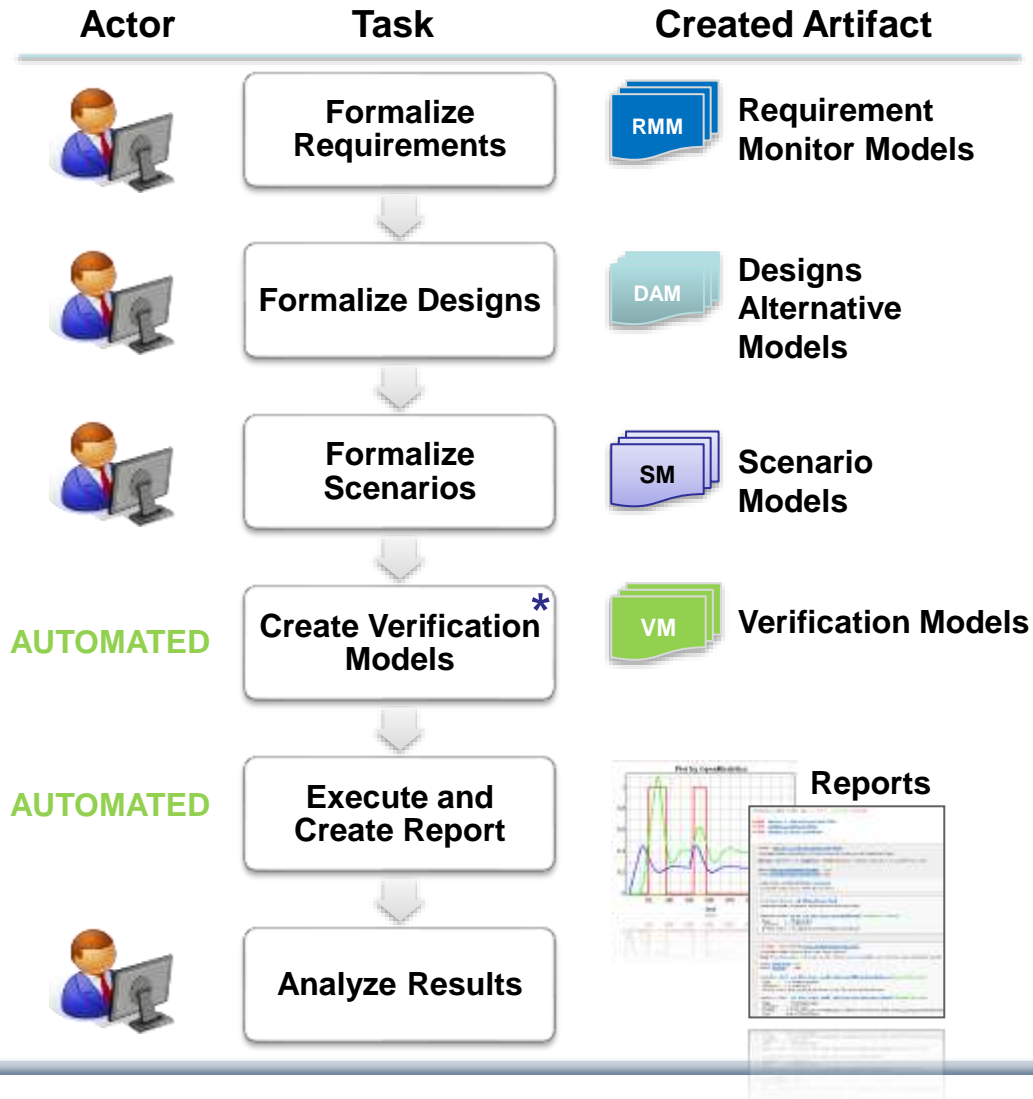

Goal: Enable on-demand verification of designs against requirements using automated model composition at any time during development.

Need for Debugging Tools

Map Low vs High Abstraction Level

- A **major part** of the total **cost** of software projects is due to testing and debugging
- US-Study 2002: Software errors cost the US economy **annually~ 60 Billion \$**
- **Problem: Large Gap in Abstraction Level** from **Equations** to **Executable Code**
- Example error message (hard to understand)
Error solving nonlinear system 132
time = 0.002
residual[0] = 0.288956
x[0] = 1.105149
residual[1] = 17.000400
x[1] = 1.248448
...

OpenModelica MDT Algorithmic Code Debugger

The screenshot displays the Eclipse IDE interface for debugging the OpenModelica MDT. The main window is titled "Debug - HelloWorld/SimulationModel.mo - Eclipse SDK". The interface is divided into several panes:

- Debug Console:** Shows the current thread as "Main Thread (stepping)" and the current execution point at "eqFunction_3 at simulationmodel.mo:5".
- Stack Frames:** A list of stack frames showing the current function call "eqFunction_3 at simulationmodel.mo:5" and the caller "getValueMultipliedByTwo at simulationmodel.mo:13".
- Variables View:** A table showing the current state of variables:

Name	Declared Type	Value	Actual Type
inValue	Real	1	double
outValue	Real	6.9453280720608359e-308	double
- Code Editor:** Displays the source code for "SimulationModel.mo", including the "getValueMultipliedByTwo" function definition.

```
model SimulationModel
  Real x(start = 1);
  Real y(start = 1);
  algorithm
    x := getValueMultipliedByTwo(x);
    y := x;
end SimulationModel;

function getValueMultipliedByTwo
  input Real inValue;
  output Real outValue;
  algorithm
    outValue := inValue * 2;
  end getValueMultipliedByTwo;
```
- Outline:** Shows the project structure, including the "SimulationModel" package and its variables "x" and "y".
- Console:** Shows the output of the simulation, including the path to the executable file.

The OpenModelica MDT Debugger (Eclipse-based) Using Japanese Characters

Debug - trunk/testsuite/mosfiles-nosim/QuotedFunction.mo - Eclipse SDK

File Edit Navigate Search Run Project Window Help

Correct Indentation Build project

Debug MDT

MDT GDB [Modelica Development Tooling (MDT) GDB]

MDT

Main Thread (stepping)

- オープンモデリッカー・ロックス at quotedfunction.mo:5
- Ceval_cevalCallFunction at Ceval.mo:1294
- Ceval_ceval at Ceval.mo:318
- Interactive_evaluateExpr at Interactive.mo:935
- Interactive_evaluateExprToStr at Interactive.mo:985
- Interactive_evaluate2 at Interactive.mo:507
- Interactive_evaluateToStdOut at Interactive.mo:329
- Interactive_evaluateToStdOut at Interactive.mo:333
- Interactive_evaluateToStdOut at Interactive.mo:333

Name	Declared Type	Value
キャン・サー・デバガー・シー・ミー	Real	1.5
イエッス・イット・キャン	Real	-4.836697827222

moGenerator.c Main.mo Util.mo System_omc.cpp systemimpl.c QuotedFunction.mo 31

```
function 'オープンモデリッカー・ロックス'  
  input Real 'キャン・サー・デバガー・シー・ミー';  
  output Real 'イエッス・イット・キャン';  
algorithm  
  'イエッス・イット・キャン' := sin('キャン・サー・デバガー・シー・ミー');  
end 'オープンモデリッカー・ロックス';
```

Console Tasks Problems Executables

MDT GDB [Modelica Development Tooling (MDT) GDB] C:\OpenModelica\trunk\testsuite\bootstrapping\main.exe

```
true  
""
```

OpenModelica Equation Model Debugger

The screenshot displays the OMEdit - Transformational Debugger interface. It is divided into three main panes:

- Variables View:** Shows a tree structure of variables. The 'frame' variable is expanded to show 'boxBody1', 'body', 'frame_a', and 'R'. The 'R' variable is further expanded to show 'T'.
- Equations View:** Shows a list of equations with their indices and types. The 'Equation Operations' pane shows the operations performed on the equations, such as 'solve', 'scalarize', 'simplify', 'inline', and 'substitute'.
- Source View:** Shows the source code of the model. The code is highlighted in blue, indicating the location of the error.

Showing equation transformations of a model:

```
0 = y + der(x * time * z); z = 1.0;
```

(1) **substitution:**

```
y + der(x * (time * z))
=>
y + der(x * (time * 1.0))
```

(2) **simplify:**

```
y + der(x * (time * 1.0))
=>
y + der(x * time)
```

(3) **expand derivative (symbolic diff):**

```
y + der(x * time)
=>
y + (x + der(x) * time)
```

(4) **solve:**

```
0.0 = y + (x + der(x) * time)
=>
der(x) = ((-y) - x) / time
time <> 0
```

Mapping run-time error to source model position

Transformations Browser – EngineV6 Overview (11 116 equations in model)

The screenshot displays the OMEdit - Transformational Debugger interface. The main window is titled "OMEdit - Transformational Debugger" and shows the file path: `/tmp/OpenModelica_marsj/OMEdit/Modelica.Mechanics.MultiBody.Examples.Loops.EngineV6_info.xml`.

The interface is divided into several panes:

- Variables Browser:** Shows a list of variables with columns for "Variables", "Comment", "Line", and "Location". The variable `phi` is highlighted.
- Defined In Equations:** A table showing the origin of variables. For `phi`, it lists index 587 (initial, nonlinear) and index 5016 (regular, nonlinear).
- Used In Equations:** A table showing where variables are used. For `phi`, it lists several regular (assignment) equations involving `der(cylinder3.B2.phi)`.
- Equations Browser:** Shows a list of equations with columns for "Inc", "Type", and "Equation". The equation `der(cylinder3.B2.R_rel.T[3,3])` is highlighted.
- Equation Operations:** A section showing the operations performed on the selected equation, including solving, substituting, differentiating, and simplifying.
- Source Browser:** Shows the source code for the selected equation, including assertions for joint connectivity and rotation calculations.

```
306 Connections.branch(frame_a.R,
307 frame_b.R);
308
309 assert(cardinality(frame_a) > 0,
310 "Connector frame_a of revolute
311 joint is not connected");
312
313 assert(cardinality(frame_b) > 0,
314 "Connector frame_b of revolute
315 joint is not connected");
316
317 angle = phi_offset + phi;
318 w = der(phi);
319 a = der(w);
320
321 // relationships between quantities
322 of frame_a and of frame_b
323 frame_b.r_0 = frame_a.r_0;
324
325 if rooted(frame_a.R) then
326 R_rel = Frames.planarRotation(e,
327 phi_offset + phi, w);
328 frame_b.R =
329 Frames.absoluteRotation(frame_a.R,
330 R_rel);
331 frame_a.f = -
332 Frames.resolve(R_rel, frame_b.f);
333 frame_a.t = -
334 Frames.resolve(R_rel, frame_b.t);
335 else
336 R_rel = Frames.planarRotation(-e,
337 phi_offset + phi, w);
338 frame_a.R =
339 Frames.absoluteRotation(frame_b.R,
340 R_rel);
341 frame_b.f = -
342 Frames.resolve(R_rel, frame_a.f);
343 frame_b.t = -
344 Frames.resolve(R_rel, frame_a.t);
345 end if;
346
347 // d'Alemberts principle
348 tau = -frame_b.t*e;
349
350 // Connection to internal
```

Equation Model Debugger on Siemens Model (Siemens Evaporator test model, 1100 equations)

The screenshot displays the OMEGA - Transformational Debugger interface. On the left, the 'Equations Browser' lists 1488 equations. The 'Equation' column shows the following entries:

Index	Type	Equation
1481	regular	Evap.Hes.LnC.u[1] := Evap.Hes.LnC.m[1] * Evap.L
1482	regular	Evap.Hes.LnC.flowModel.mud[1] := Modelica.Med
1483	regular	Evap.Hes.LnC.mediums[1].sig.Tot := Modelica.Mh
1484	regular	Evap.Hes.LnC.mediums[2].sig.Tot := 1e-005 * Evap.L
1485	regular	Evap.Hes.LnC.stateFM[2].phase := if Evap.Hes.Ln
1486	regular	Evap.Hes.LnC.heatTransferT[2] := Modelica.Medi
1487	regular	Evap.Hes.LnC.mediums[2].T_degC := -273.15 + Ev
1488	regular	Evap.Hes.LnC.stateFM[2].T := Modelica.Media.W
1489	regular	Evap.Hes.LnC.m[2] := Evap.Hes.LnC.fluidVolume
1470	regular	Evap.Hes.LnC.mediums[2].u := Evap.Hes.LnC.m[2]
1471	regular	Evap.Hes.LnC.u[2] := Evap.Hes.LnC.m[2] * Evap.L
1472	regular	Evap.Hes.LnC.flowModel.mud[2] := Modelica.Med
1473	regular	Evap.Hes.LnC.mediums[2].sig.Tot := Modelica.Mh
1474	regular	Evap.Hes.LnC.flowModel.Fa_g[1] := 0.5 * (Evap.H
1475	regular	Evap.Hes.LnC.flowModel.dps_fg[1] := -2.0 * DIVER
1476	regular	Evap.Hes.LnC.m_flow[2] := Modelica.Fluid.Pipe
1477	regular	Evap.Hes.LnC.flowModel.sig.act[1] := if noEven
1478	regular	Evap.Hes.LnC.flowModel[1] := Evap.Hes.LnC.m
1479	regular	Evap.Hes.LnC.H_flow[2] := semiLinear(Evap.Hes
1480	regular	Evap.Hes.LnC.flowModel.sig.act[1] := if noEven
1481	regular	Evap.Hes.LnC.state_s,T := Modelica.Media.Wate
1482	regular	Evap.Hes.LnC.state_s,d := Modelica.Media.Wate
1483	regular	Evap.Hes.LnC.state_s,T := Modelica.Media.Wate
1484	regular	Evap.Hes.LnC.state_s,d := Modelica.Media.Wate
1485	regular	Evap.Hes.LnC2.Area_g := Evap.Hes.LnC2.Area_g
1486	regular	Evap.Hes.LnC2.dv[2] := Evap.Hes.LnC2.dv[2]
1487	regular	Evap.Hes.LnC2.dv[1] := Evap.Hes.LnC2.dv[1]
1488	regular	Evap.Hes.LnC2.dv[1] := Evap.Hes.LnC2.dv[1]

A callout box points to the equation $y = u1/u2;$ in the code editor. The code editor shows the following snippet:

```
equation  
y = u1/u2;  
annotation {  
Documentation(info="html"  
<p>  
This block computes the output <b>y</b> (element-wise)  
by <b>dividing</b> the corresponding elements of  
the two inputs <b>u1</b> and <b>u2</b>:  
</p>  
<pre>  
y = u1 / u2;  
</pre>  
</html>"),  
Icon(coordinateSystem(  
preserveAspectRatio=true,  
extent={{-100,-100},{100,100}},  
initialScale=0.1), graphics={  
Line(points={{50,0},{100,0}}, color={0,0,127}),  
Line(points={{-30,0},{30,0}),  
Ellipse(fillPattern=FillPattern.Solid, extent={{-5,20},  
{5,30}}),  
Ellipse(fillPattern=FillPattern.Solid,  
extent={{-5,-30},{5,-20}}),  
Ellipse(lineColor={0,0,127}, extent={{-50,-50},  
{50,50}}),  
Text(  
lineColor={0,0,255},  
extent={{-150,110},{150,150}},  
textString="Name=")
```

Debugging Example – Detecting Source of Chattering (excessive event switching) causing bad performance

The screenshot shows the OMEdit - Transformational Debugger interface. The top panel displays the file path: /tmp/OpenModelica_marsj/OMEdit/Debugging.Chattering.ChatteringEvents1_info.xml. The interface is divided into several panes:

- Variables:** A table with columns for Variables, Comment, Line, and Location. It lists variables x, y, and z.
- Defined In Equations:** A table with columns for Inc, Type, and Equation. It shows equations for variables x, y, and z.
- Used In Equations:** A table with columns for Inc, Type, and Equation. It shows equations for variables y and z.
- Equations:** A table with columns for Inc, Type, and Equation. It lists equations for x, y, and z.
- Source Browser:** A code editor showing the source code for the model. The code includes package declarations, model declarations, and equations. A black arrow points to the equation `z = if x > 0 then -1 else 1;` in the source browser.

The source code in the Source Browser is as follows:

```
1 within ;
2 package Debugging "Test
3 cases for debugging of
4 declarative models"
5
6 package Chattering "Models
7 with chattering behaviour"
8
9 model ChatteringEvents1
10 "Exhibits chattering
11 after t = 0.5, with
12 generated events"
13
14 Real x(start=1,
15 fixed=true);
16
17 Real y;
18
19 Real z;
20
21 equation
22 z = if x > 0 then -1
23 else 1;
24
25 y = 2*z;
26
27 der(x) = y;
28
29 annotation
30 (Documentation(info="<html>
31 <p>After t = 0.5, chattering
32 takes place, due to the
33 tight
34 equation.</p>
35 <p>Chattering can be
36 detected because of
37 tightly spaced events are
38 generated. The feedback to
39 the user now allows to
40 identify the equation from
41 which the zero crossing
42 function that generates the
43 events originates.</p>
44 </html>"),
45 experiment(StopTime=1));
46
47 end ChatteringEvents1;
48
49
50 model ChatteringEvents2
51 "Exhibits chattering
52 after t = 0.422, with
53 generated events"
```

equation
z = if x > 0 then -1 else 1;
y = 2*z;

Error Indication – Simulation Slows Down

Running Simulation of Debugging.Chattering.ChatteringEvents1.
Please wait for a while.

52%

Cancel Simulation

OMEdit - Debugging.Chattering.ChatteringEvents1 Simulation Output

Output | Compilation |

```
/tmp/OpenModelica/OMEdit/Debugging.Chattering.ChatteringEvents1 -  
port=50212 -logFormat=xml -w -lv=LOG_STATS  
stdout | info | Chattering detected around time  
0.500000005..0.500000995001 (100 state events in a row with a total time  
delta less than the step size 0.002). This can be a performance  
bottleneck. Use -lv LOG_EVENTS for more information. The zero-crossing  
was: x > 0.0 Debug more
```


Performance Profiling for Faster Simulation


(Here: Profiling all equations in MSL 3.2.1 DoublePendulum)

- Measuring **performance** of equation blocks to find bottlenecks
 - Useful as input before model simplification for real-time applications
- Integrated with the debugger to **point out the slow equations**
- Suitable for **real-time profiling** (collect less information), or a complete view of all equation blocks and function calls

Performance profiling DoublePendulum:

Equations Browser							Defines
Index	Type	Equation	Executi	Max time	Time	Fraction	Variable
+ 876	regular	linear, size 2	4602	0.000501	0.0134	75.7%	damper.a_rel revolute2.frame_b.f[2]
- 836	regular	(assignment) ...evolute2.phi)	1534	2.57e-05	0.000377	2.12%	
- 840	regular	(assignment) ...mper.phi_rel)	1534	1.38e-05	0.000237	1.33%	
- 837	regular	(assignment) ...evolute2.phi)	1534	8.38e-06	0.000235	1.32%	
- 841	regular	(assignment) ...mper.phi_rel)	1534	8.48e-06	0.000192	1.08%	
- 849	regular	(assignment) ...mper.phi_rel)	1534	8.04e-06	0.000146	0.824%	

Performance Profiling of Siemens Drum Boiler Model with Evaporator

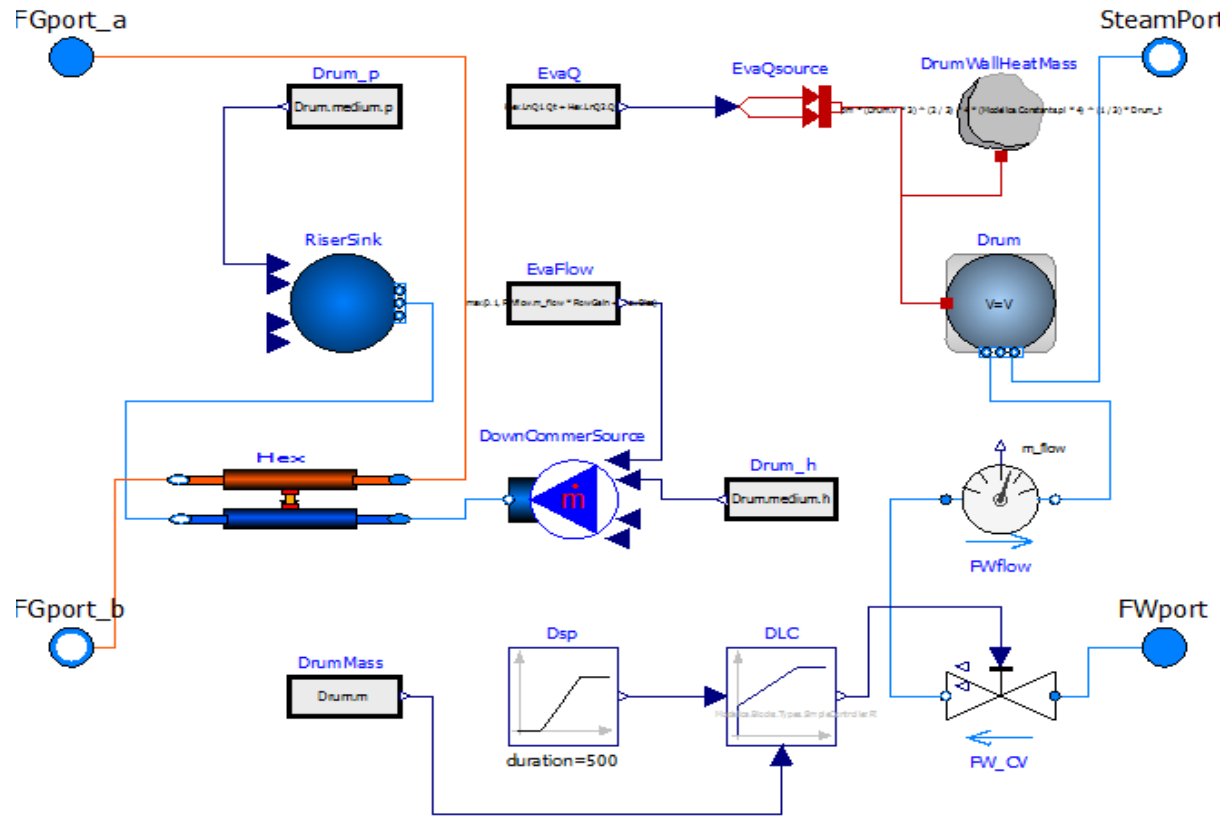

Conclusion from the evaluation:
“...the profiler makes the process of performance optimization radically shorter.”

ABB Industry Use of OpenModelica FMI 2.0 and Debugger

- ABB OPTIMAX® provides advanced model based control products for power generation and water utilities



- ABB: *“ABB uses several compatible Modelica tools, including OpenModelica, depending on specific application needs.”*
- ABB: *“OpenModelica provides outstanding debugging features that help to save a lot of time during model development.”*

Exercise 1.2 – Equation-based Model Debugger

In the model ChatteringEvents1, chattering takes place after $t = 0.5$, due to the discontinuity in the right hand side of the first equation. Chattering can be detected because lots of tightly spaced events are generated. The debugger allows to identify the (faulty) equation that gives rise to all the zero crossing events.

```
model ChatteringEvents1
  Real x(start=1, fixed=true);
  Real y;
  Real z;
equation
  z = noEvent(if x > 0 then -1 else 1);
  y = 2*z;
  der(x) = y;
end ChatteringEvents1;
```


Uses 25% CPU

acrotray.exe *32	petfr27	00	976 K	Acro Iray
AdobeARM.exe *32	petfr27	00	1,136 K	Adobe Reader an...
Bootcamp.exe	petfr27	00	1,448 K	Boot Camp Manager
conhost.exe	petfr27	00	1,300 K	Console Window ...
csrss.exe		00	3,000 K	
DCSHelper.exe *32	petfr27	00	660 K	DataCardMonitor
Debugging.Chattering...	petfr27	25	1,436 K	Debugging.Chatte...
dllhost.exe	petfr27	00	2,224 K	COM Surrogate

- Switch to OMEdit text view (click on text button upper left)
- Open the Debugging.mo package file using OMEdit
- Open subpackage Chattering, then open model ChatteringEvents1
- Simulate in debug mode
- Click on the button Debug more (see prev. slide)
- Possibly start task manager and look at CPU. Then click stop simulation button

Part III

Modelica language concepts and textual modeling


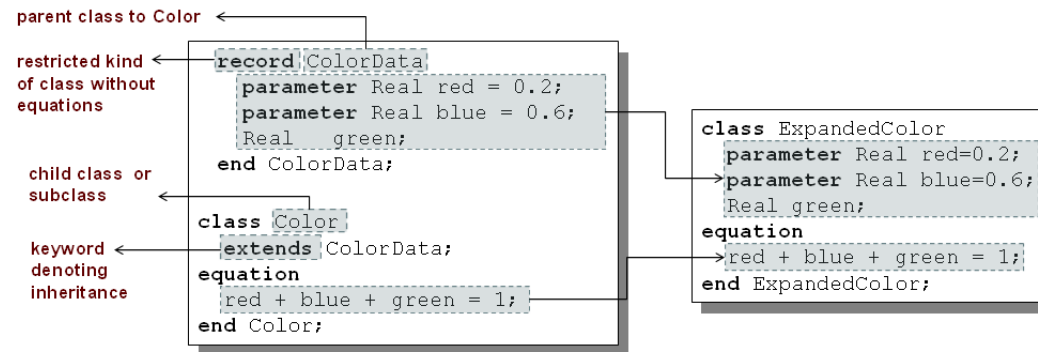


Typed
Declarative
Equation-based
Textual Language


Hybrid
Modeling

Acausal Modeling

The order of computations is not decided at modeling time

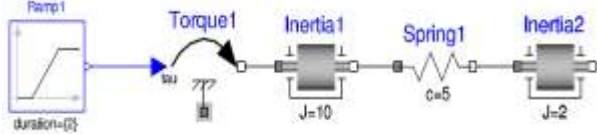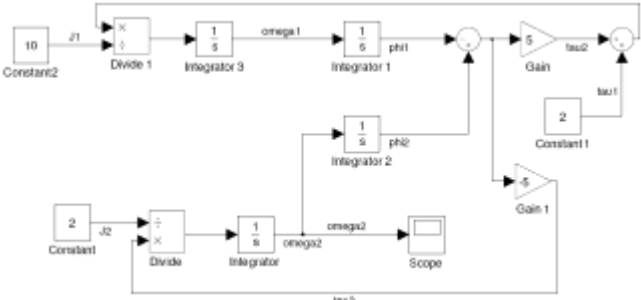
	Acausal	Causal
Visual Component Level	 <p>The diagram shows a mechanical system with three components in series: Inertia 1 (J=10), Spring 1 (c=5), and Inertia 2 (J=2). A Ramp input (duration=0) is applied to Inertia 1, producing Torque1. The components are connected such that the output of one is the input of the next, without specifying the direction of energy flow.</p>	 <p>The diagram is a block diagram representing the same mechanical system. It uses standard causal blocks: Constant2 (10), Divide 1, Integrator 3, Integrator 1, Gain, Constant 1, Gain 1, Integrator 2, Scope, and Constant (2). The flow of information is clearly defined from left to right, starting with the constant input and ending with the scope output.</p>
Equation Level	<p>A resistor <i>equation</i>: $R \cdot i = v;$</p>	<p>Causal possibilities: $i := v/R;$ $v := R \cdot i;$ $R := v/i;$</p>

Typical Simulation Process

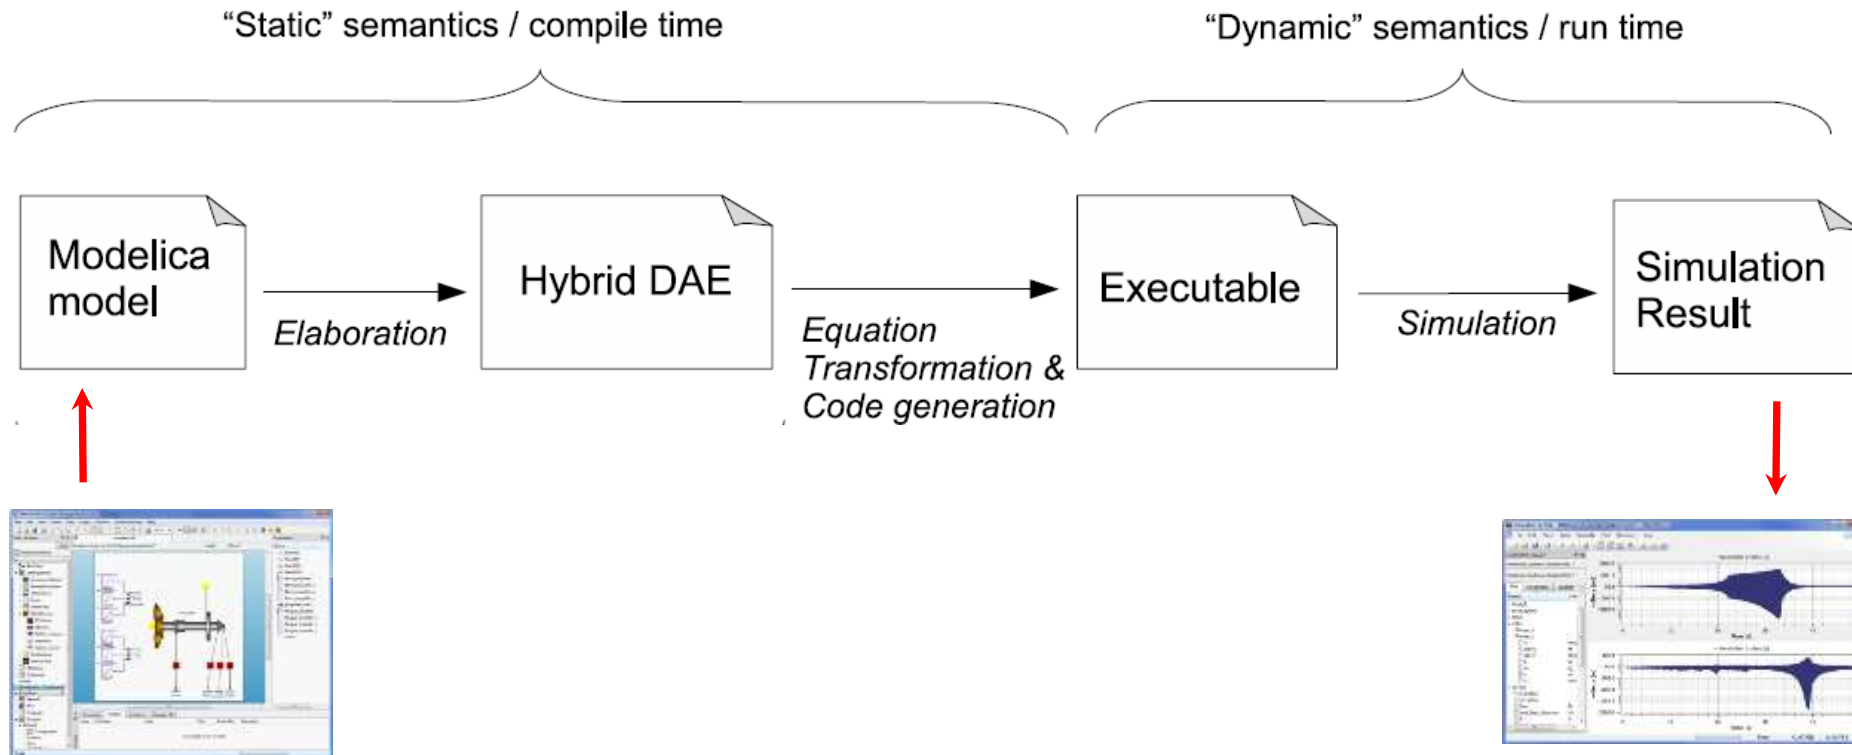


Simple model - Hello World!

Equation: $x' = -x$
Initial condition: $x(0) = 1$

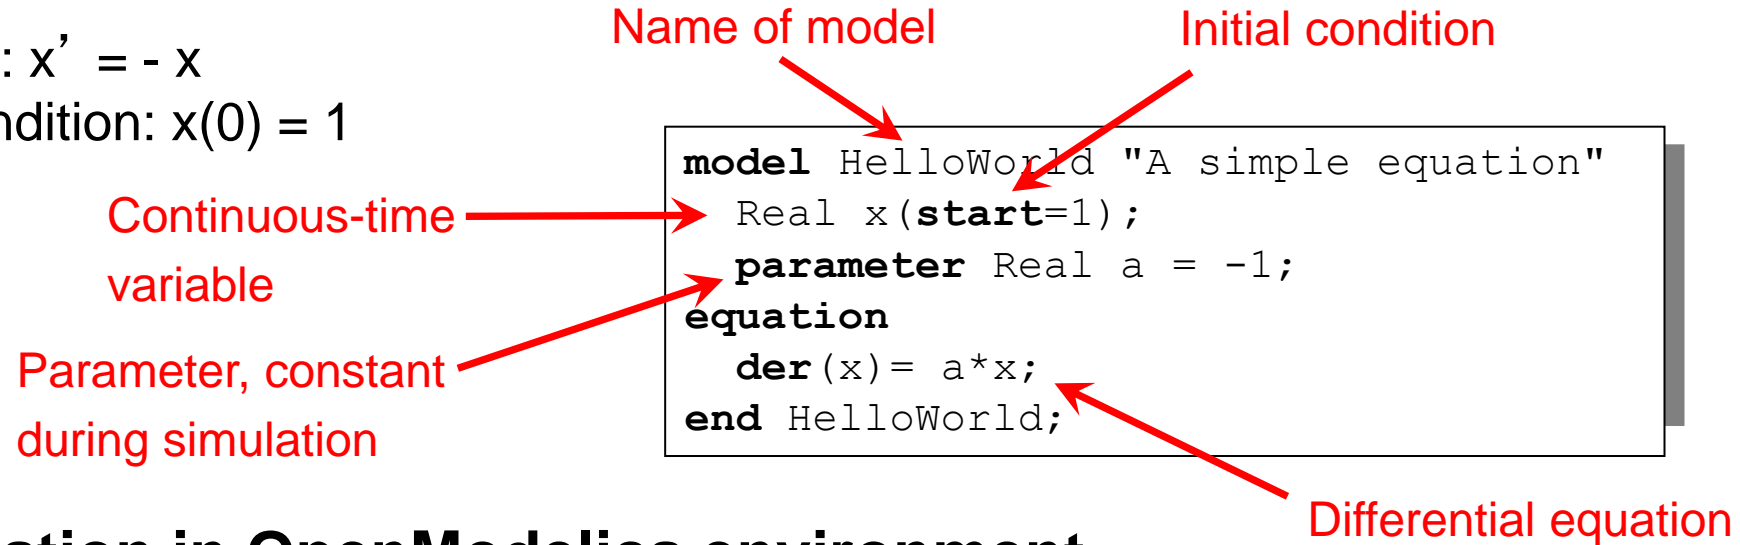

Simulation in OpenModelica environment

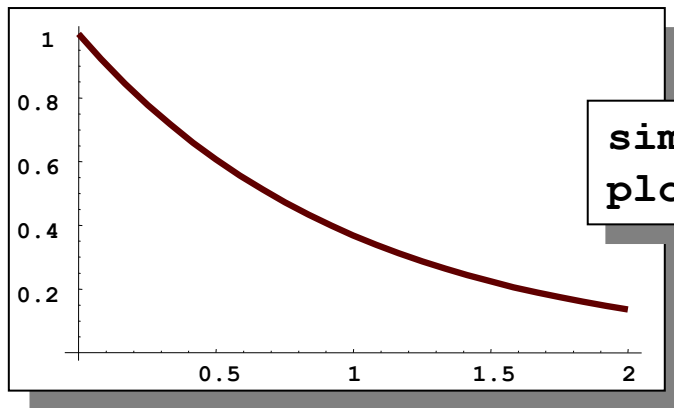

```
simulate(HelloWorld, stopTime = 2)  
plot(x)
```


Modelica Variables and Constants


- Built-in primitive data types

Boolean	true or false
Integer	Integer value, e.g. 42 or -3
Real	Floating point value, e.g. 2.4e-6
String	String, e.g. “Hello world”
Enumeration	Enumeration literal e.g. ShirtSize.Medium

- Parameters are constant during simulation
- Two types of constants in Modelica
 - **constant**
 - **parameter**

```
constant Real    PI=3.141592653589793;  
constant String  redcolor = "red";  
constant Integer one = 1;  
parameter Real    mass = 22.5;
```

A Simple Rocket Model

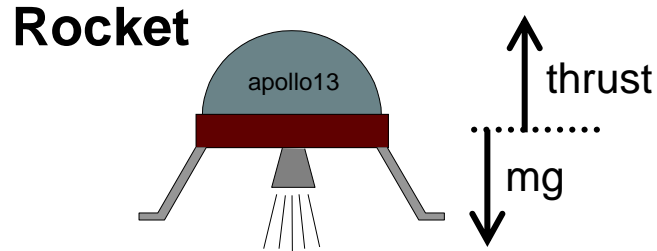

$$acceleration = \frac{thrust - mass \cdot gravity}{mass}$$

$$mass' = -massLossRate \cdot abs(thrust)$$

$$altitude' = velocity$$

$$velocity' = acceleration$$

new model

parameters (changeable before the simulation)

floating point type

differentiation with regards to time

```

class Rocket, "rocket class"
  parameter String name;
  Real mass(start=1038.358);
  Real altitude(start= 59404);
  Real velocity(start= -2003);
  Real acceleration;
  Real thrust; // Thrust force on rocket
  Real gravity; // Gravity forcefield
  parameter Real massLossRate=0.000277;
equation
  (thrust-mass*gravity)/mass = acceleration;
  der(mass) = -massLossRate * abs(thrust);
  der(altitude) = velocity;
  der(velocity) = acceleration;
end Rocket;
  
```

declaration comment

start value

name + default value

mathematical equation (acausal)

Celestial Body Class

A class declaration creates a *type name* in Modelica

```
class CelestialBody
  constant Real    g = 6.672e-11;
  parameter Real   radius;
  parameter String name;
  parameter Real   mass;
end CelestialBody;
```




An *instance* of the class can be declared by *prefixing* the type name to a variable name

```
...
CelestialBody moon;
...
```

The declaration states that **moon** is a variable containing an object of type **CelestialBody**

Moon Landing

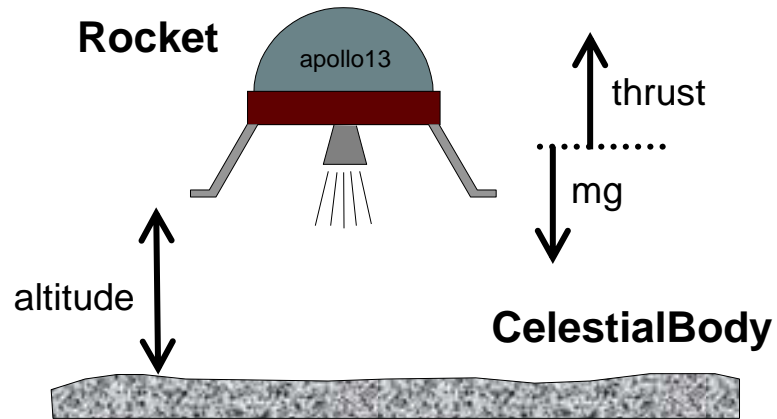

$$apollo.gravity = \frac{moon.g \cdot moon.mass}{(apollo.altitude + moon.radius)^2}$$


only access
inside the class

access by dot
notation outside
the class


```
class MoonLanding
  parameter Real force1 = 36350;
  parameter Real force2 = 1308;
  protected
  parameter Real thrustEndTime = 210;
  parameter Real thrustDecreaseTime = 43.2;
  public
  Rocket apollo(name="apollo13");
  CelestialBody moon(name="moon", mass=7.382e22, radius=1.738e6);
equation
  apollo.thrust = if (time < thrustDecreaseTime) then force1
                  else if (time < thrustEndTime) then force2
                  else 0;
  apollo.gravity=moon.g*moon.mass/(apollo.altitude+moon.radius)^2;
end MoonLanding;
```

Simulation of Moon Landing

```
simulate(MoonLanding, stopTime=230)  
plot(apollo.altitude, xrange={0,208})  
plot(apollo.velocity, xrange={0,208})
```

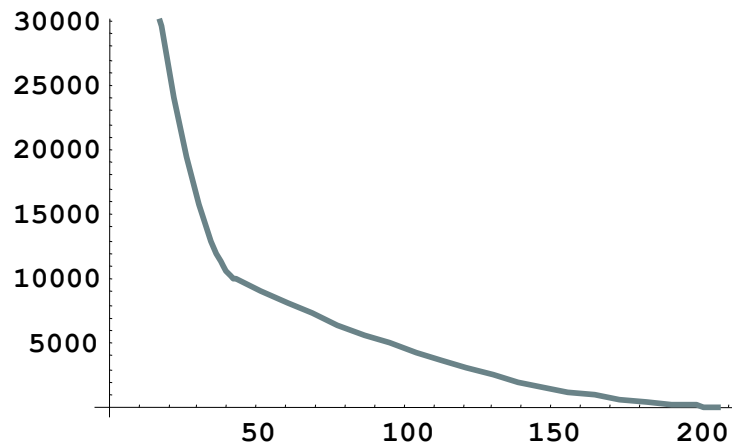

It starts at an altitude of 59404 (not shown in the diagram) at time zero, gradually reducing it until touchdown at the lunar surface when the altitude is zero

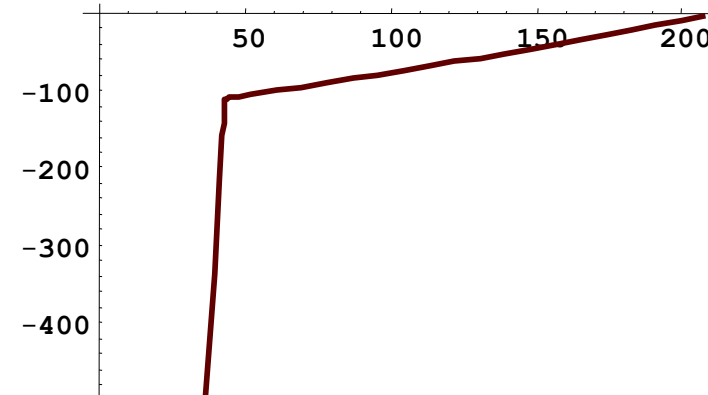

The rocket initially has a high negative velocity when approaching the lunar surface. This is reduced to zero at touchdown, giving a smooth landing

Specialized Class Keywords

- Classes can also be declared with other keywords, e.g.: `model`, `record`, `block`, `connector`, `function`, ...
- Classes declared with such keywords have specialized properties
- Restrictions and enhancements apply to contents of specialized classes
- After Modelica 3.0 the `class` keyword means the same as `model`
- Example: (Modelica 2.2). A `model` is a class that cannot be used as a connector class
- Example: A `record` is a class that only contains data, with no equations
- Example: A `block` is a class with fixed input-output causality

```
model CelestialBody
  constant Real    g = 6.672e-11;
  parameter Real   radius;
  parameter String name;
  parameter Real   mass;
end CelestialBody;
```

Modelica Functions

- Modelica Functions can be viewed as a specialized class with some restrictions and extensions
- A function can be called with arguments, and is instantiated dynamically when called

```
function sum
  input Real arg1;
  input Real arg2;
  output Real result;
algorithm
  result := arg1+arg2;
end sum;
```

Function Call – Example Function with for-loop

Example Modelica function call:


```
...  
p = polynomialEvaluator({1,2,3,4},21)
```

```
function PolynomialEvaluator  
  input Real A[:]; // array, size defined  
                // at function call time  
  input Real x := 1.0; // default value 1.0 for x  
  output Real sum;  
protected  
  Real xpower; // local variable xpower  
algorithm  
  sum := 0;  
  xpower := 1;  
  for i in 1:size(A,1) loop  
    sum := sum + A[i]*xpower;  
    xpower := xpower*x;  
  end for;  
end PolynomialEvaluator;
```

{1, 2, 3, 4} becomes
the value of the
coefficient vector A, and
21 becomes the value of
the formal parameter x.

The function
PolynomialEvaluator
computes the value of a
polynomial given two
arguments:
a coefficient vector A and
a value of x.


Inheritance

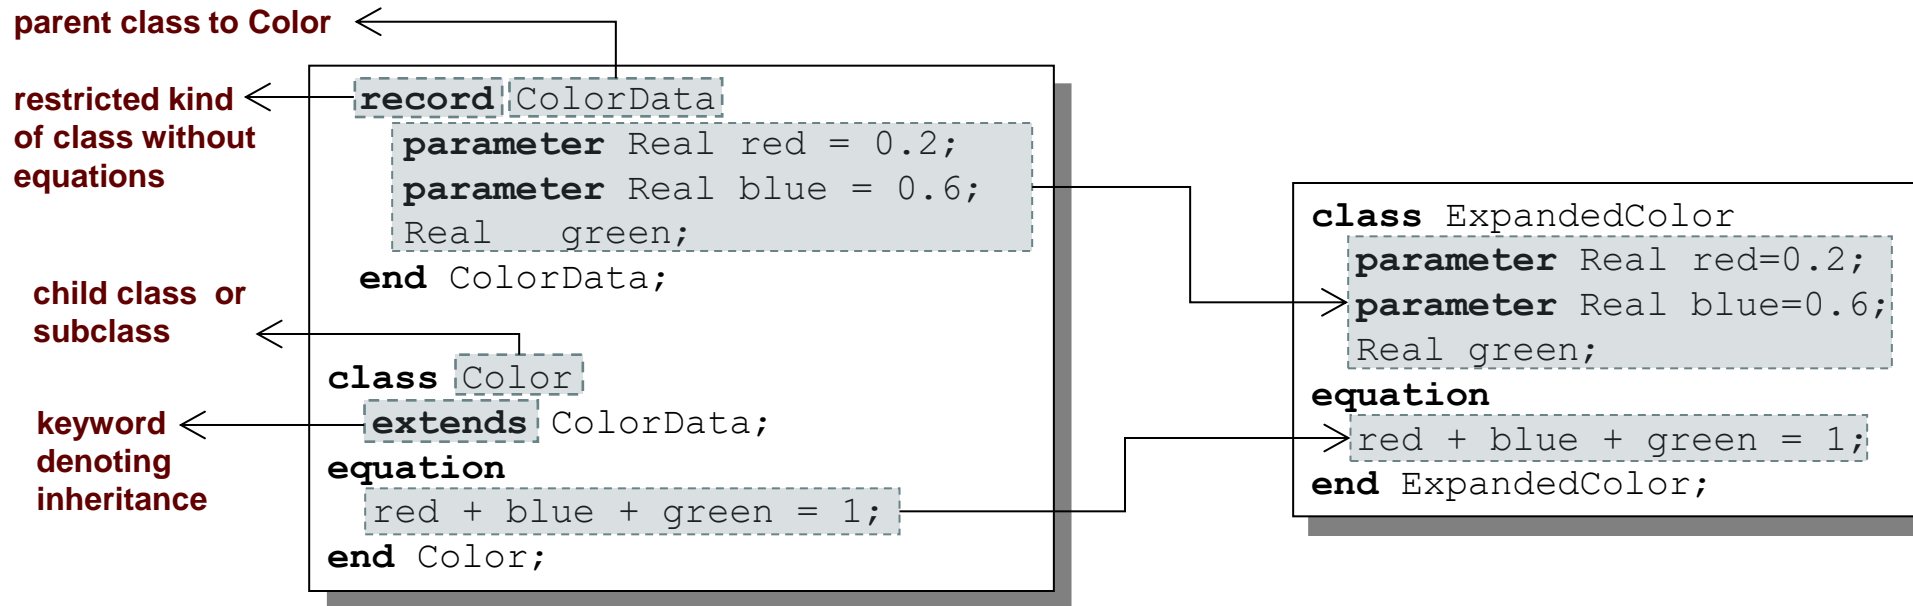

Data and behavior: field declarations, equations, and certain other contents are *copied* into the subclass


Multiple Inheritance

Multiple Inheritance is fine – inheriting both geometry and color

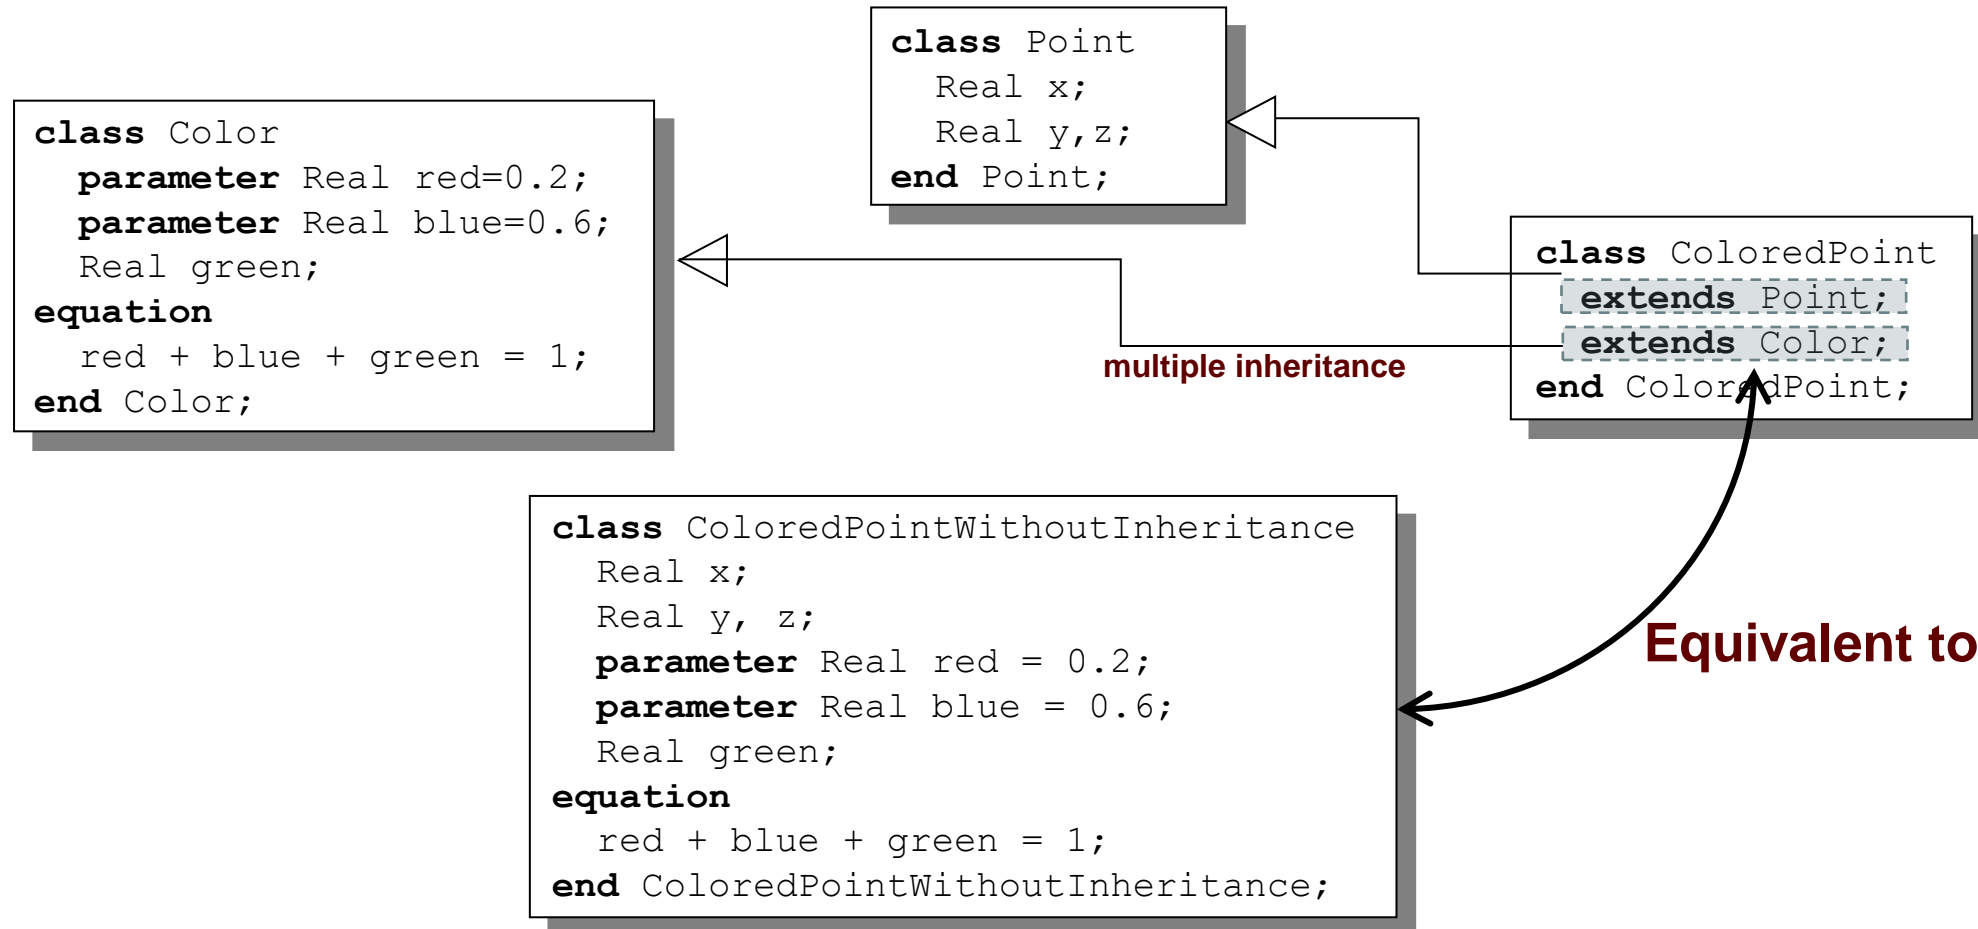

Multiple Inheritance cont'

Only one copy of multiply inherited class `Point` is kept

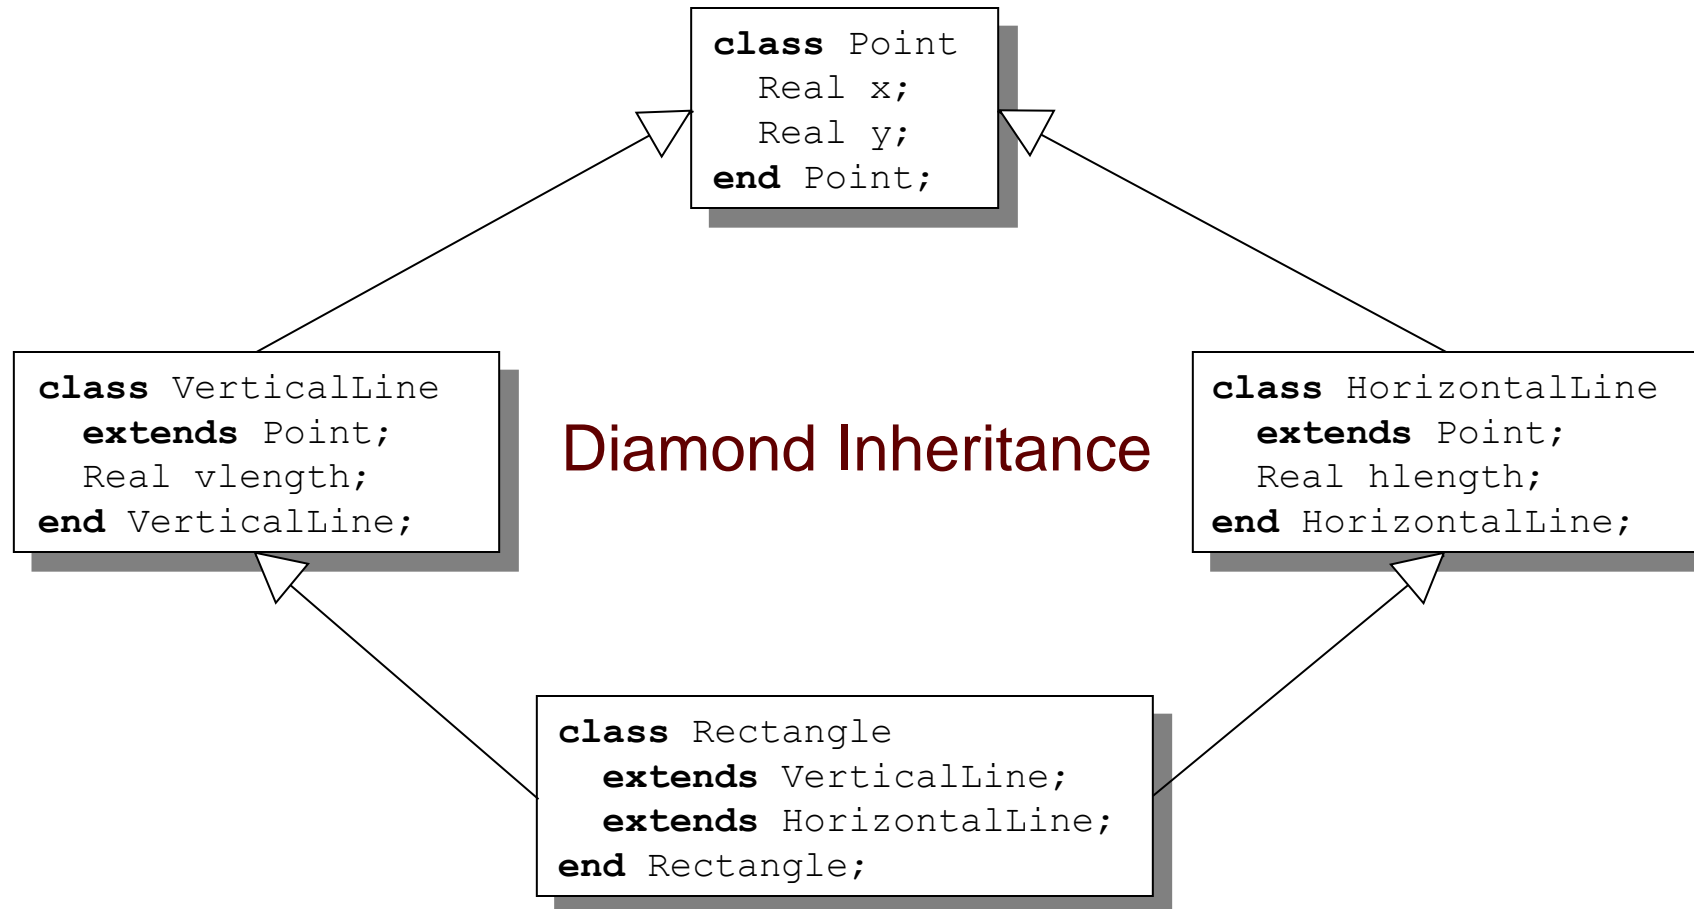

Simple Class Definition

- Simple Class Definition
 - Shorthand Case of Inheritance
- Example:

```
class SameColor = Color;
```

Equivalent to:

inheritance ←

```
class SameColor  
- extends Color;  
end SameColor;
```

- Often used for introducing new names of types:

```
type Resistor = Real;
```


```
connector MyPin = Pin;
```

Inheritance Through Modification


- Modification is a concise way of combining inheritance with declaration of classes or instances
- A *modifier* modifies a declaration equation in the inherited class
- Example: The class `Real` is inherited, modified with a different `start` value equation, and instantiated as an `altitude` variable:

```
...  
Real altitude(start= 59404);  
...
```

The Moon Landing - Example Using Inheritance (I)

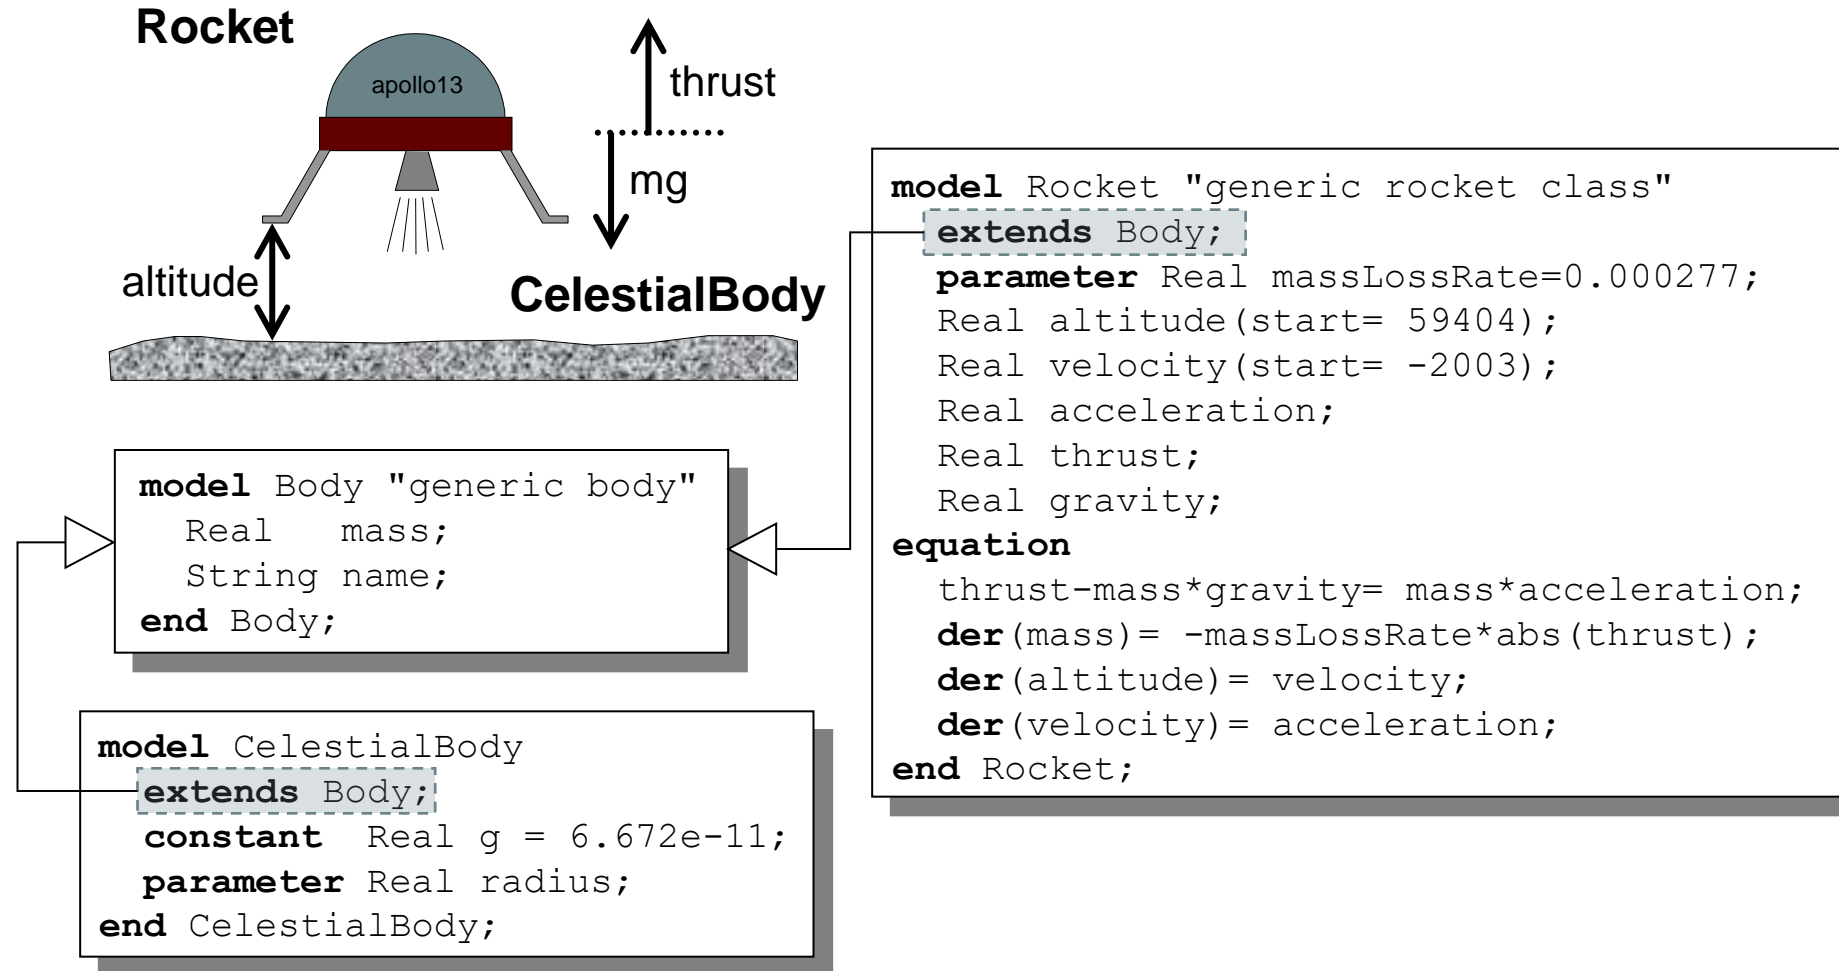


The Moon Landing - Example using Inheritance (II)

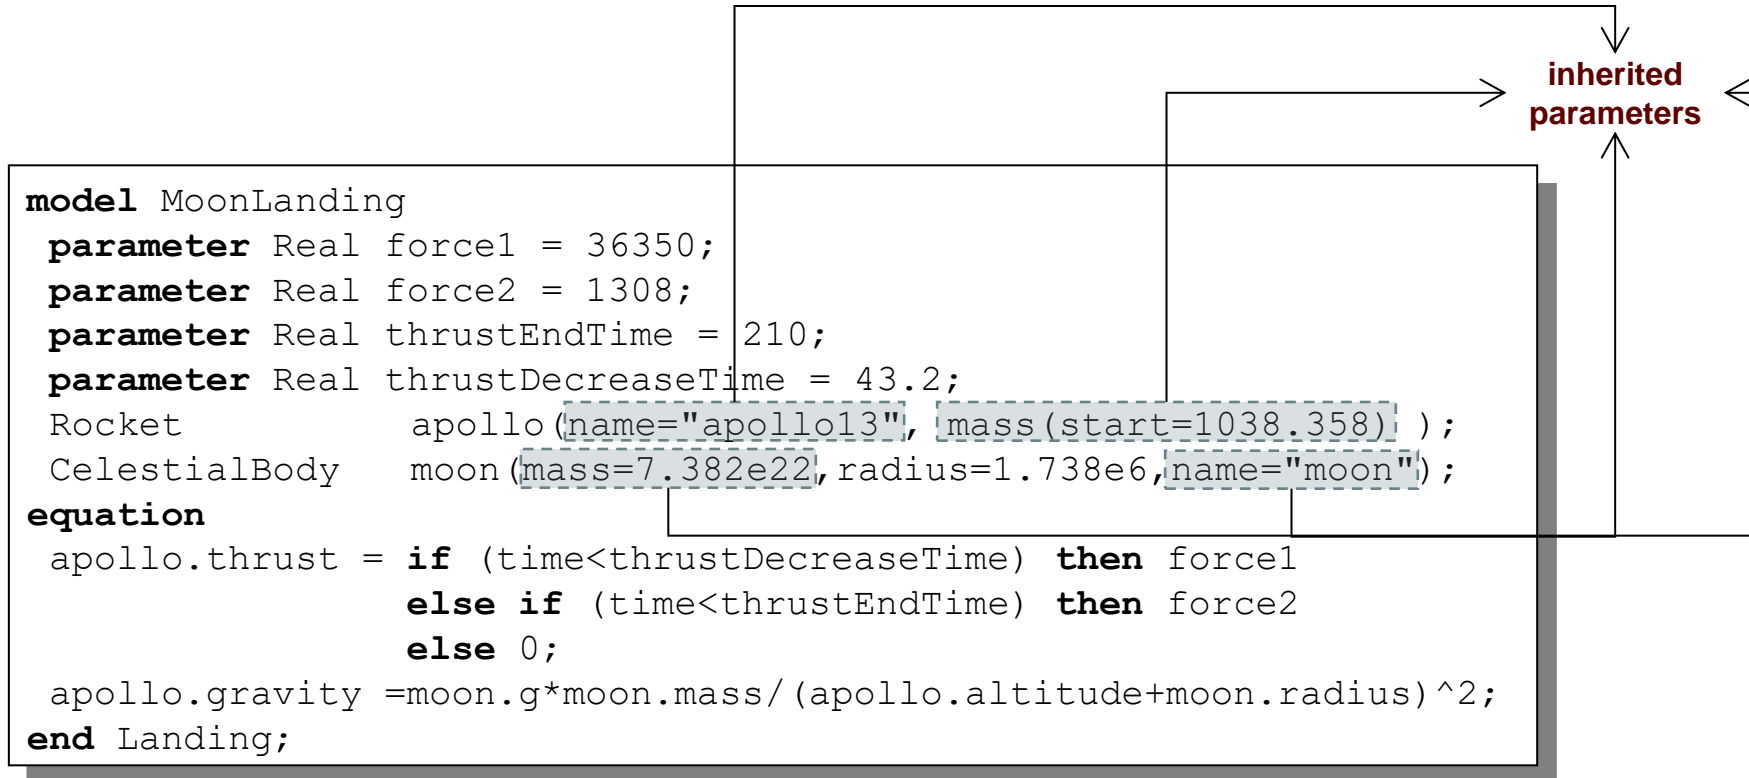

Inheritance of Protected Elements

If an `extends`-clause is preceded by the `protected` keyword, all inherited elements from the superclass become protected elements of the subclass

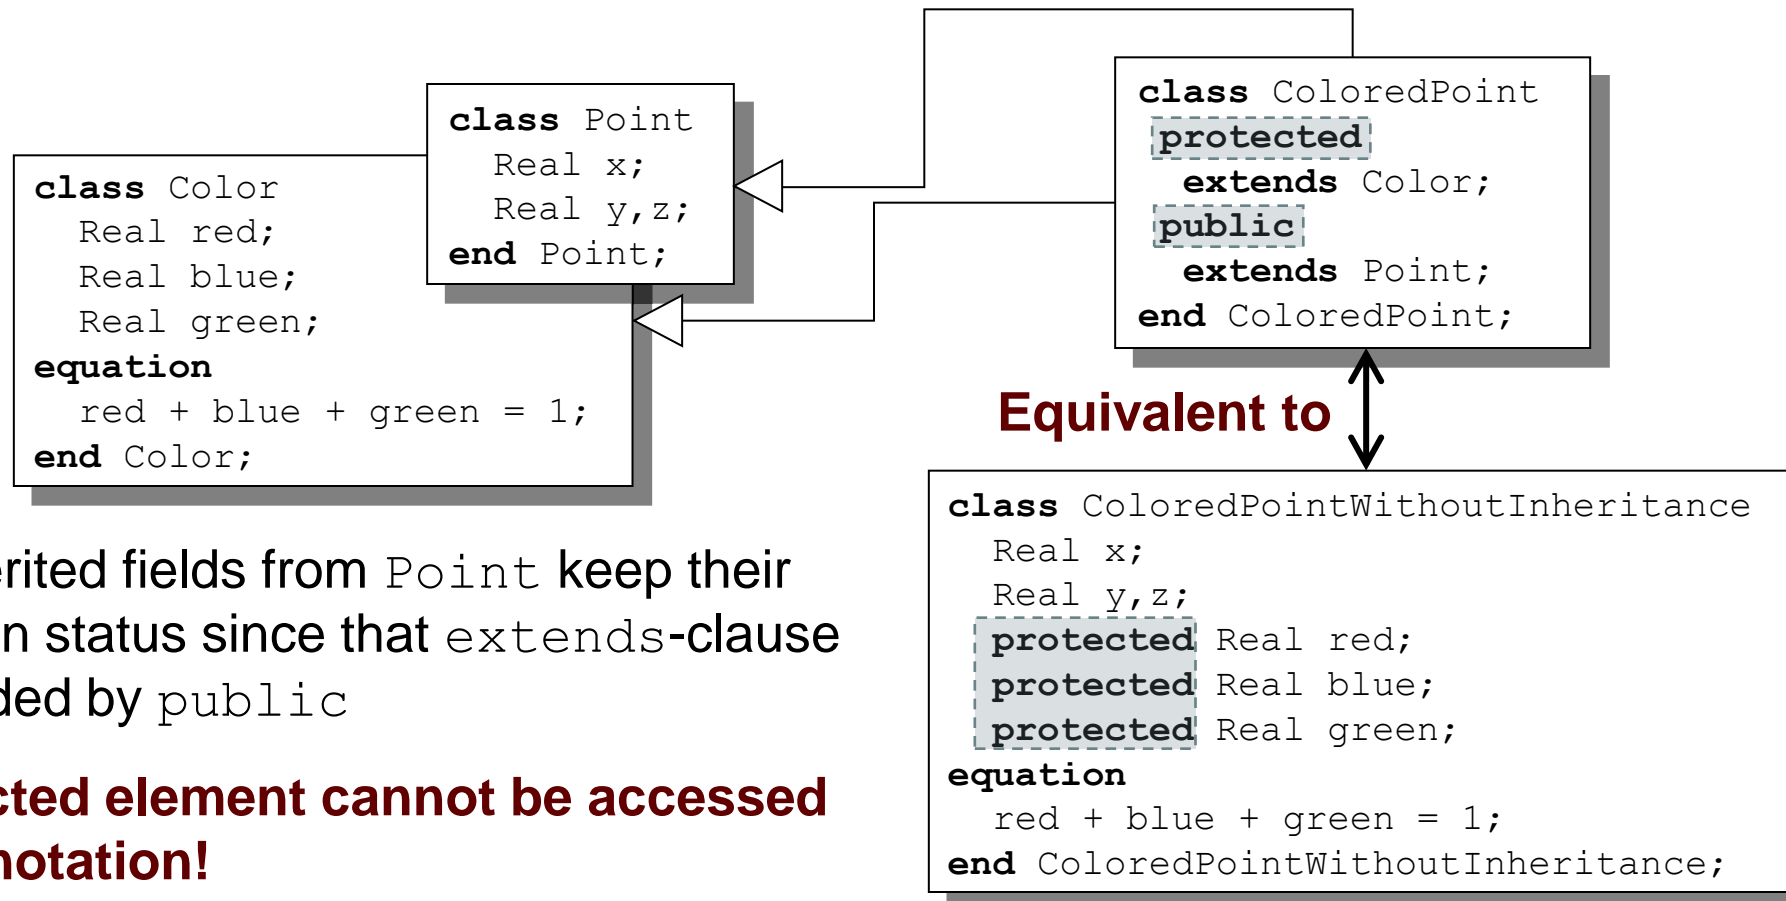

The inherited fields from `Point` keep their protection status since that `extends`-clause is preceded by `public`

A protected element cannot be accessed via dot notation!

Exercises Part III a (15 minutes)

Exercises Part III a

- Start OMNotebook (part of OpenModelica)
 - **Start**->Programs->OpenModelica->OMNotebook
 - **Open File**: Exercises-ModelicaTutorial.onb from the directory you copied your tutorial files to.
 - **Note**: The DrModelica electronic book has been automatically opened when you started OMNotebook.
 - (**Alternatively**: Open the OMWeb notebook <http://omwebbook.openmodelica.org/>)
- Open Exercises-ModelicaTutorial.pdf (also available in printed handouts)

Exercises 2.1 and 2.2 (See also next two pages)

- Open the **Exercises-ModelicaTutorial.onb** found in the Tutorial directory you copied at installation.
- **Exercise 2.1.** Simulate and plot the HelloWorld example. Do a slight change in the model, re-simulate and re-plot. Try command-completion, `val()`, etc.

```
class HelloWorld "A simple equation"  
  Real x(start=1);  
equation  
  der(x) = -x;  
end HelloWorld;  
  
simulate(HelloWorld, stopTime = 2)  
plot(x)
```

- Locate the VanDerPol model in DrModelica (link from Section 2.1), using OMNotebook!
- **(extra) Exercise 2.2:** Simulate and plot VanDerPol. Do a slight change in the model, re-simulate and re-plot.


Exercise 2.1 – Hello World!

A Modelica “Hello World” model

Equation: $x' = -x$
Initial condition: $x(0) = 1$

```
class HelloWorld "A simple equation"  
  parameter Real a=-1;  
  Real x(start=1);  
equation  
  der(x) = a*x; (*xxxxxx s*)  
end HelloWorld;
```

Simulation in OpenModelica environment

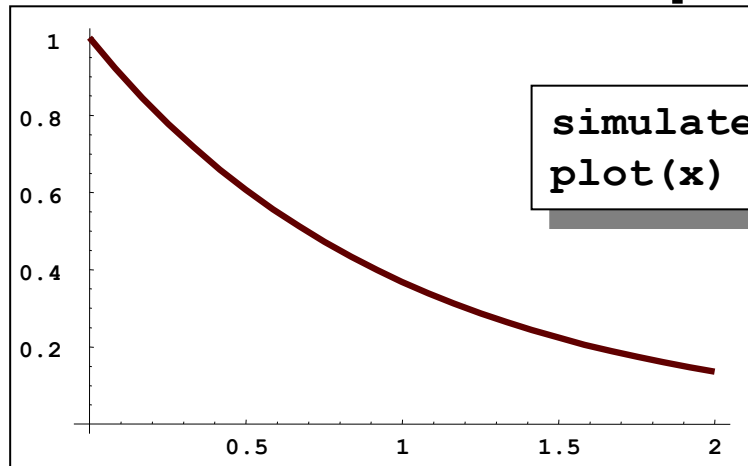


```
simulate(HelloWorld, stopTime = 2)  
plot(x)
```

(extra) Exercise 2.2 – Van der Pol Oscillator

```
class VanDerPol "Van der Pol oscillator model"  
  Real x(start = 1) "Descriptive string for x"; // x starts at 1  
  Real y(start = 1) "y coordinate";           // y starts at 1  
  parameter Real lambda = 0.3;  
equation  
  der(x) = y;                               // This is the 1st diff equation //  
  der(y) = -x + lambda*(1 - x*x)*y; /* This is the 2nd diff equation */  
end VanDerPol;
```

```
simulate(VanDerPol, stopTime = 25)  
plotParametric(x, y)
```

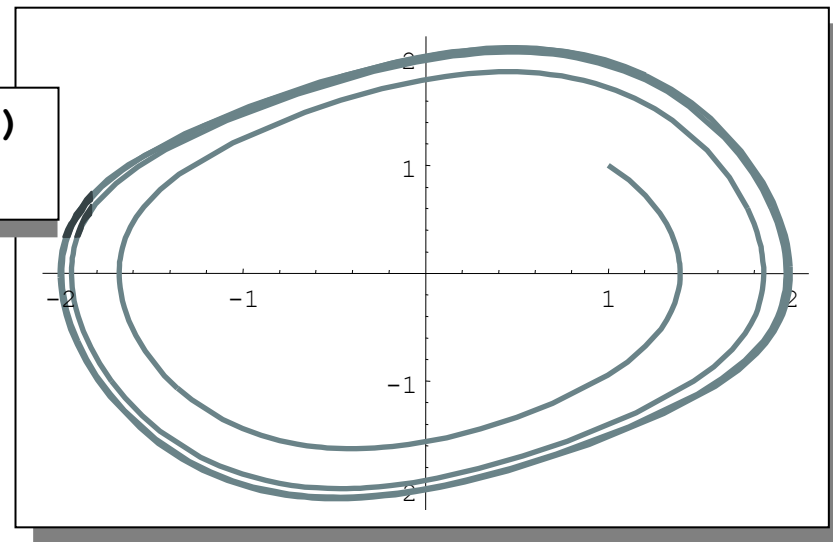

(extra) Exercise 2.3 – DAE Example


Include algebraic equation

Algebraic equations contain
no derivatives

Exercise: Locate in DrModelica.
Simulate and plot. Change
the model, simulate & plot.

```
class DAEexample
  Real x(start=0.9);
  Real y;
equation
  der(y) + (1 + 0.5 * sin(y)) * der(x)
    = sin(time);
  x - y = exp(-0.9 * x) * cos(y);
end DAEexample;
```

Simulation in OpenModelica environment

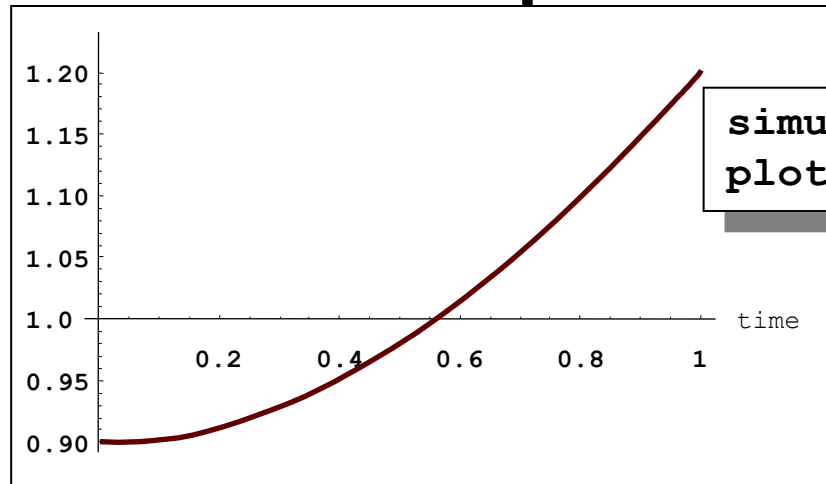

```
simulate(DAEexample, stopTime = 1)
plot(x)
```

Exercise 2.4 – Model the system below

- Model this Simple System of Equations in Modelica

$$\dot{x} = 2 \cdot x \cdot y - 3 \cdot x$$

$$\dot{y} = 5 \cdot y - 7 \cdot x \cdot y$$

$$x(0) = 2$$


$$y(0) = 3$$

(extra) Exercise 2.5 – Functions

- a) Write a function, **sum2**, which calculates the sum of Real numbers, for a vector of arbitrary size.
- b) Write a function, **average**, which calculates the average of Real numbers, in a vector of arbitrary size. The function **average** should make use of a function call to **sum2**.

Part III b


Discrete Events and Hybrid Systems

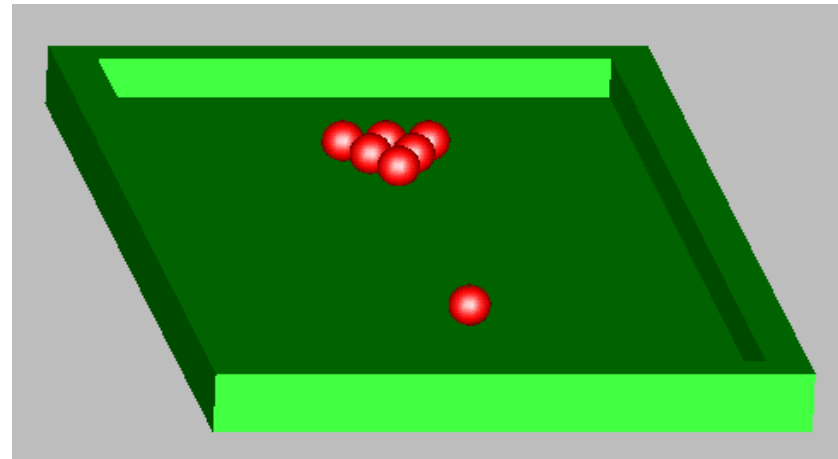

Picture: Courtesy Hilding Elmqvist

Modelica Hybrid Modeling

Hybrid modeling = continuous-time + discrete-time modeling

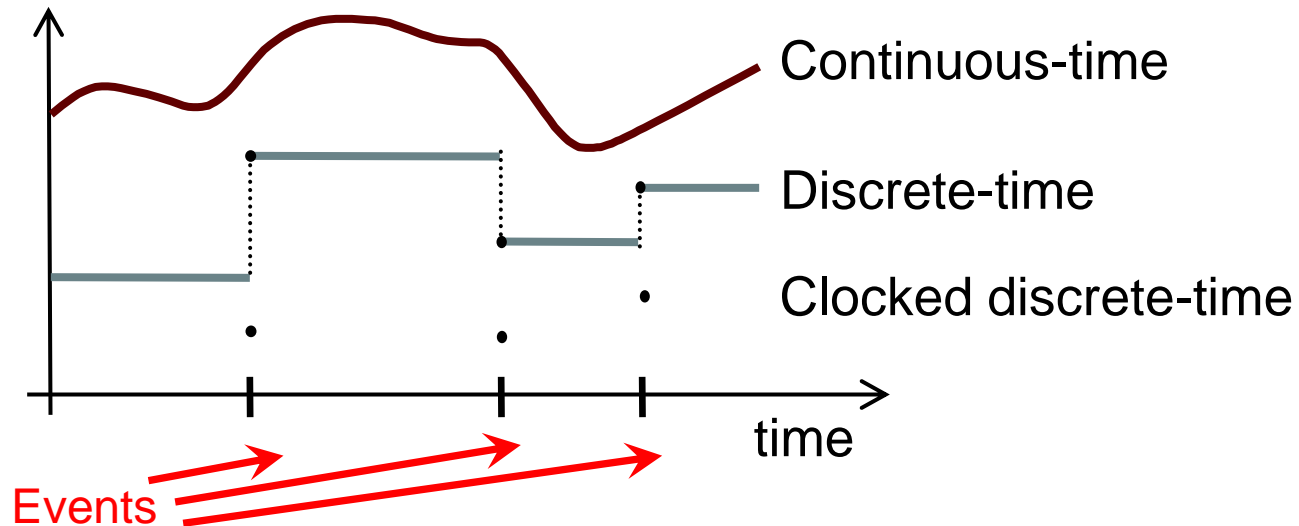

```
Real x;  
Voltage v;  
Current i;
```

```
discrete Real x;  
Integer i;  
Boolean b;
```

- A *point* in time that is instantaneous, i.e., has zero duration
- An event *condition* or *clock tick* so that the event can take place
- A set of *variables* that are associated with the event
- Some *behavior* associated with the event, e.g. *conditional equations* that become active or are deactivated at the event

Event Creation – if

if-equations, if-statements, and if-expressions

```
if <condition> then
  <equations>
elseif <condition> then
  <equations>
else
  <equations>
end if;
```

```
model Diode "Ideal diode"
  extends TwoPin;
  Real s;
  Boolean off;
  equation
    off = s < 0;
  if off then
    v=s
  else
    v=0;
  end if;
  i = if off then 0 else s;
end Diode;
```

false if $s < 0$

If-equation choosing
equation for v


If-expression

Event Creation – when

when-equations (two kinds: unclocked and clocked)

```
when <conditions> then  
  <equations>  
end when; // un-clocked version
```

```
when clock then  
  <equations>  
end when; // clocked version
```

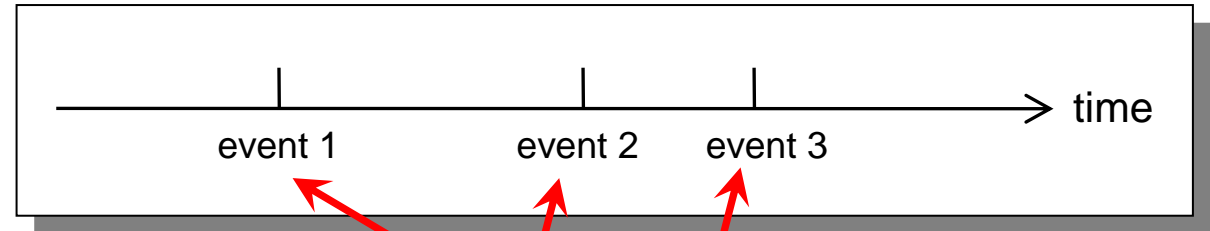

Equations only active at event times

Time event

```
when time >= 10.0 then  
  ...  
end when;
```

Only dependent on time, can be scheduled in advance


State event

```
when sin(x) > 0.5 then  
  ...  
end when;
```

Related to a state. Check for zero-crossing

Generating Repeated Events by unclocked sample

The call `sample(t0, d)` returns true and triggers events at times $t_0 + i \cdot d$, where $i = 0, 1, \dots$

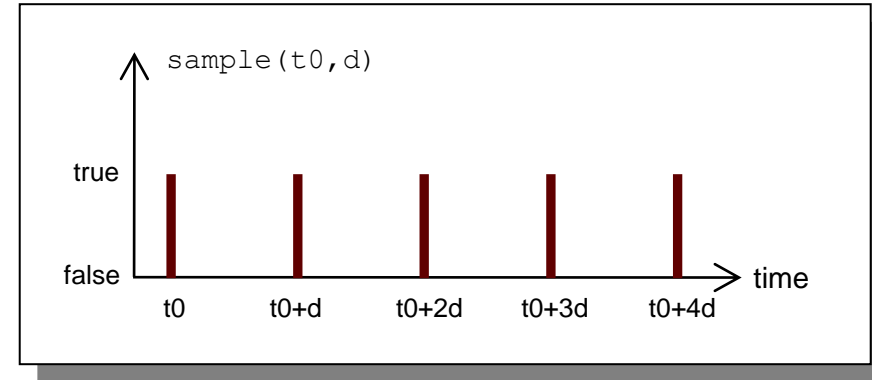


Variables need to be discrete

```
model SamplingClock
  Integer i;
  discrete Real r;
equation
  when sample(2, 0.5) then
    i = pre(i) + 1;
    r = pre(r) + 0.3;
  end when;
end SamplingClock;
```

Creates an event after 2 s, then each 0.5 s


pre(...) takes the previous value before the event.

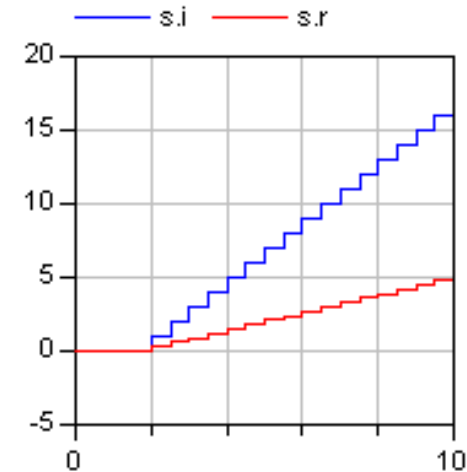

Generating Clock Tick Events using Clock() (clocked models, Modelica 3.3)

- **Clock()** – inferred clock
- **Clock(intervalCounter, resolution)**
 - clock with Integer quotient (rational number) interval
- **Clock(interval)** – clock with a Real value interval
- **Clock(condition, startInterval)**
- **Clock(c=c, solverMethod=solverMethod)** – solver clock


```
class ClockTicks
  // Integer quotient rational number interval clock
  Clock c1 = Clock(3,10);    // ticks: 0, 3/10, 6/10, ..
  // Clock with real value interval between ticks
  Clock c2 = Clock(0.2);    // ticks: 0.0, 0.2, 0.4, ...
end ClockTicks;
```

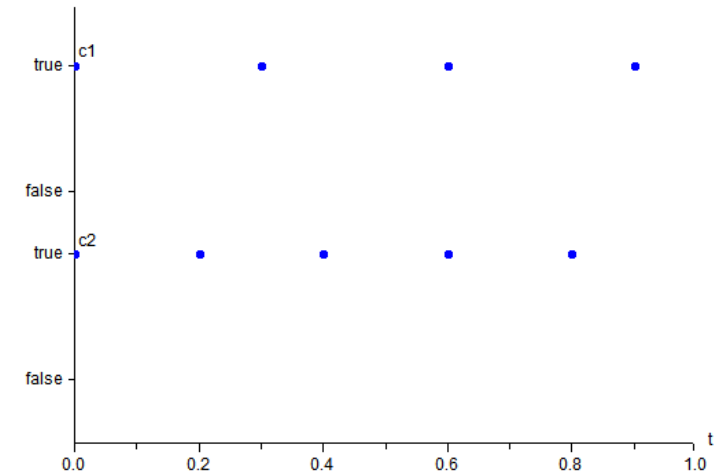

Reinit - Discontinuous Changes

The value of a *continuous-time* state variable can be instantaneously changed by a `reinit`-equation within a `when`-equation

```
model BouncingBall "the bouncing ball model"
  parameter Real g=9.81; //gravitational acc.
  parameter Real c=0.90; //elasticity constant
  Real height(start=10),velocity(start=0);
equation
  der(height) = velocity;
  der(velocity)=-g;
  when height<0 then
    reinit(velocity, -c*velocity);
  end when;
end BouncingBall;
```

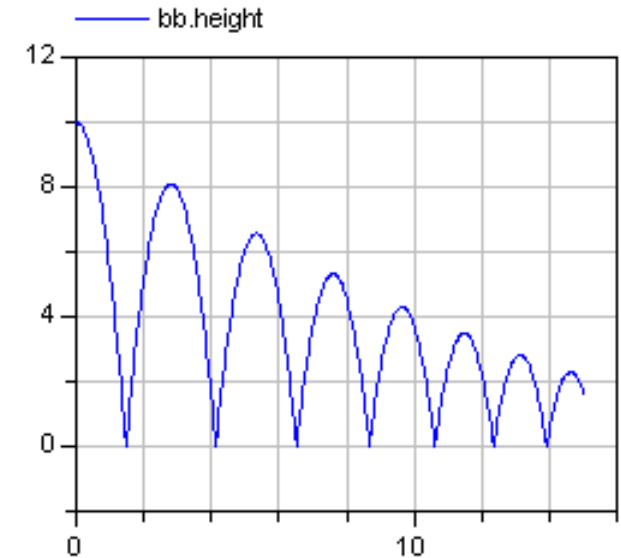


Reinit "assigns"
continuous-time variable
velocity a new value

Initial conditions

Exercise 2.6 – BouncingBall

- Locate the BouncingBall model in one of the hybrid modeling sections of DrModelica (the When-Equations link in Section 2.9), run it, change it slightly, and re-run it.

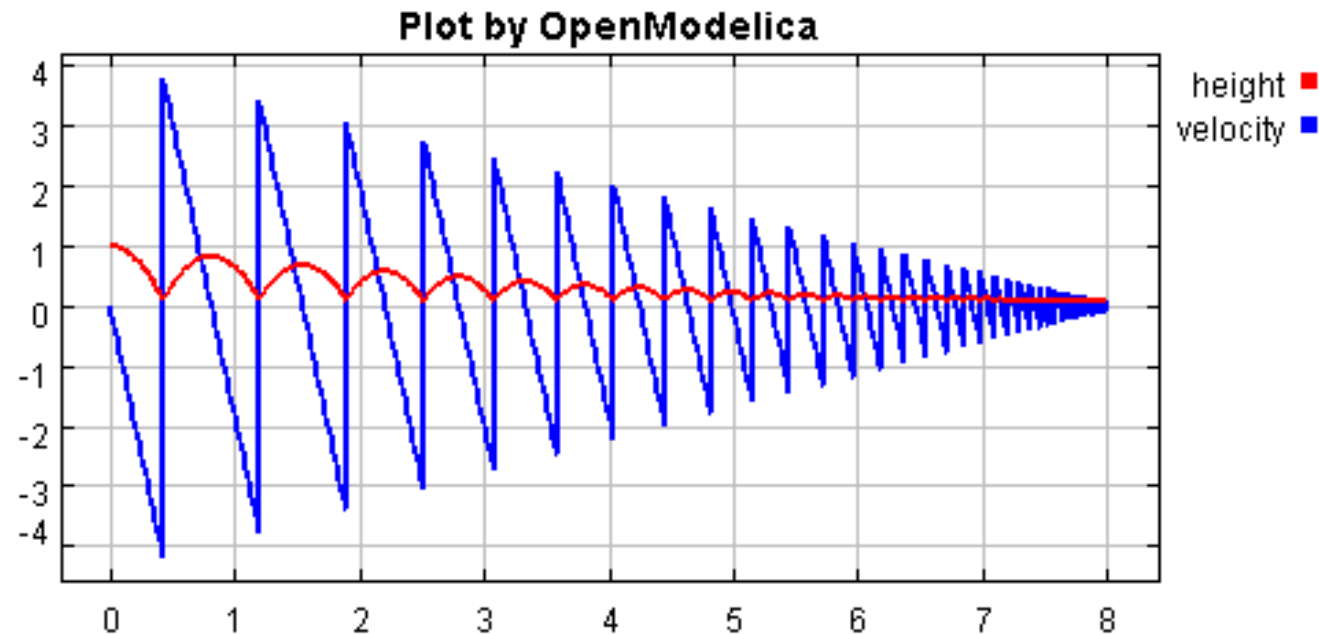

Part IIIc


Clocked Synchronous Models and State Machines

and Applications for Digital Controllers

Control System Applications


Control System

A control system is a device, or set of devices, that manages, commands, directs or regulates the behavior of other devices or systems (wikipedia).

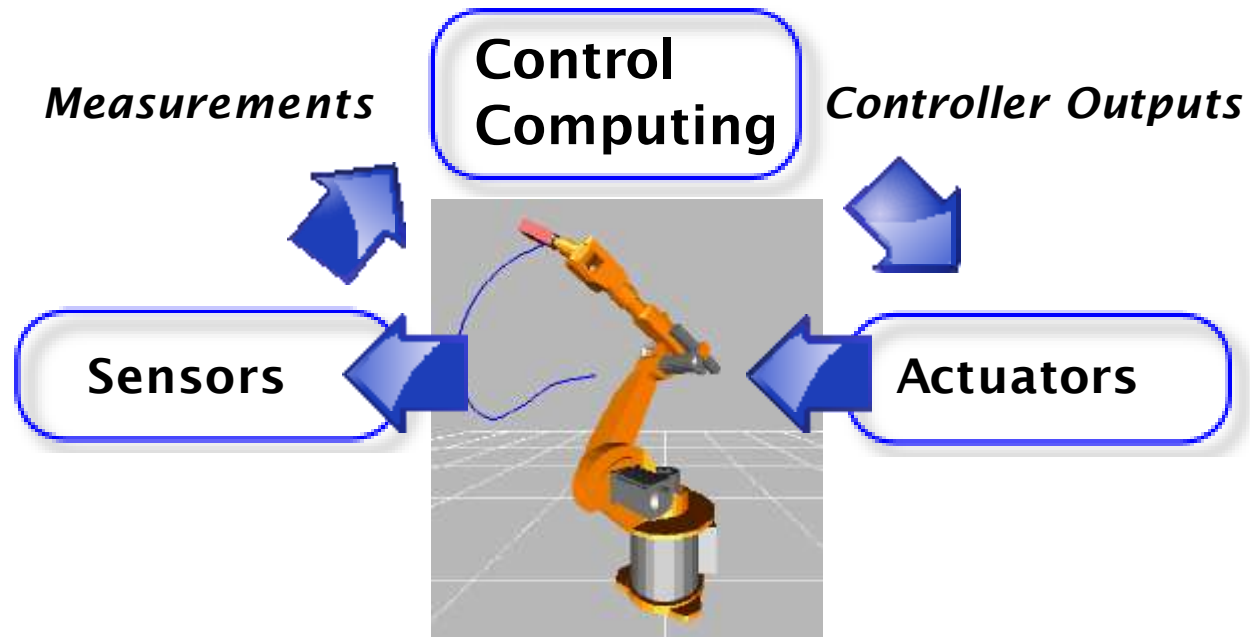

Control Theory Perspective

Feedback Control System

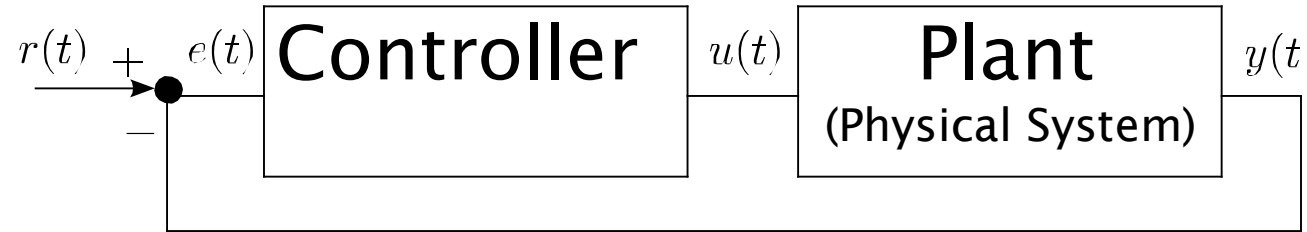


- $r(t)$ reference (setpoint)
- $e(t)$ error
- $y(t)$ measured process variable (plant output)
- $u(t)$ control output variable (plant input)

Usual Objective


Plant output should follow the reference signal.

Embedded Real-Time Control System

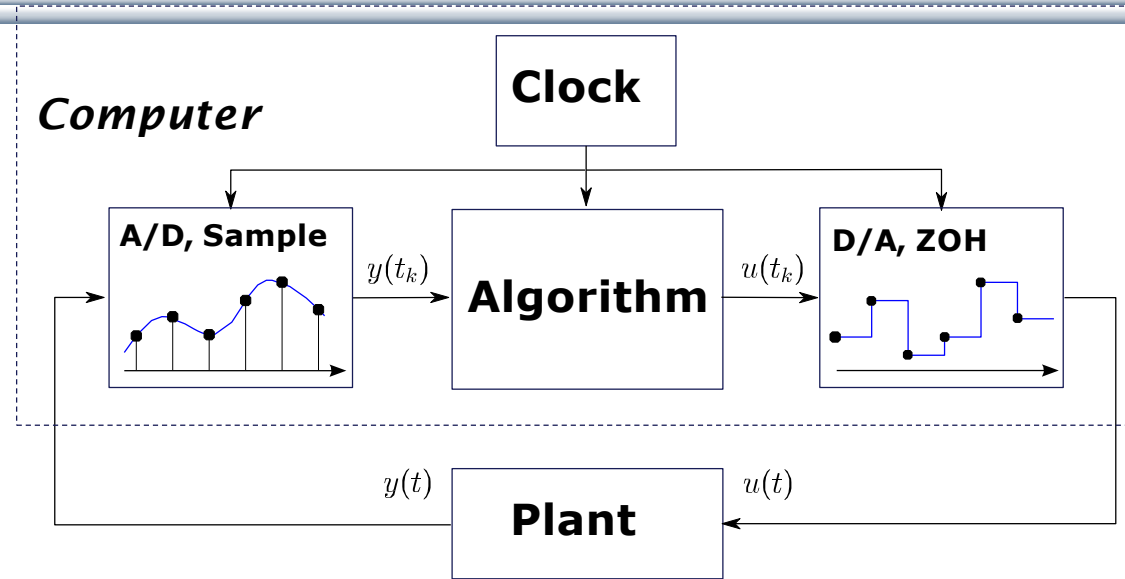

1. **Discrete-time** controller + **continuous-time** plant \equiv *hybrid system* or *sampled-data system*
2. Interface between digital and analog world: Analog to Digital and Digital to Analog Converters (ADC and DAC).
3. ADC \rightarrow Algorithm \rightarrow DAC is synchronous (zero-delay model!)
4. A *clock* controls the *sampling instants*. Usually *periodic sampling*.


Controller with Sampled Data-Systems (unlocked models, using pre() and sample())

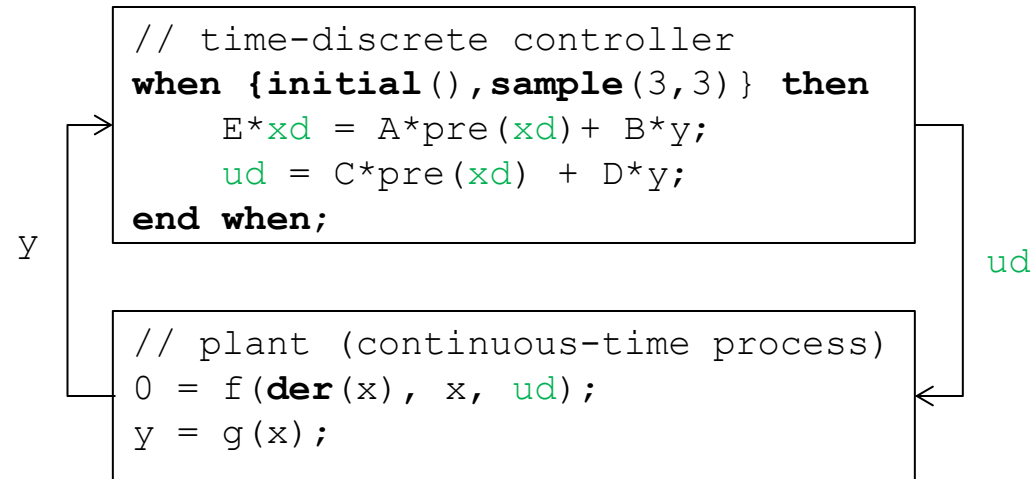


- y is automatically sampled at $t = 3, 6, 9, \dots$;
- xd , u are piecewise-constant variables that change values at sampling events (implicit zero-order hold)
- `initial()` triggers event at initialization ($t=0$)

Controller with Clocked Synchronous Constructs


clocked models using `Clock()`, `previous()`, `hold()` in Modelica 3.3

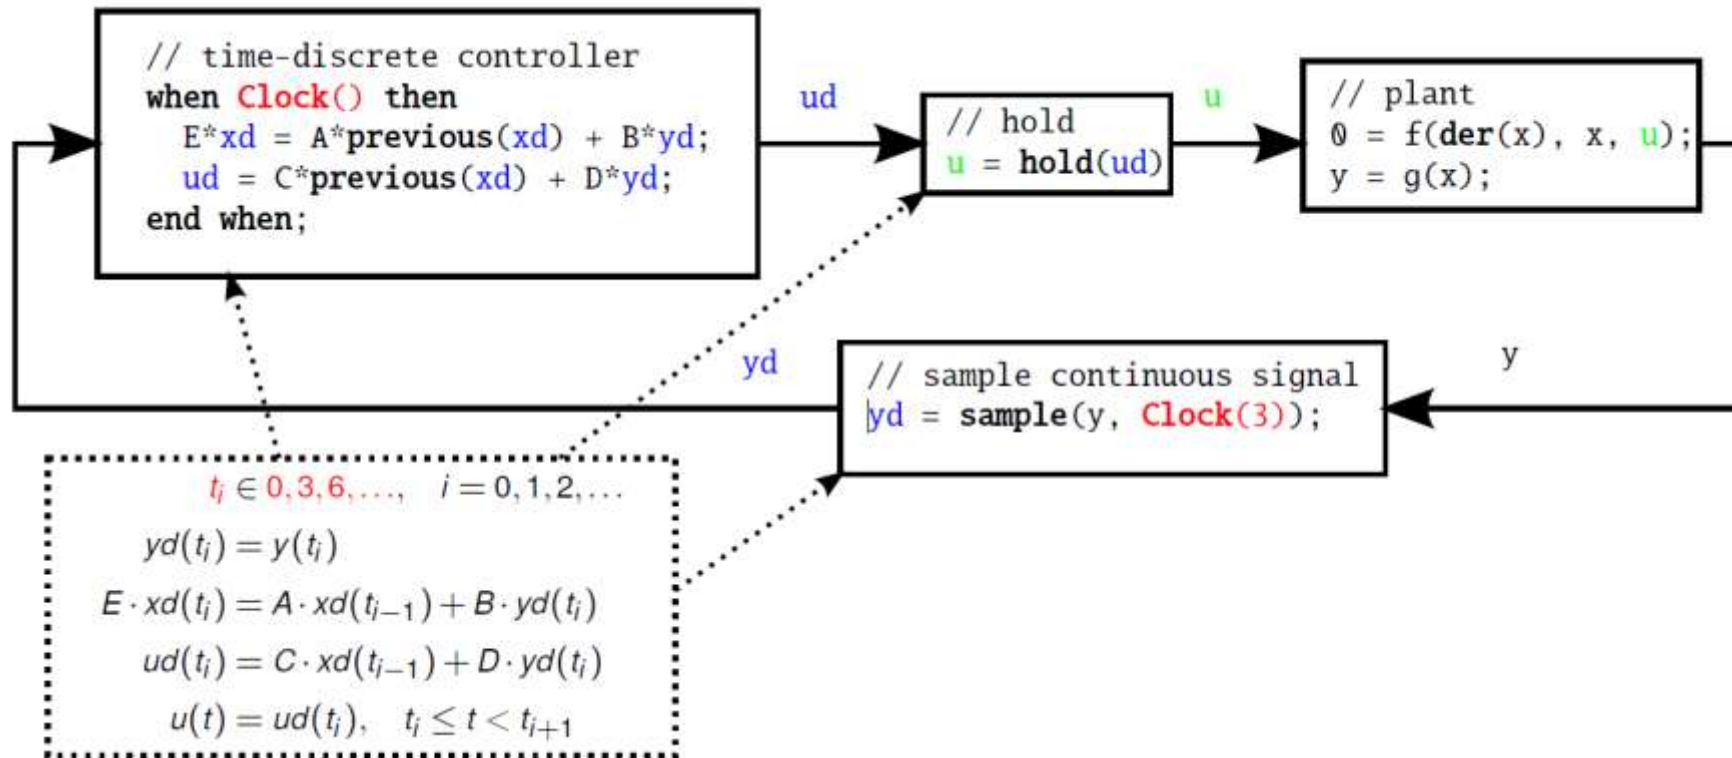



Unlocked Variables in Modelica 3.2

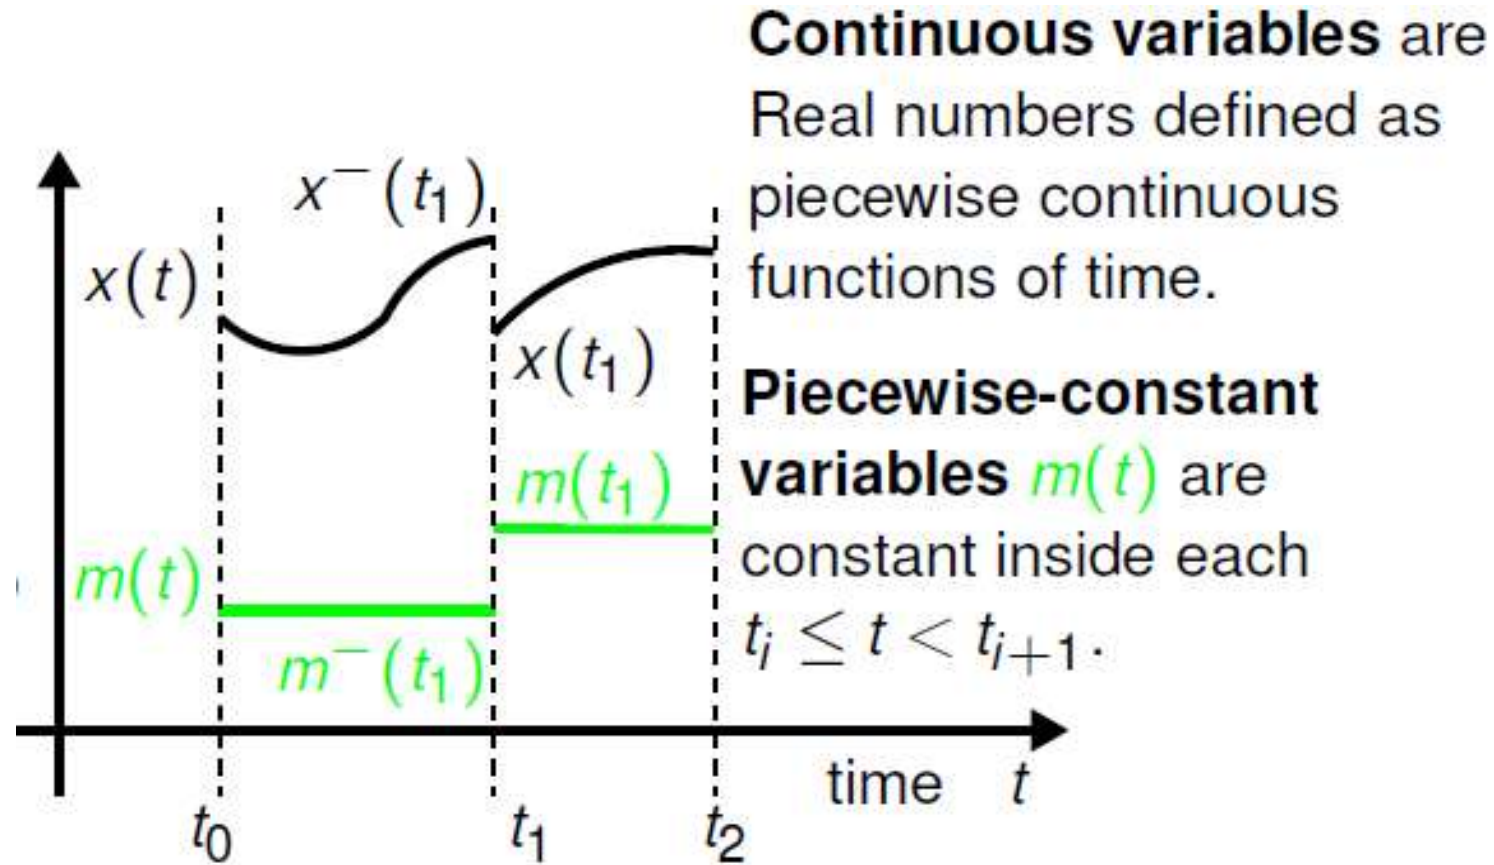


Clock variables (Clock) and Clocked Variables (Real) (in Modelica 3.3)

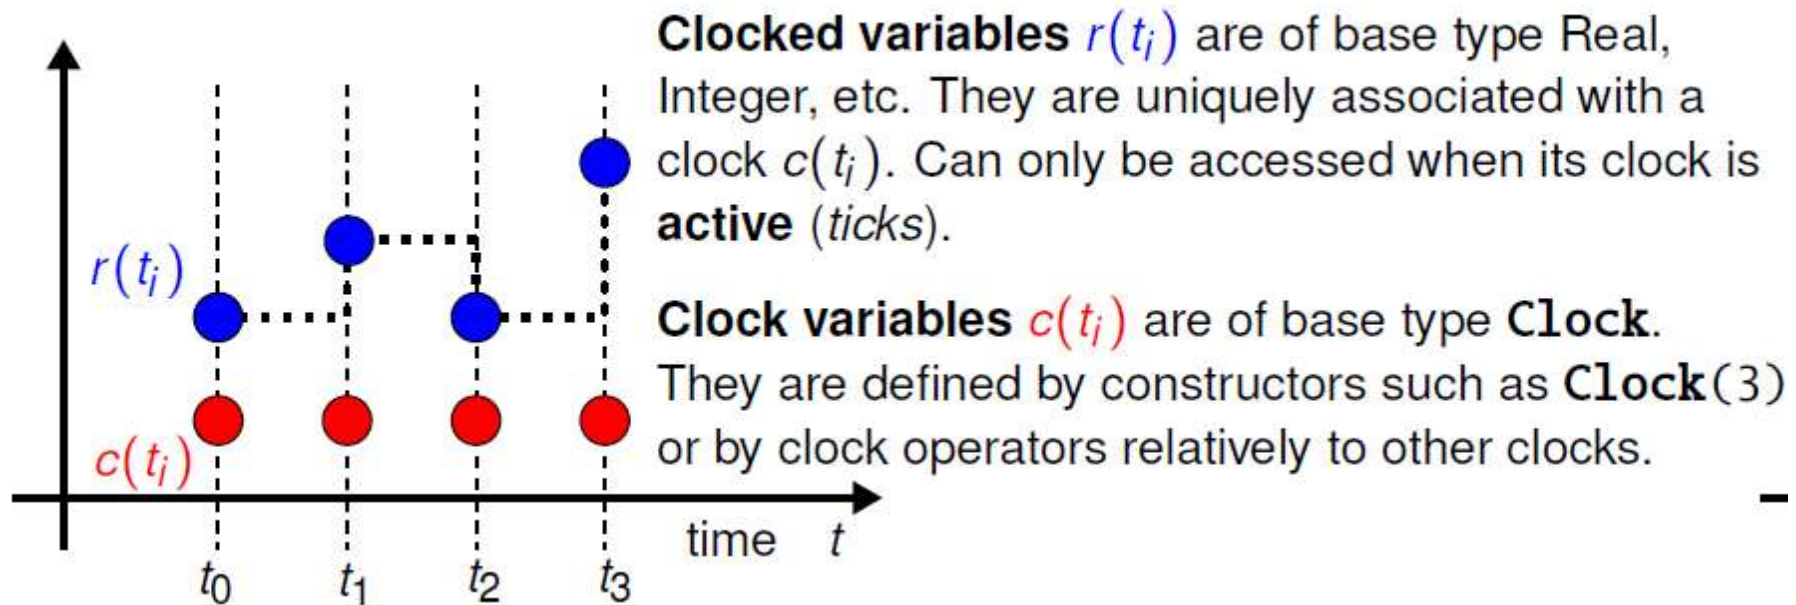

Clocked Synchronous Extension in Modelica 3.3

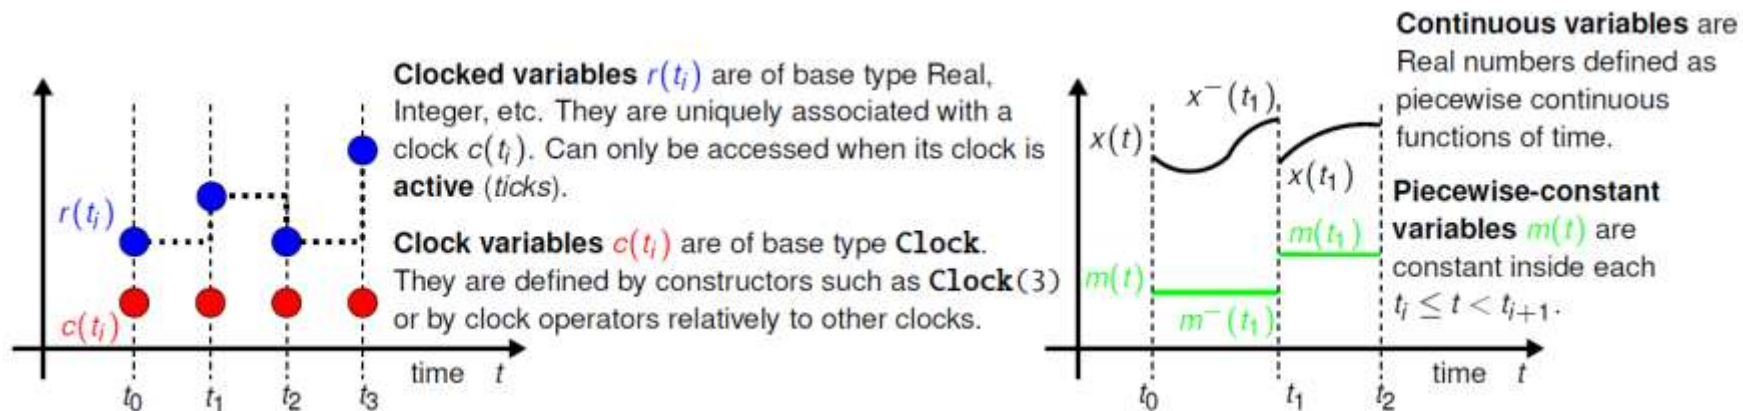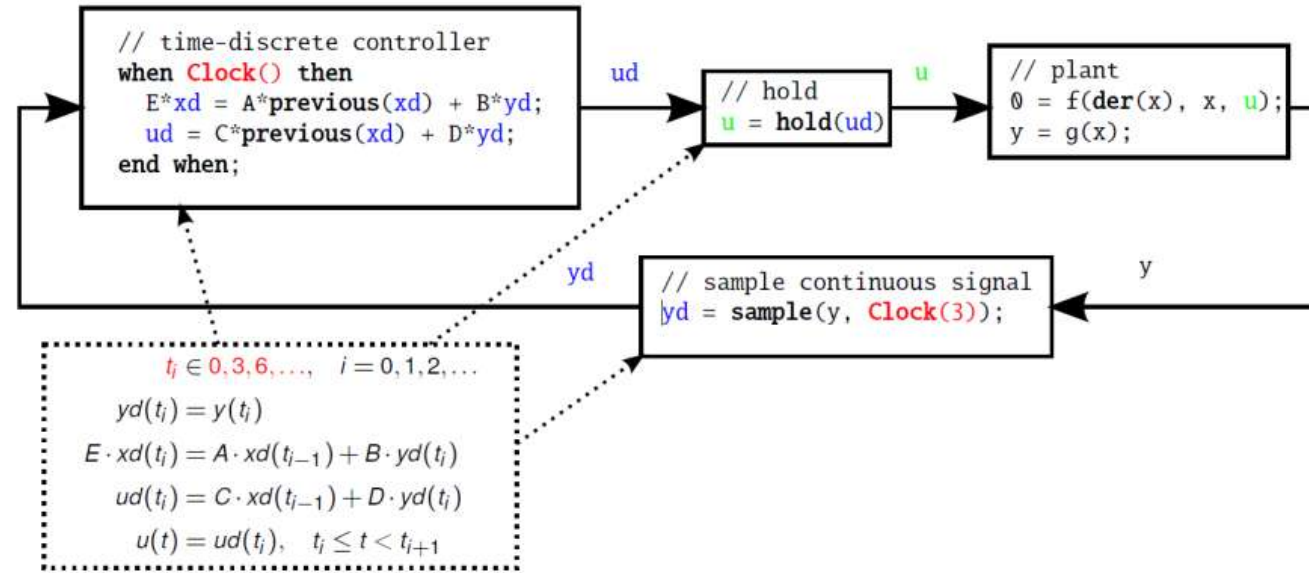

State Machines in Modelica 3.3: Simple Example

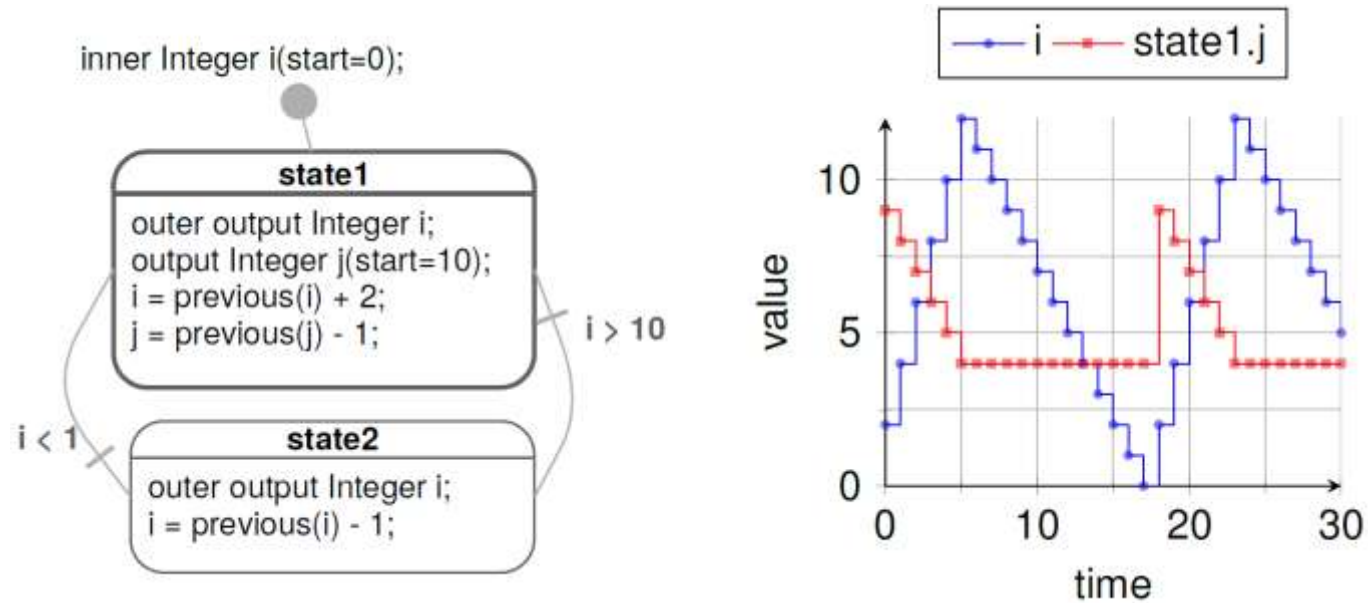


- Equations are active if corresponding *clock* ticks. Defaults to periodic clock with 1.0 s sampling period
- “ i ” is a shared variable, “ j ” is a local variable. Transitions are “*delayed*” and enter states by “*reset*”

Simple Example: Modelica Code


```
model Simple_NoAnnotations "Simple state machine"
  inner Integer i(start=0);
  block State1
    outer output Integer i;
    output Integer j(start=10);
  equation
    i = previous(i) + 2;
    j = previous(j) - 1;
  end State1;
  State1 state1;
  block State2
    outer output Integer i;
  equation
    i = previous(i) - 1;
  end State2;
  State2 state2;
equation
  transition(state1, state2, i > 10, immediate=false);
  transition(state2, state1, i < 1, immediate=false);
  initialState(state1);
end Simple_NoAnnotations;
```

Hierarchical and Parallel Composition of Modelica State Machine Models

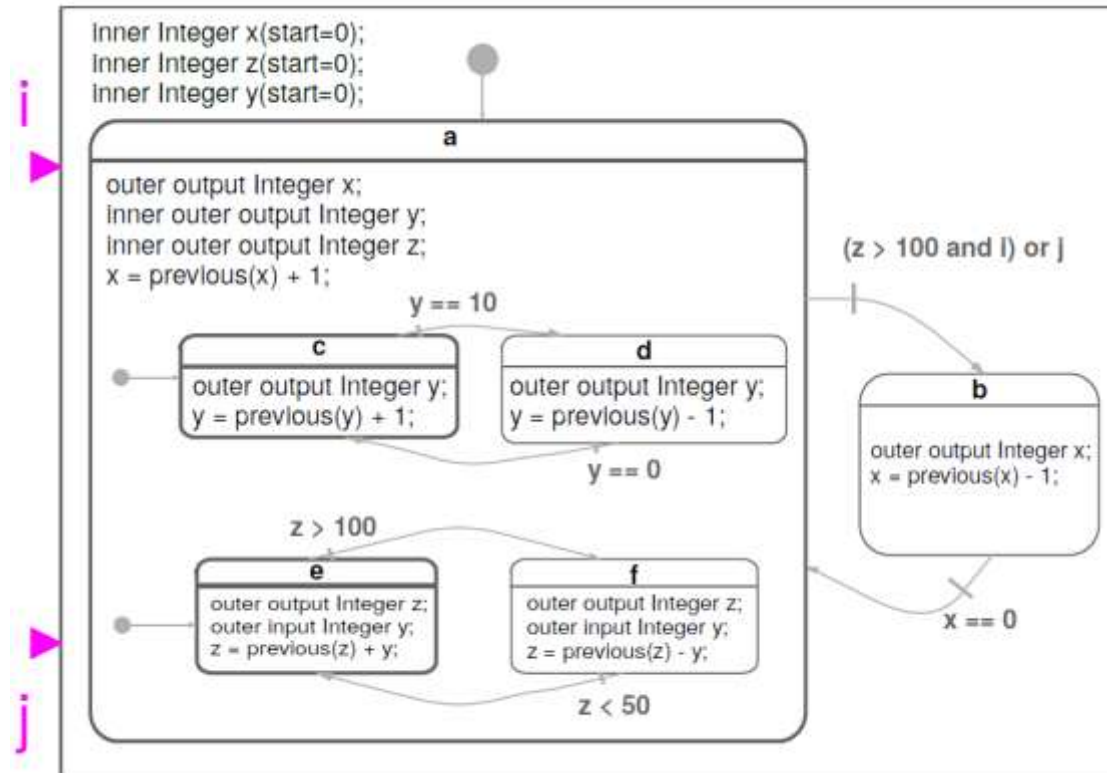

Semantics of Modelica state machines (and example above) inspired by Florence Maraninchi & Yann Rémond's "Mode-Automata" and by Marc Pouzet's Lucid Sychrone 3.0.

Hierarchical and Parallel Composition

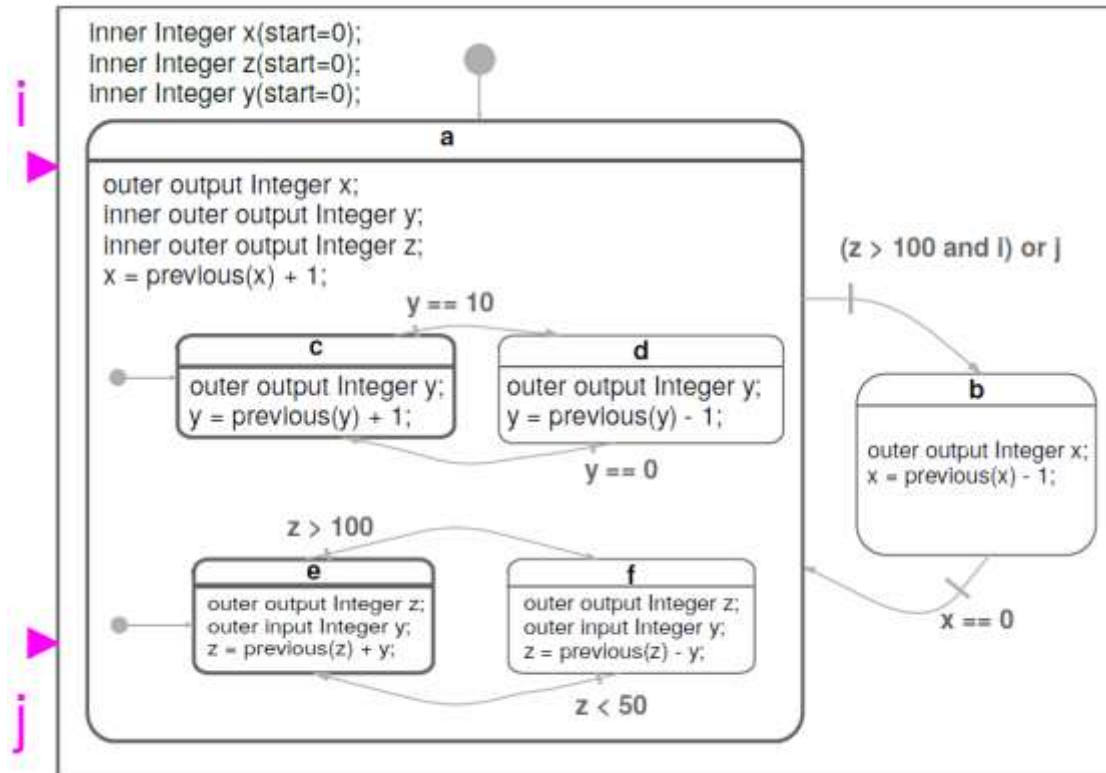


Semantics of Modelica state machines (and example above) inspired by Florence Maraninchi & Yann Rémond's "Mode-Automata" and by Marc Pouzet's Lucid Synchrone 3.0.

Part IV

Components, Connectors and Connections – Modelica Libraries and Graphical Modeling

Software Component Model

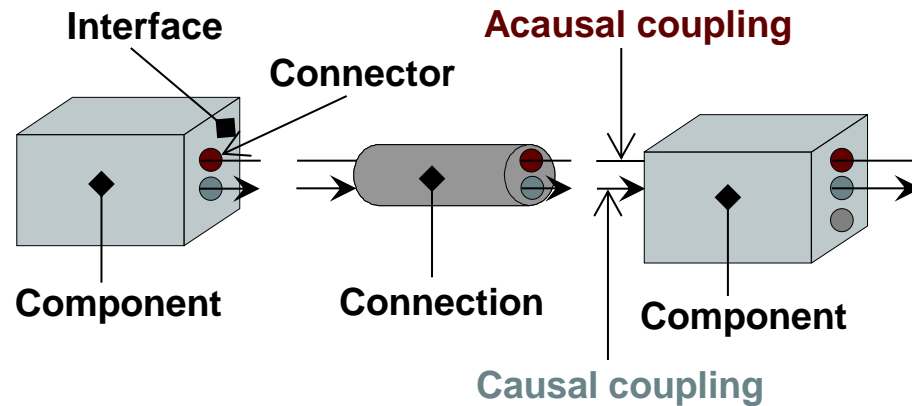





A component class should be defined *independently of the environment*, very essential for *reusability*

A component may internally consist of other components, i.e. *hierarchical modeling*

Complex systems usually consist of large numbers of *connected components*

Connectors and Connector Classes

Connectors are instances of *connector classes*

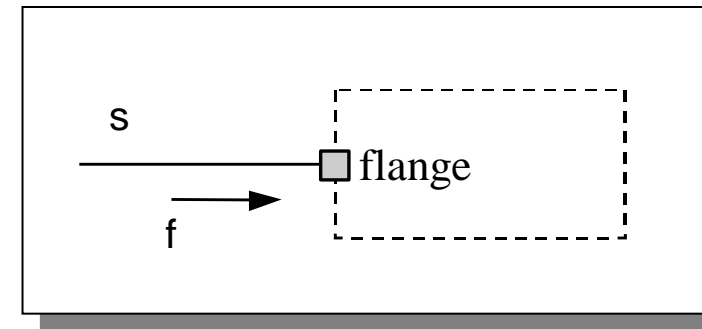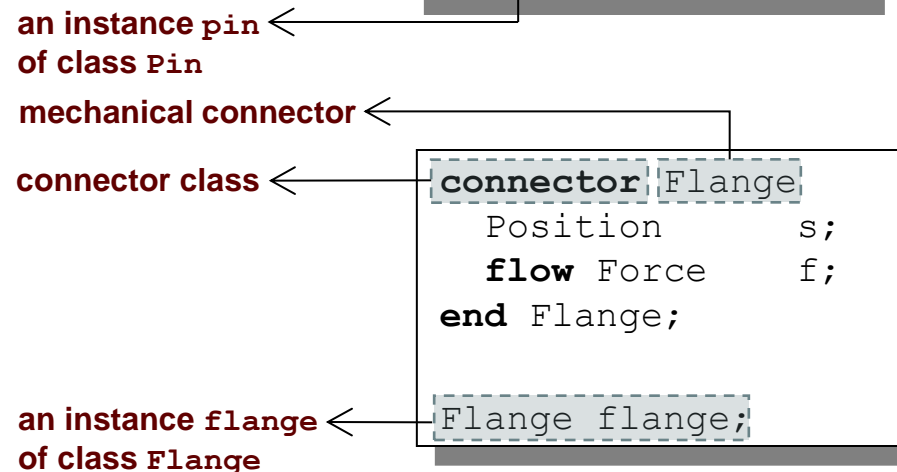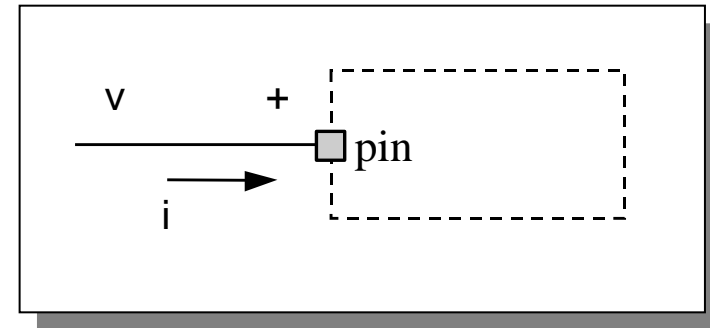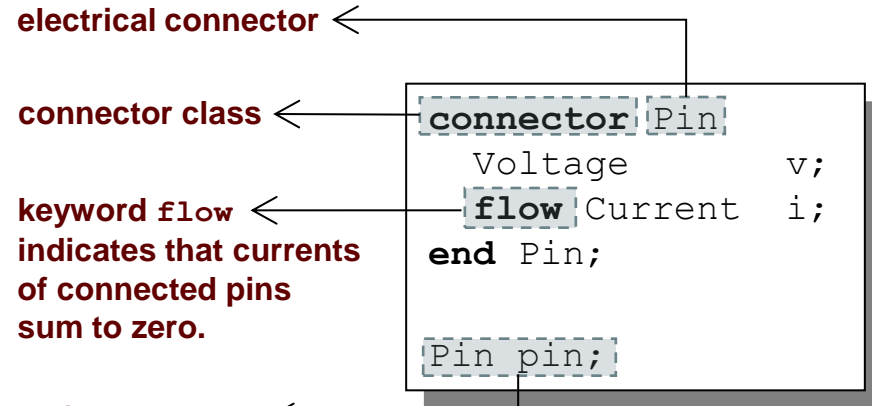

The `flow` prefix

Three possible kinds of variables in connectors:


- *Potential variables* *potential* or energy level
- *Flow variables* represent some kind of flow
- *Stream variables* represent fluid flow in convective transport

Coupling

- *Equality coupling*, for potential variables
- *Sum-to-zero coupling*, for `flow` variables

The value of a `flow` variable is *positive* when the current or the flow is *into* the component

positive flow direction:

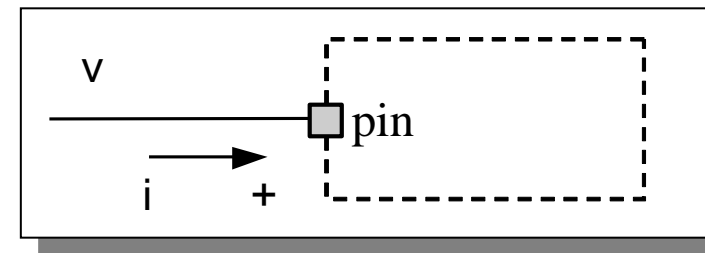

Physical Connector Classes Based on Energy Flow


Domain Type	Potential	Flow	Carrier	Modelica Library
Electrical	Voltage	Current	Charge	Electrical. Analog
Translational	Position	Force	Linear momentum	Mechanical. Translational
Rotational	Angle	Torque	Angular momentum	Mechanical. Rotational
Magnetic	Magnetic potential	Magnetic flux rate	Magnetic flux	Magnetic
Hydraulic	Pressure	Volume flow	Volume	OpenHydraulics
Heat	Temperature	Heat flow	Heat	HeatFlow1D
Chemical	Chemical potential	Particle flow	Particles	Chemical
Pneumatic	Pressure	Mass flow	Air	PneuLibLight

connect-equations

Connections between connectors are realized as *equations* in Modelica

```
connect (connector1,connector2)
```

The two arguments of a `connect`-equation must be references to *connectors*, either to be declared directly *within* the *same class* or be *members* of one of the declared variables in that class

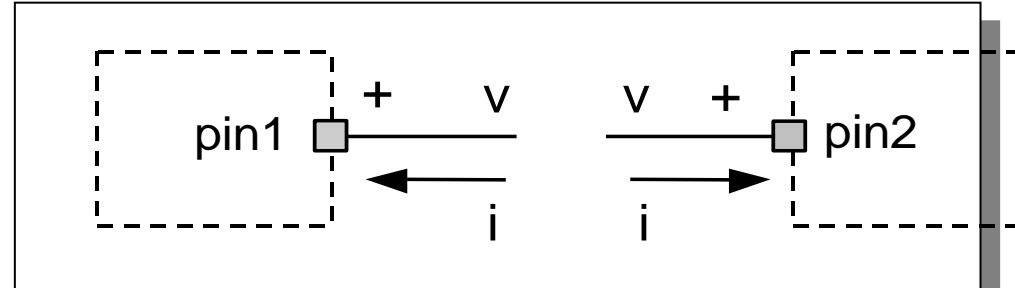

```
Pin pin1, pin2;  
//A connect equation  
//in Modelica:  
connect(pin1, pin2);
```

Corresponds to

```
pin1.v = pin2.v;  
pin1.i + pin2.i = 0;
```

Connection Equations

```
Pin pin1, pin2;  
//A connect equation  
//in Modelica  
connect(pin1, pin2);
```

Corresponds to

```
pin1.v = pin2.v;  
pin1.i + pin2.i = 0;
```

Multiple connections are possible:

```
connect(pin1, pin2); connect(pin1, pin3); ... connect(pin1, pinN);
```

Each primitive connection set of **potential** variables is used to generate equations of the form:


$$V_1 = V_2 = V_3 = \dots V_n$$

Each primitive connection set of **flow** variables is used to generate *sum-to-zero* equations of the form:

$$i_1 + i_2 + \dots (-i_k) + \dots i_n = 0$$

Common Component Structure

The base class `TwoPin` has two connectors `p` and `n` for positive and negative pins respectively

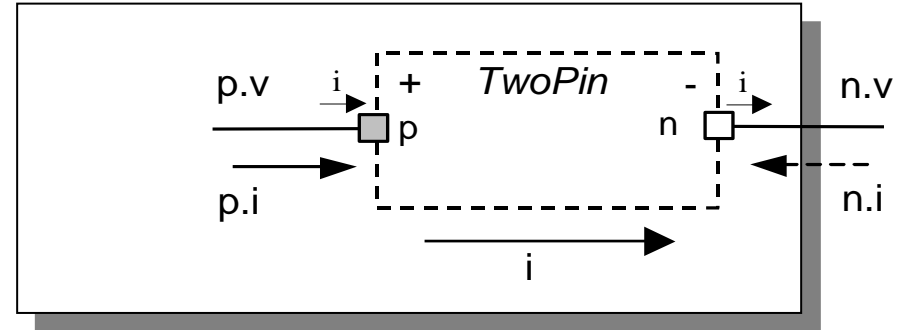

```
partial model TwoPin
  Voltage v
  Current i
  Pin p;
  Pin n;
equation
  v = p.v - n.v;
  0 = p.i + n.i;
  i = p.i;
end TwoPin;
// TwoPin is same as OnePort in
// Modelica.Electrical.Analog.Interfaces
```

```
connector Pin
  Voltage v;
  flow Current i;
end Pin;
```

Annotations:


- partial class (cannot be instantiated) ←
- positive pin ←
- negative pin ←
- electrical connector class →

Electrical Components

```
model Resistor "Ideal electrical resistor"  
  extends TwoPin;  
  parameter Real R;  
equation  
   $R*i = v$ ;  
end Resistor;
```


```
model Inductor "Ideal electrical inductor"  
  extends TwoPin;  
  parameter Real L "Inductance";  
equation  
   $L*\mathit{der}(i) = v$ ;  
end Inductor;
```

```
model Capacitor "Ideal electrical capacitor"  
  extends TwoPin;  
  parameter Real C ;  
equation  
   $i=C*\mathit{der}(v)$ ;  
end Capacitor;
```

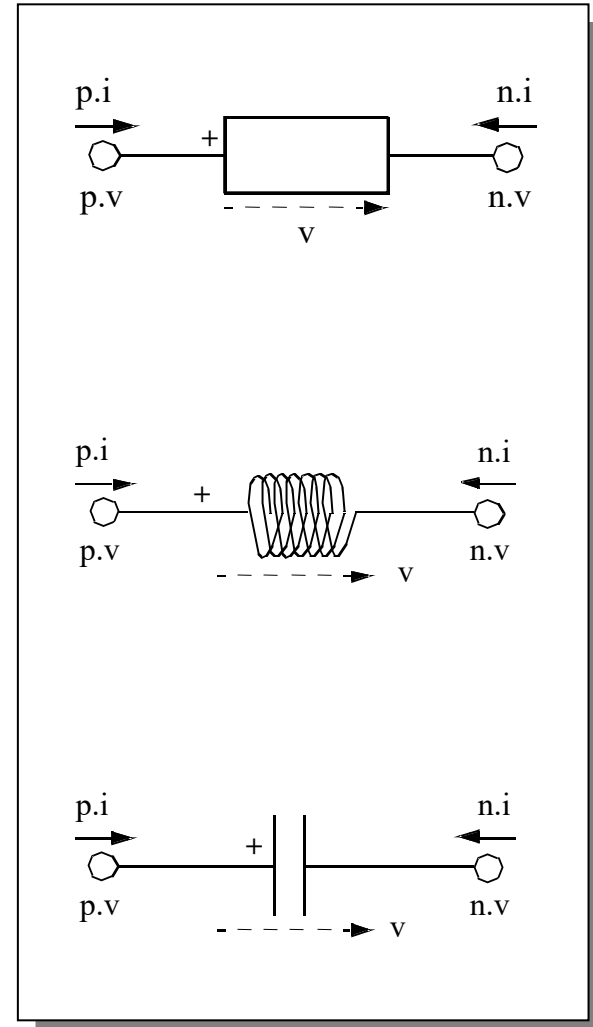


Electrical Components cont'


```
model Source
  extends TwoPin;
  parameter Real A,w;
equation
  v = A*sin(w*time);
end Resistor;
```

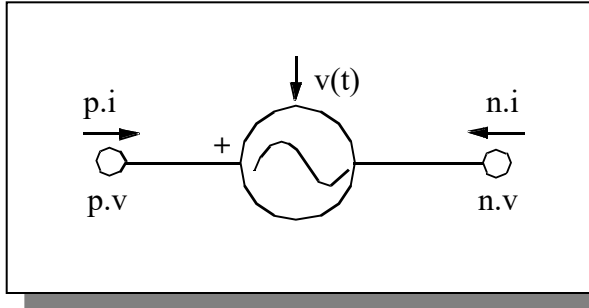

```
model Ground
  Pin p;
equation
  p.v = 0;
end Ground;
```

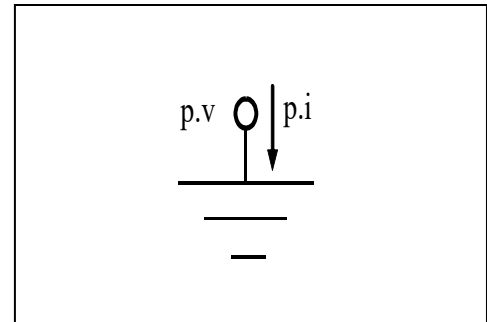

Resistor Circuit

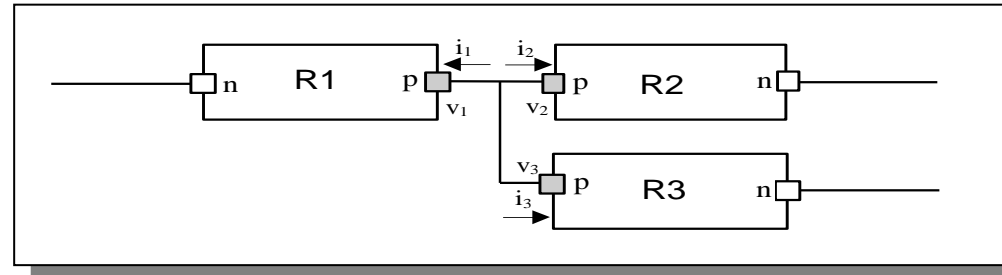

```
model ResistorCircuit
  Resistor R1 (R=100);
  Resistor R2 (R=200);
  Resistor R3 (R=300);
equation
  connect(R1.p, R2.p);
  connect(R1.p, R3.p);
end ResistorCircuit;
```

Corresponds to

```
R1.p.v = R2.p.v;
R1.p.v = R3.p.v;
R1.p.i + R2.p.i + R3.p.i = 0;
```


Modelica Standard Library - Graphical Modeling


- *Modelica Standard Library* (called Modelica) is a standardized predefined package developed by Modelica Association
- It can be used freely for both commercial and non-commercial purposes under the conditions of *The Modelica License*.
- Modelica libraries are available online including documentation and source code from <https://modelica.org/libraries.html>

Modelica Standard Library cont'


The Modelica Standard Library contains components from various application areas, including the following sublibraries:

- **Blocks** Library for basic input/output control blocks
- **Constants** Mathematical constants and constants of nature
- **Electrical** Library for electrical models
- **Icons** Icon definitions
- **Fluid** 1-dim Flow in networks of vessels, pipes, fluid machines, valves, etc.
- **Math** Mathematical functions
- **Magnetic** Magnetic – for magnetic applications
- **Mechanics** Library for mechanical systems
- **Media** Media models for liquids and gases
- **Slunits** Type definitions based on SI units according to ISO 31-1992
- **Stategraph** Hierarchical state machines (analogous to Statecharts)
- **Thermal** Components for thermal systems
- **Utilities** Utility functions especially for scripting


Modelica.Blocks

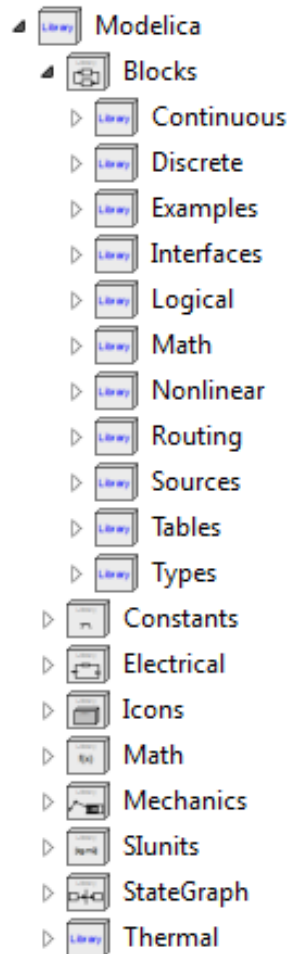

Continuous, discrete, and logical input/output blocks to build block diagrams.

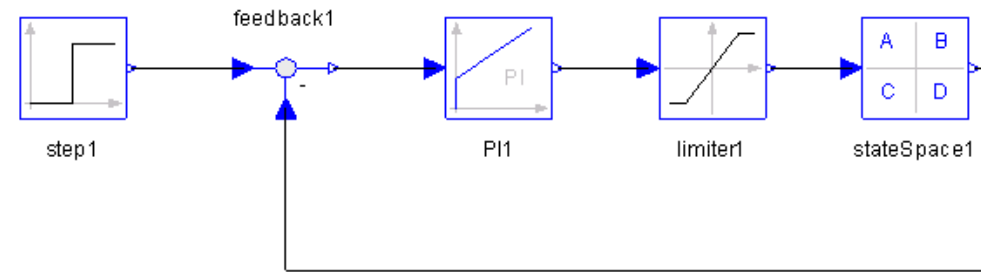


Examples:

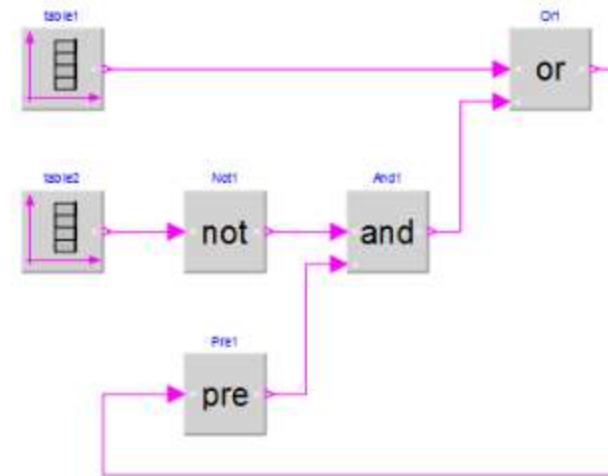

Modelica.Electrical

Electrical components for building analog, digital, and multiphase circuits



Analog



Digital





Machines



MultiPhase



Examples:

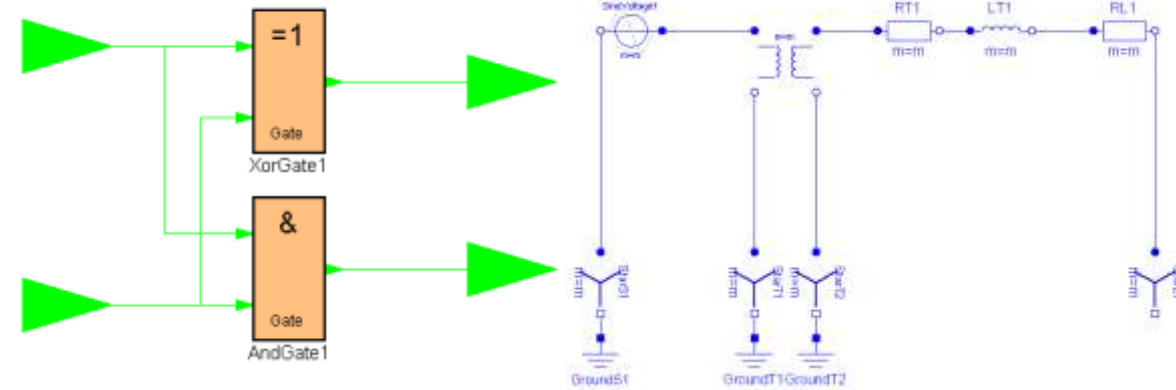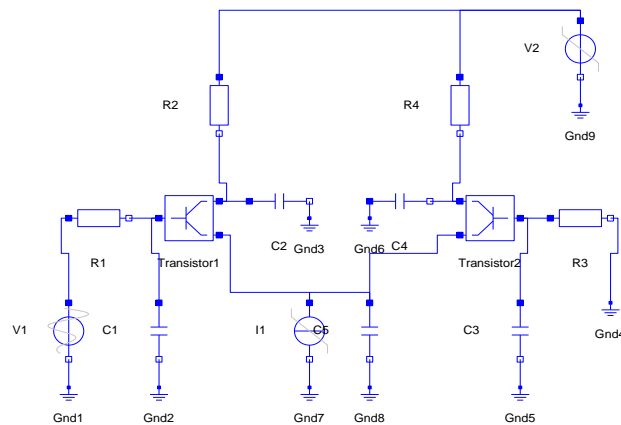



Package containing components for mechanical systems

Subpackages:

- Rotational 1-dimensional rotational mechanical components
- Translational 1-dimensional translational mechanical components
- MultiBody 3-dimensional mechanical components

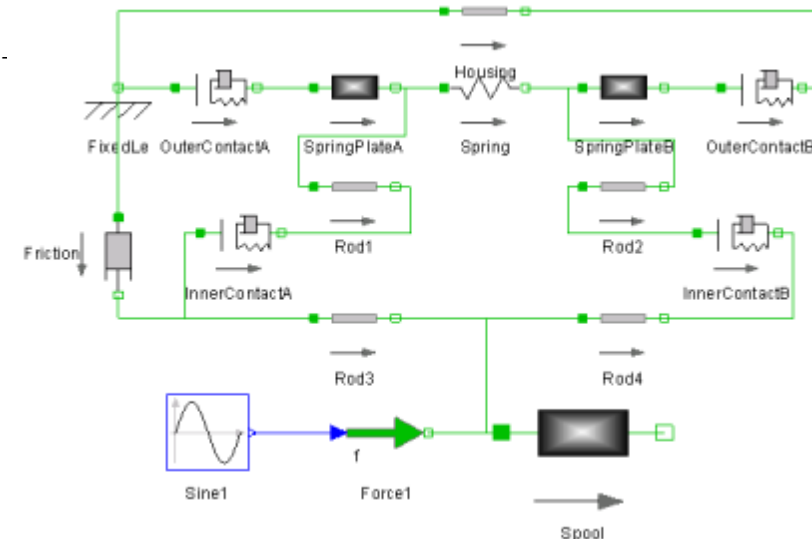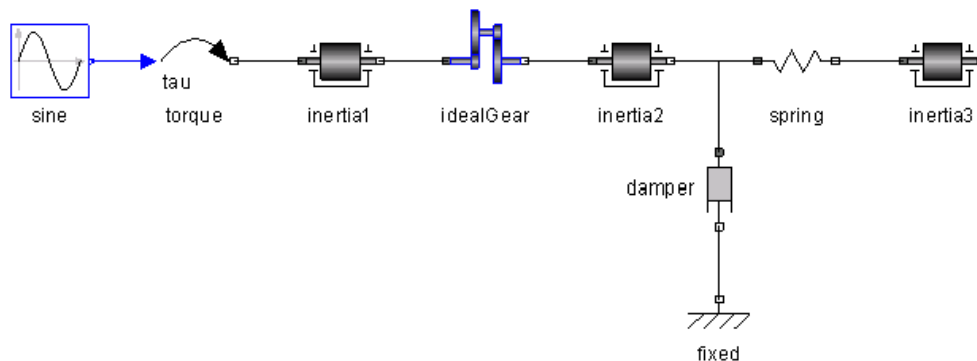

PNlib - An Advanced Petri Net Library for Hybrid Process Modeling

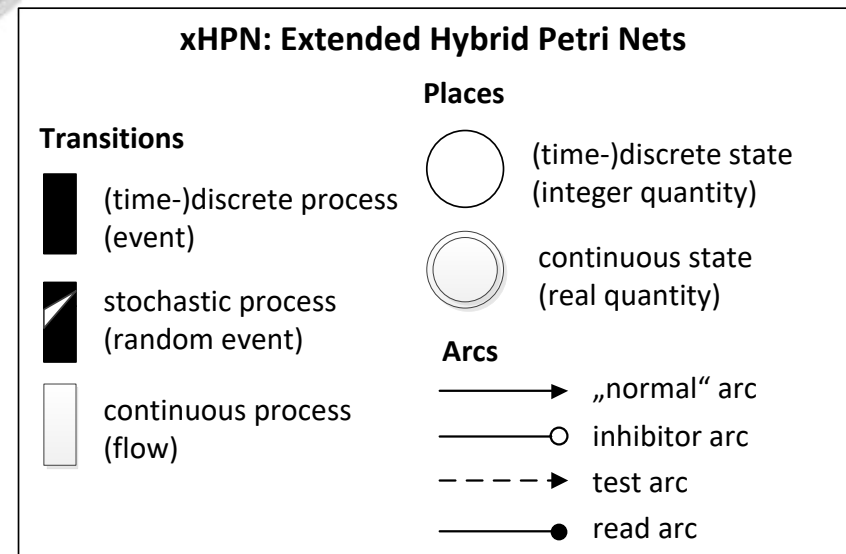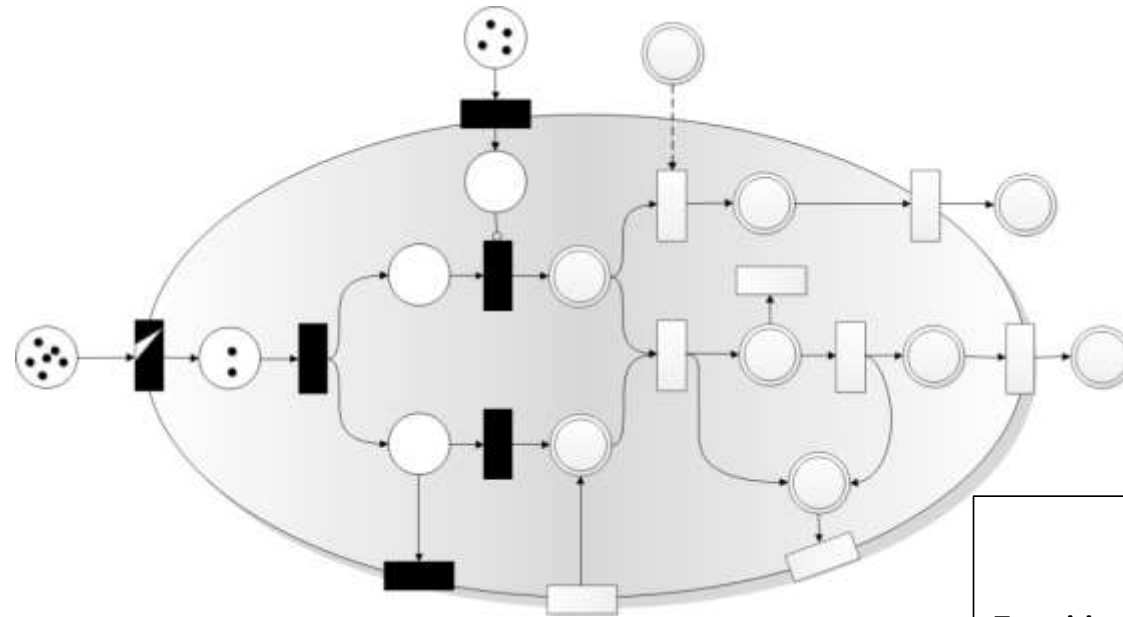



Other Free Libraries

Up to date list at: <https://www.modelica.org/libraries>


- WasteWater Wastewater treatment plants, 2003
- ATPlus Building simulation and control (fuzzy control included), 2005
- MotorCycleDynamics Dynamics and control of motorcycles, 2009
- NeuralNetwork Neural network mathematical models, 2006
- VehicleDynamics Dynamics of vehicle chassis (obsolete), 2003
- SPICElib Some capabilities of electric circuit simulator PSPICE, 2003
- SystemDynamics System dynamics modeling a la J. Forrester, 2007
- BondLib Bond graph modeling of physical systems, 2007
- MultiBondLib Multi bond graph modeling of physical systems, 2007
- ModelicaDEVS DEVS discrete event modeling, 2006
- ExtendedPetriNets Petri net modeling, 2002
- External.Media Library External fluid property computation, 2008
- VirtualLabBuilder Implementation of virtual labs, 2007
- PowerSystems Power systems in transient and steady-state mode
- ...

Install Libraries using OMEdit

- OMEdit can be used to install libraries

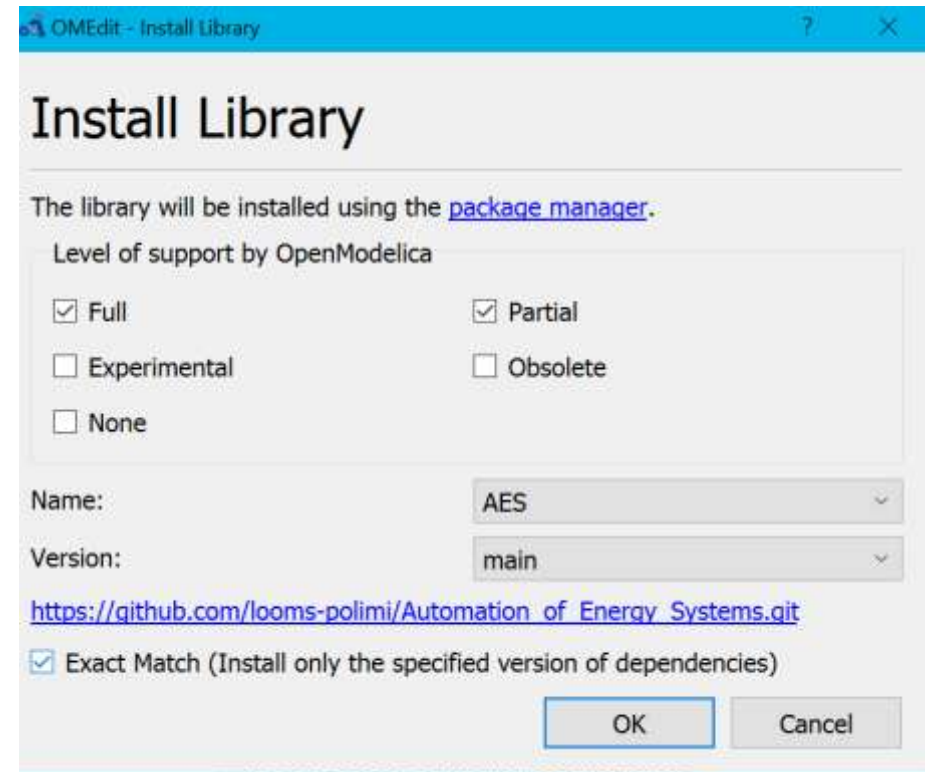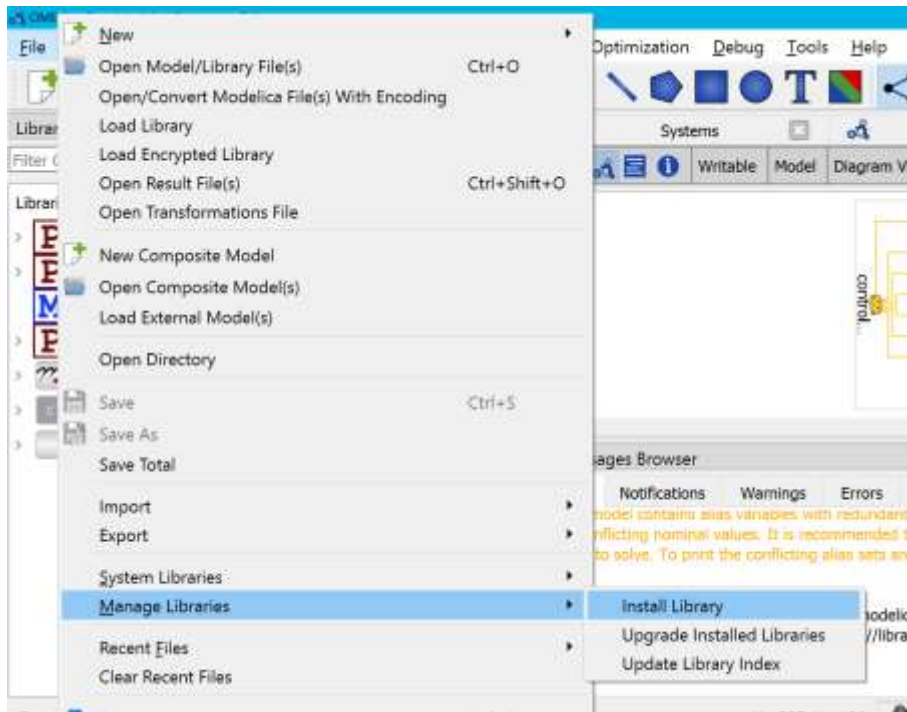

View installed libraries under System Libraries

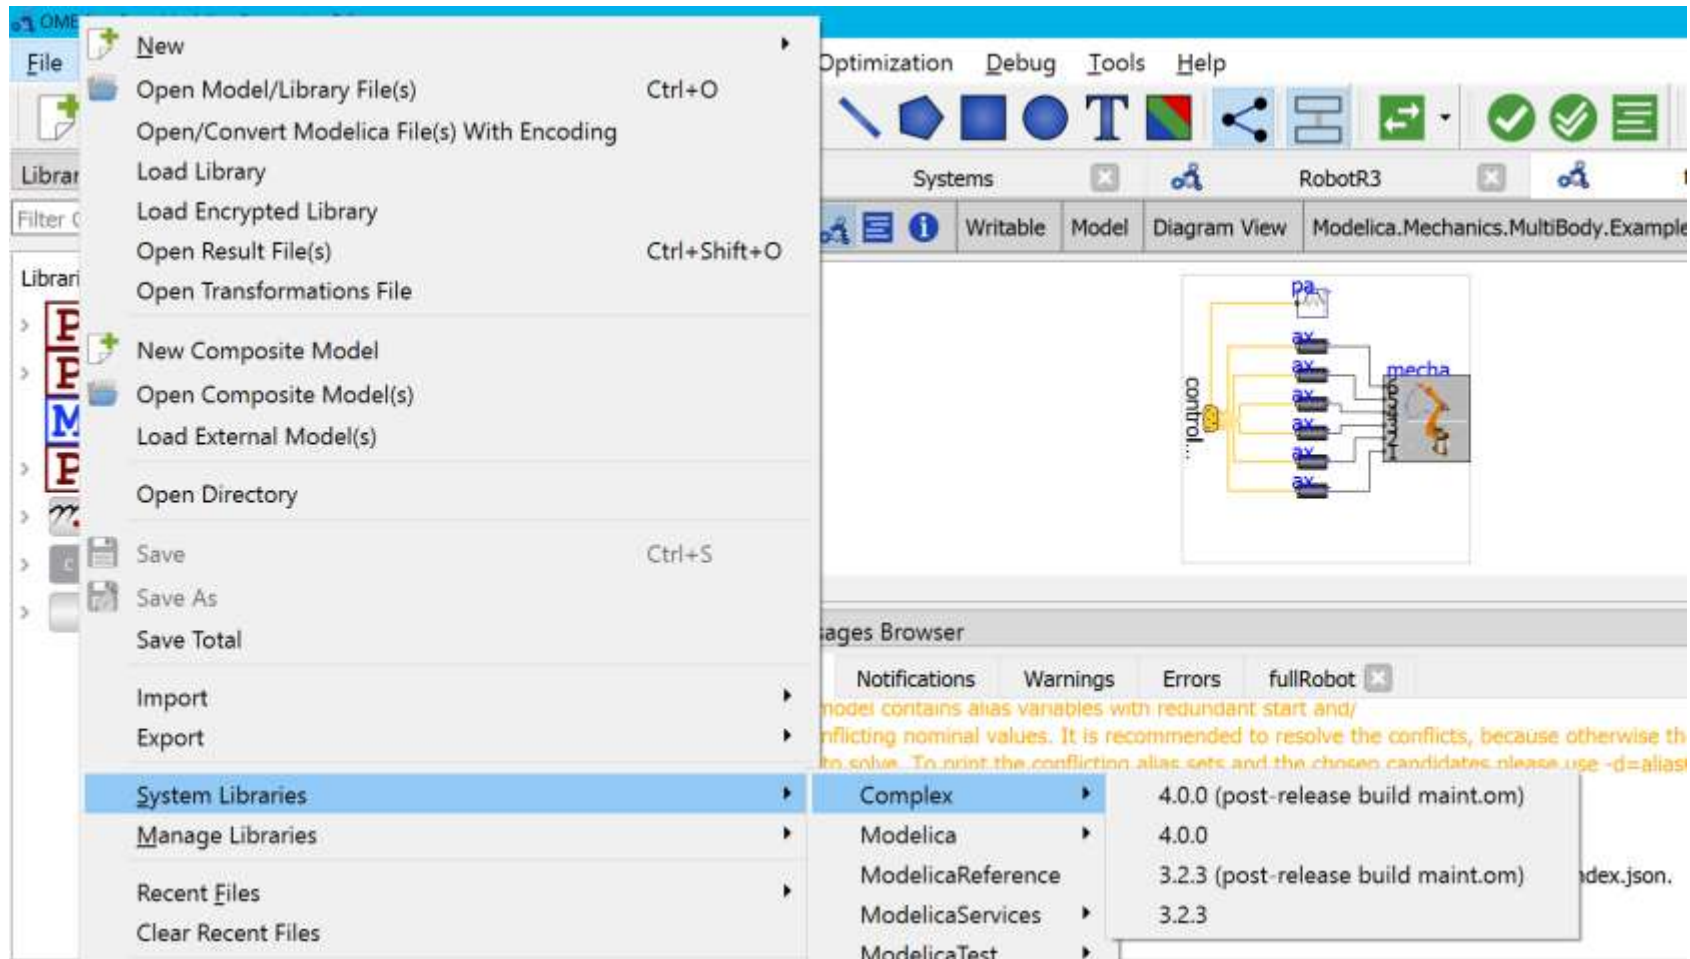

The screenshot shows the OpenModelica software interface. The 'File' menu is open, and 'System Libraries' is selected. A sub-menu displays the following list of installed libraries:

Library Name	Version	Additional Info
Complex	4.0.0	(post-release build maint.om)
Modelica	4.0.0	
ModelicaReference	3.2.3	(post-release build maint.om)
ModelicaServices	3.2.3	
ModelicaTest		

The background shows a mechanical model diagram with a 'control' block and a 'mecha' block. The 'Pages Browser' at the bottom displays a warning message:

Notifications Warnings Errors fullRobot x
nodes contains alias variables with redundant start and/or conflicting nominal values. It is recommended to resolve the conflicts, because otherwise the model will not solve. To print the conflict alias sets and the chosen candidates please use -d=alias


Some Commercial Libraries

Up to date list at: <https://www.modelica.org/libraries>

- Air Conditioning
- Electric Power
- Fuel Cell
- Heat Exchanger
- Hydro Power
- Liquid Cooling
- Thermal Power
- Vapor Cycle
- Battery
- Belts
- Engine
- ...
- Powertrain
- SmartElectricDrives
- VehicleDynamics
- Hydraulics
- Pneumatics
- Engine Dynamics
- Environmental Control
- CombiPlant
- ...
- (there are many more)

Connecting Components from Multiple Domains

- Block domain
- Mechanical domain
- Electrical domain

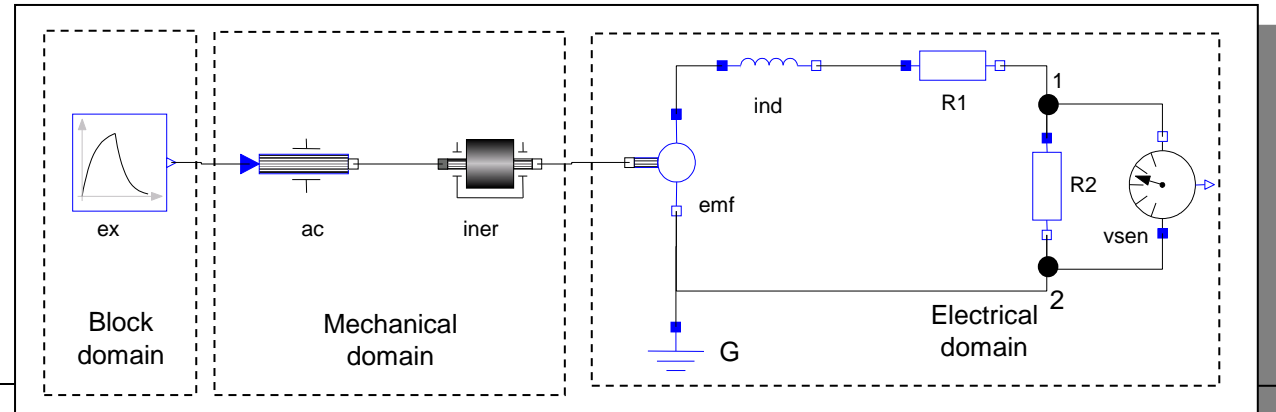

model Generator

```
Modelica.Mechanics.Rotational.Accelerate ac;  
Modelica.Mechanics.Rotational.Inertia iner;  
Modelica.Electrical.Analog.Basic.EMF emf(k=-1);  
Modelica.Electrical.Analog.Basic.Inductor ind(L=0.1);  
Modelica.Electrical.Analog.Basic.Resistor R1,R2;  
Modelica.Electrical.Analog.Basic.Ground G;  
Modelica.Electrical.Analog.Sensors.VoltageSensor vsens;  
Modelica.Blocks.Sources.Exponentials ex(riseTime={2},riseTimeConst={1});
```

equation


```
connect(ac.flange_b, iner.flange_a); connect(iner.flange_b, emf.flange_b);  
connect(emf.p, ind.p); connect(ind.n, R1.p); connect(emf.n, G.p);  
connect(emf.n, R2.n); connect(R1.n, R2.p); connect(R2.p, vsens.n);  
connect(R2.n, vsens.p); connect(ex.outPort, ac.inPort);
```

```
end Generator;
```

DCMotor Model Multi-Domain (Electro-Mechanical)

A DC motor can be thought of as an electrical circuit which also contains an electromechanical component.

```
model DCMotor
  Resistor R(R=100);
  Inductor L(L=100);
  VsourceDC DC(f=10);
  Ground G;
  EMF emf(k=10,J=10, b=2);
  Inertia load;
equation
  connect (DC.p,R.n);
  connect (R.p,L.n);
  connect (L.p, emf.n);
  connect (emf.p, DC.n);
  connect (DC.n,G.p);
  connect (emf.flange,load.flange);
end DCMotor;
```

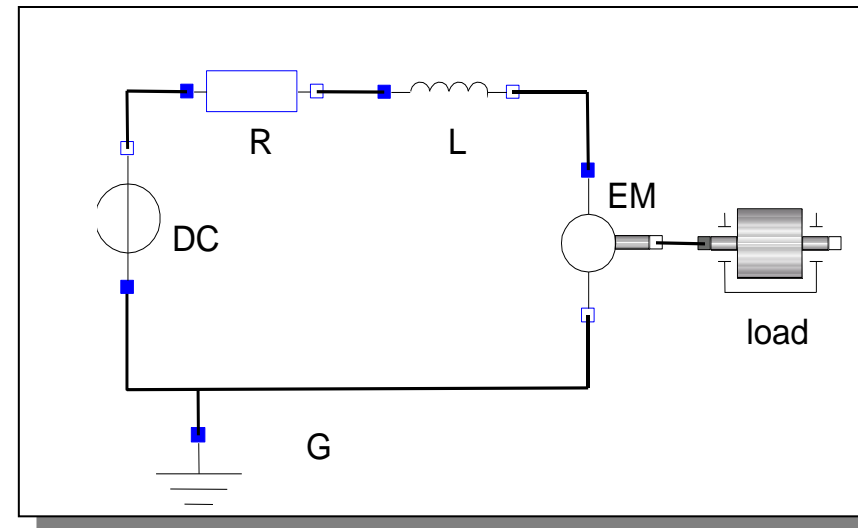

Part IV

Sensitivity Analysis

using
OpenModelica

Introduction to Sensitivity Analysis

- Sensitivity of nonlinear systems in the form of ODEs
 - Undergo noticeable **dynamic changes** in response to **small perturbations** in the parameters.
- OO-languages (Modelica)
 - Systematic treatment of the problem
 - Clear, unambiguous access to parameters, variables and simulation configuration.
 - Reusable frameworks to manipulate models as black boxes.
- Varied options to use internal knowledge about model structure




Approaches to Sensitivity Analysis

- **Individual** analysis:
 - **One parameter** perturbed at a time
 - Ignores combinations of perturbations
- **Simultaneous** analysis:
 - All possible combinations not feasible
 - Would give combinatorial explosion of parameter settings
 - Find “**optimal**” **combinations** of perturbations
 - “Smallest simultaneous perturbations that produce largest deviations”
 - Typically: **optimization-based** strategies


OMSens – Multi-Parameter Sensitivity Analysis

- Individual and simultaneous multi-parameter analysis
- Optimization-based simultaneous analysis
- Robust derivative free optimizer

Heatmap visualization

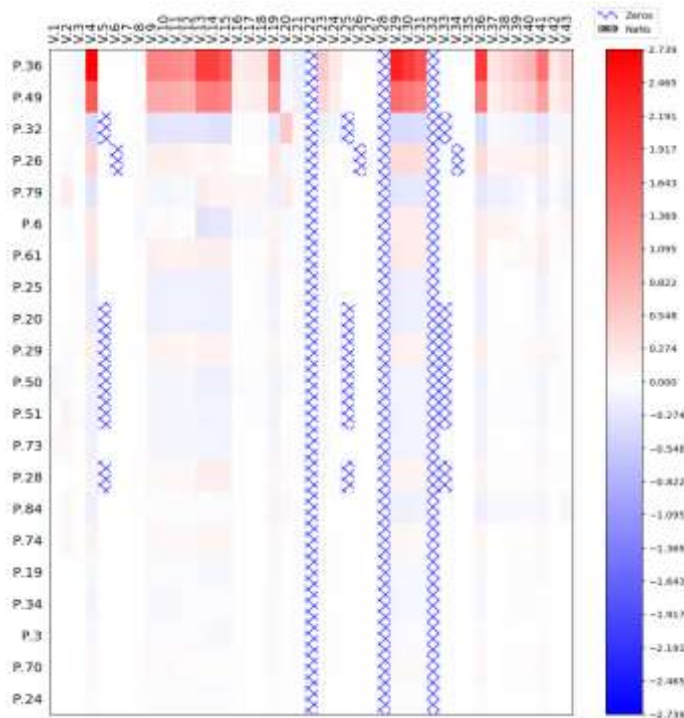

Tool architecture

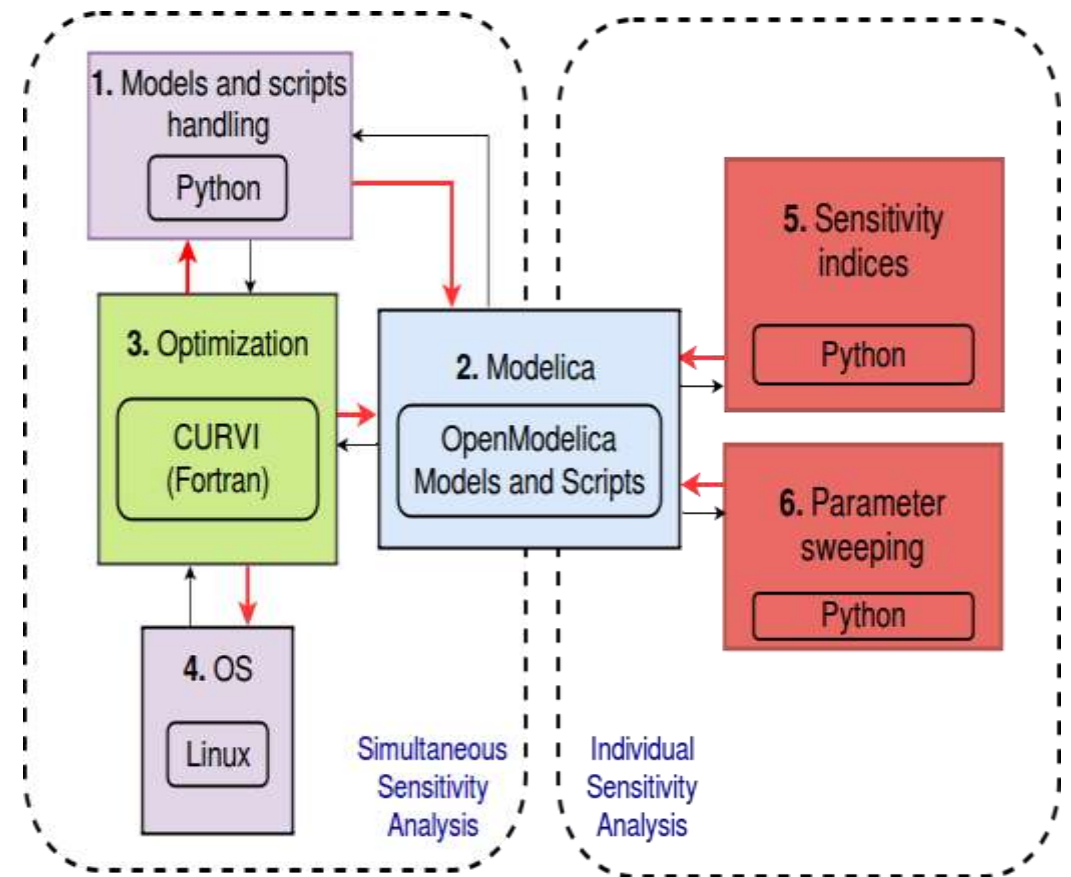

CURVIF: robust derivative-free optimization algorithm


- The CURVI family
 - Curvilinear search approach
- Three versions: CURVIF, CURVIG, CURVIH
 - Function values, function values plus Gradients, and the latter plus Hessians.
 - Globally convergent
 - In general uses **fewer evaluations** than other algorithms
- CURVIF: the flavor adopted for OMSens
 - Trade-off: favor **robustness**, sacrifice some efficiency
 - Derivative-free methods can either be robust - at the cost of using many function evaluations, e.g. direct searches - or may present convergence problems

LotkaVolterra – A Simple Model to be Used for Sensitivity Analysis Exercises

```
model LotkaVolterra "This is the typical equation-oriented model"  
  parameter Real alpha=0.1 "Reproduction rate of prey";  
  parameter Real beta=0.02 "Mortality rate of predator per prey";  
  parameter Real gamma=0.4 "Mortality rate of predator";  
  parameter Real delta=0.02 "Reproduction rate of predator per prey";  
  parameter Real prey_pop_init=10 "Initial prey population";  
  parameter Real pred_pop_init=10 "Initial predator population";  
  Real prey_pop(start=prey_pop_init) "Prey population";  
  Real pred_pop(start=pred_pop_init) "Predator population";  
initial equation  
  prey_pop = prey_pop_init;  
  pred_pop = pred_pop_init;  
equation  
  der(prey_pop) = prey_pop*(alpha-beta*pred_pop);  
  der(pred_pop) = pred_pop*(delta*prey_pop-gamma);  
end LotkaVolterra ;
```


OMSens Exercise – Locate Python

Select Analysis type – OpenModelica 1.16.0 or later

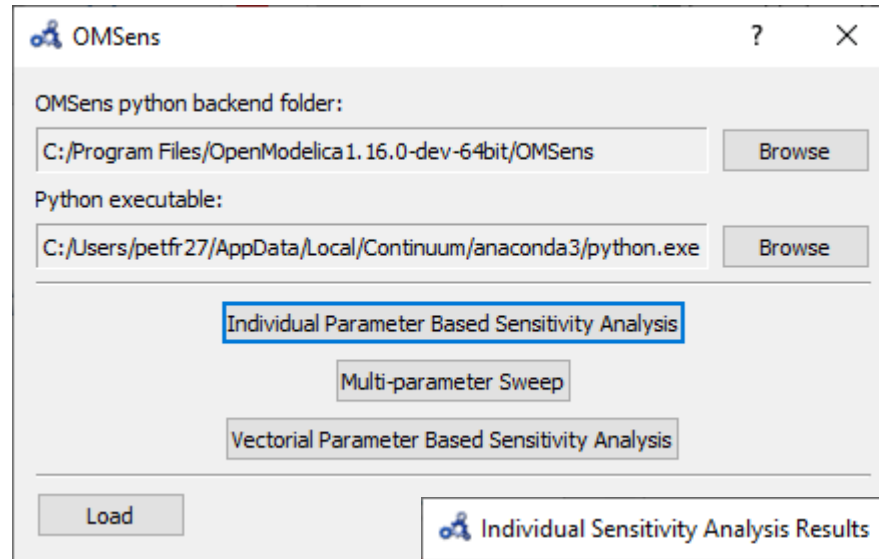

Installation instructions:


<https://github.com/OpenModelica/OMSens#omsens>

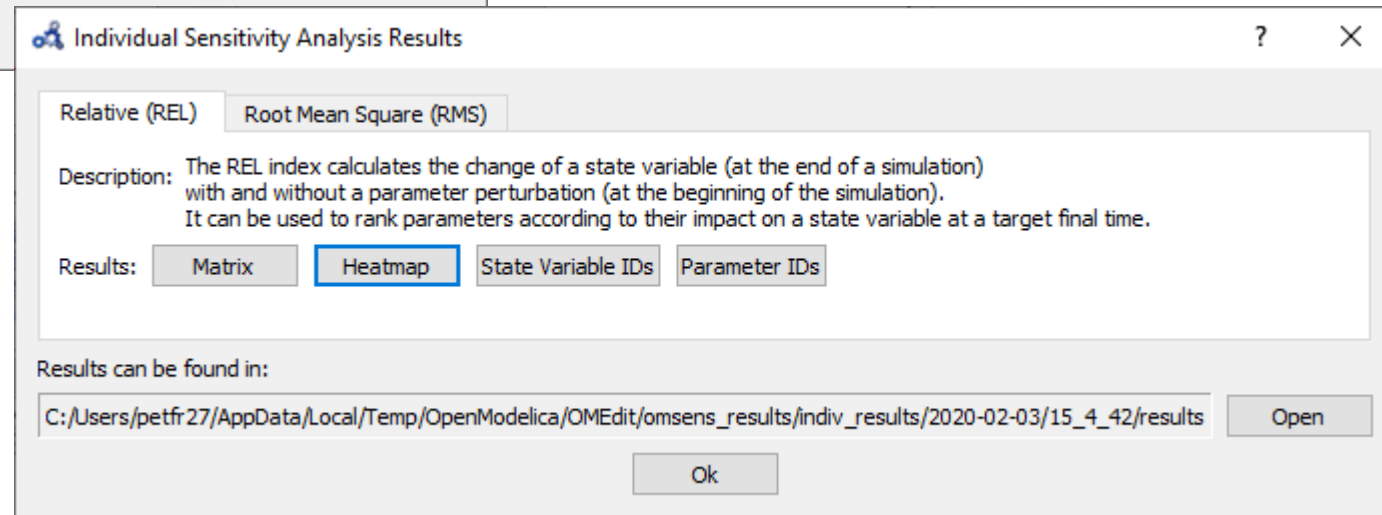


OMSens Exercise –results from individual analysis

More info in the file:

OMSens Example_Exercise_ Lotka-Volterra.pdf

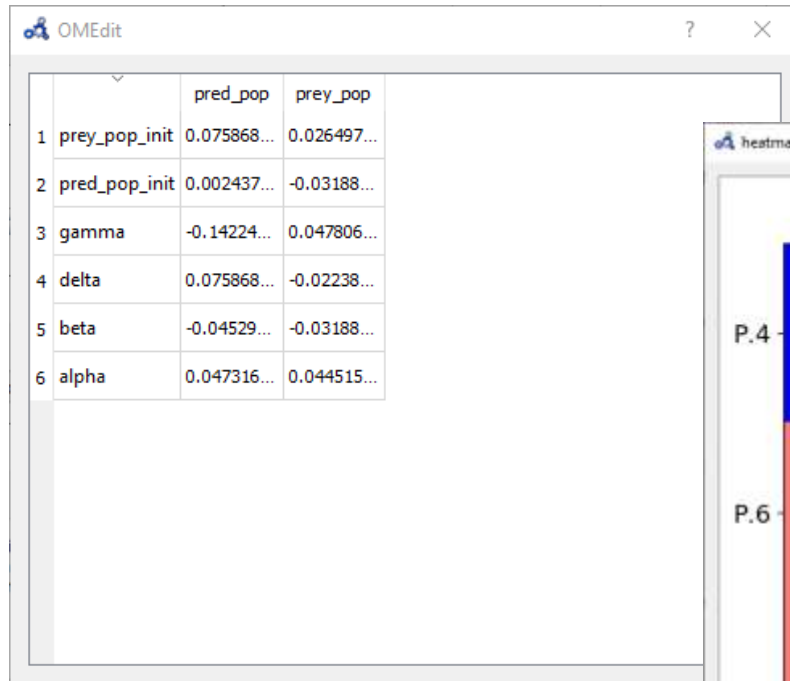

	pred_pop	prey_pop
1 prey_pop_init	0.075868...	0.026497...
2 pred_pop_init	0.002437...	-0.03188...
3 gamma	-0.14224...	0.047806...
4 delta	0.075868...	-0.02238...
5 beta	-0.04529...	-0.03188...
6 alpha	0.047316...	0.044515...

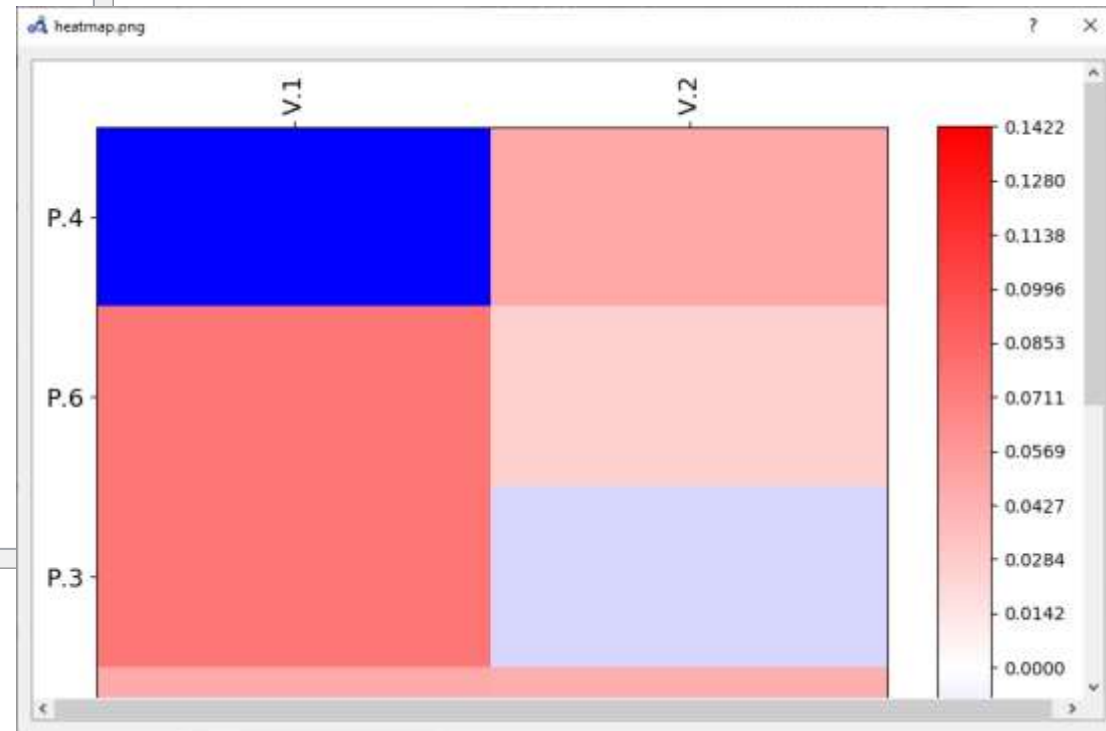

Part Vb
More
Graphical Modeling Exercises


using
OpenModelica

Graphical Modeling - Using Drag and Drop Composition

The screenshot displays the OMEdit - OpenModelica Connection Editor interface for a DC motor model. The central workspace shows a circuit diagram with a step input source (startTime=0) connected to a resistor (resistor1) and an inductor (inductor1) in series. The circuit is connected to a motor component (motor1) which is grounded (ground1). The Variables Browser on the right shows the following variables and their values:

Variable	Value	Unit
DCMotor		
emf		
der(phi)	-0.3403	deg
fixed		
flange		
i	-0.533507	A
internalSupport		
k	1.0	N.m/
n		
p		
phi		deg
useSupport	0	
v	-0.3403	V
w	-0.3403	rad/s
ground1		
inductor1		

Graphical Modeling Animation – DCMotor

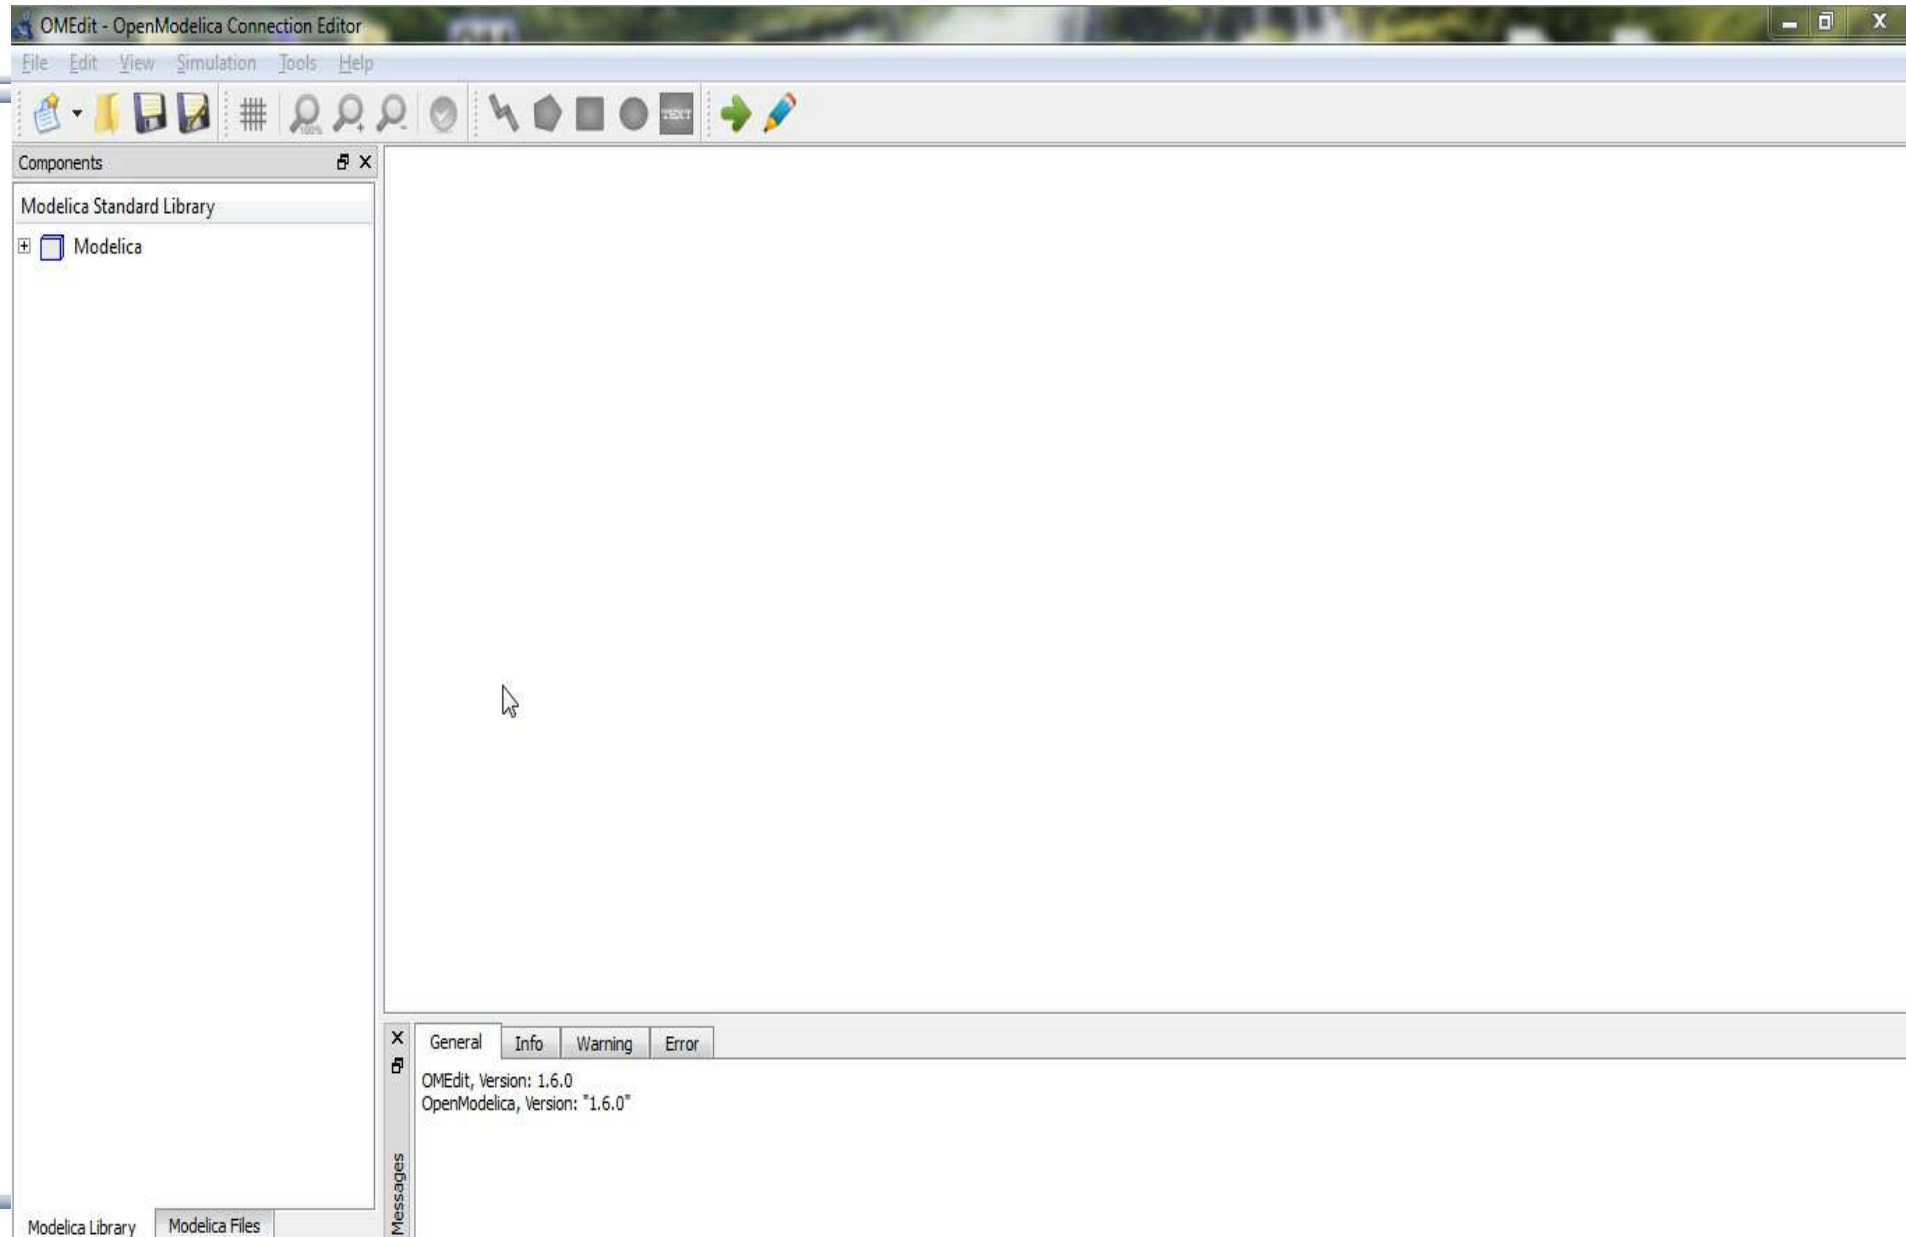

Multi-Domain (Electro-Mechanical) Modelica Model

- A DC motor can be thought of as an electrical circuit which also contains an electromechanical component

model DCMotor

```
Resistor R(R=100);
```

```
Inductor L(L=100);
```

```
VsourceDC DC(f=10);
```

```
Ground G;
```

```
ElectroMechanicalElement EM(k=10,J=10, b=2);
```

```
Inertia load;
```

equation

```
connect(DC.p,R.n);
```

```
connect(R.p,L.n);
```


```
connect(L.p,EM.n);
```

```
connect(EM.p,DC.n);
```

```
connect(DC.n,G.p);
```

```
connect(EM.flange,load.flange);
```

end DCMotor

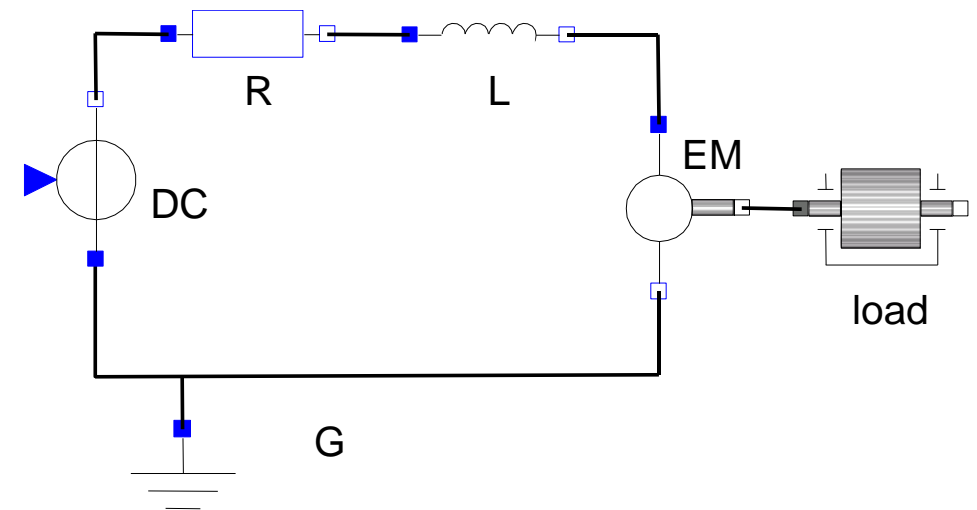

Corresponding DCMotor Model Equations

The following equations are automatically derived from the Modelica model:

$0 == DC.p.i + R.n.i$	$EM.u == EM.p.v - EM.n.v$	$R.u == R.p.v - R.n.v$
$DC.p.v == R.n.v$	$0 == EM.p.i + EM.n.i$	$0 == R.p.i + R.n.i$
	$EM.i == EM.p.i$	$R.i == R.p.i$
$0 == R.p.i + L.n.i$	$EM.u == EM.k * EM.\omega$	$R.u == R.R * R.i$
$R.p.v == L.n.v$	$EM.i == EM.M / EM.k$	
	$EM.J * EM.\omega == EM.M - EM.b * EM.\omega$	$L.u == L.p.v - L.n.v$
$0 == L.p.i + EM.n.i$		$0 == L.p.i + L.n.i$
$L.p.v == EM.n.v$	$DC.u == DC.p.v - DC.n.v$	$L.i == L.p.i$
	$0 == DC.p.i + DC.n.i$	$L.u == L.L * L.i'$
$0 == EM.p.i + DC.n.i$	$DC.i == DC.p.i$	
$EM.p.v == DC.n.v$	$DC.u == DC.Amp * Sin[2 \pi DC.f * t]$	
$0 == DC.n.i + G.p.i$		
$DC.n.v == G.p.v$		


(load component not included)

Automatic transformation to ODE or DAE for simulation:

$$\frac{dx}{dt} == f[x, u, t] \quad g\left[\frac{dx}{dt}, x, u, t\right] == 0$$


Exercise 3.1

- Draw the `DCMotor` model using the graphic connection editor using models from the following Modelica libraries:
`Mechanics.Rotational.Components`,
`Electrical.Analog.Basic`,
`Electrical.Analog.Sources` - `signalVoltage`
`Step` in `Blocks.Sources`
- Simulate it for 15s and plot the variables for the outgoing rotational speed on the inertia axis and the voltage on the voltage source in the same plot.

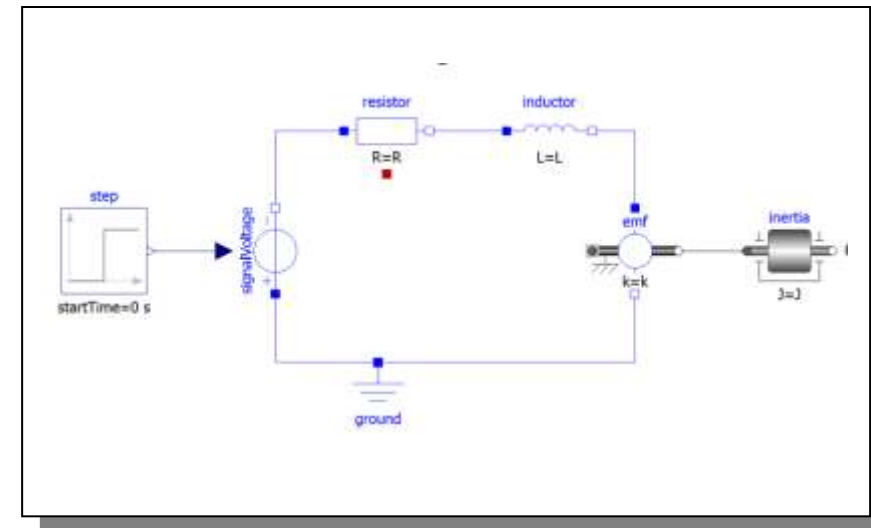


Exercise 3.2

- If there is enough time: Add a torsional spring to the outgoing shaft and another inertia element. Simulate again and see the results. Adjust some parameters to make a rather stiff spring.


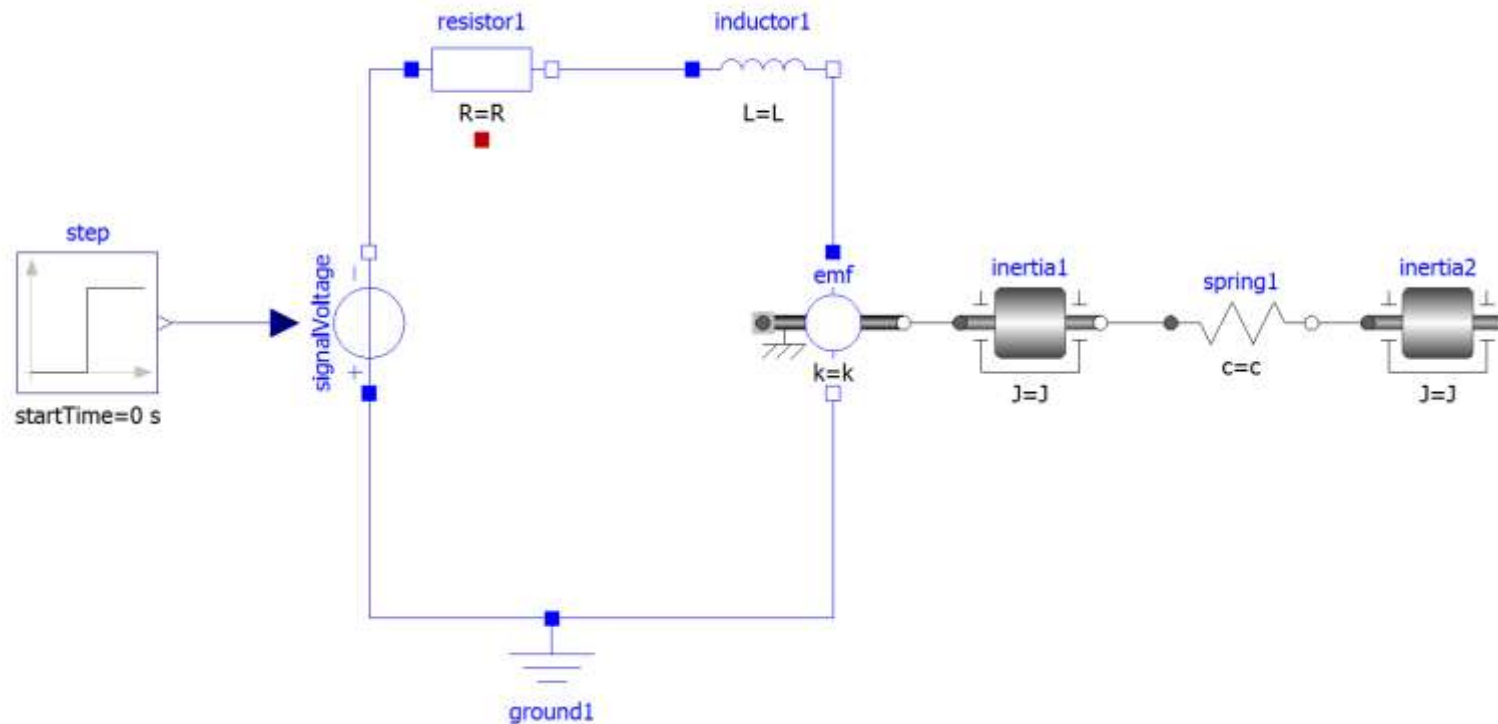


Exercise 3.3

- If there is enough time: Add a PI controller to the system and try to control the rotational speed of the outgoing shaft. Verify the result using a step signal for input. Tune the PI controller by changing its parameters in OMEdit.

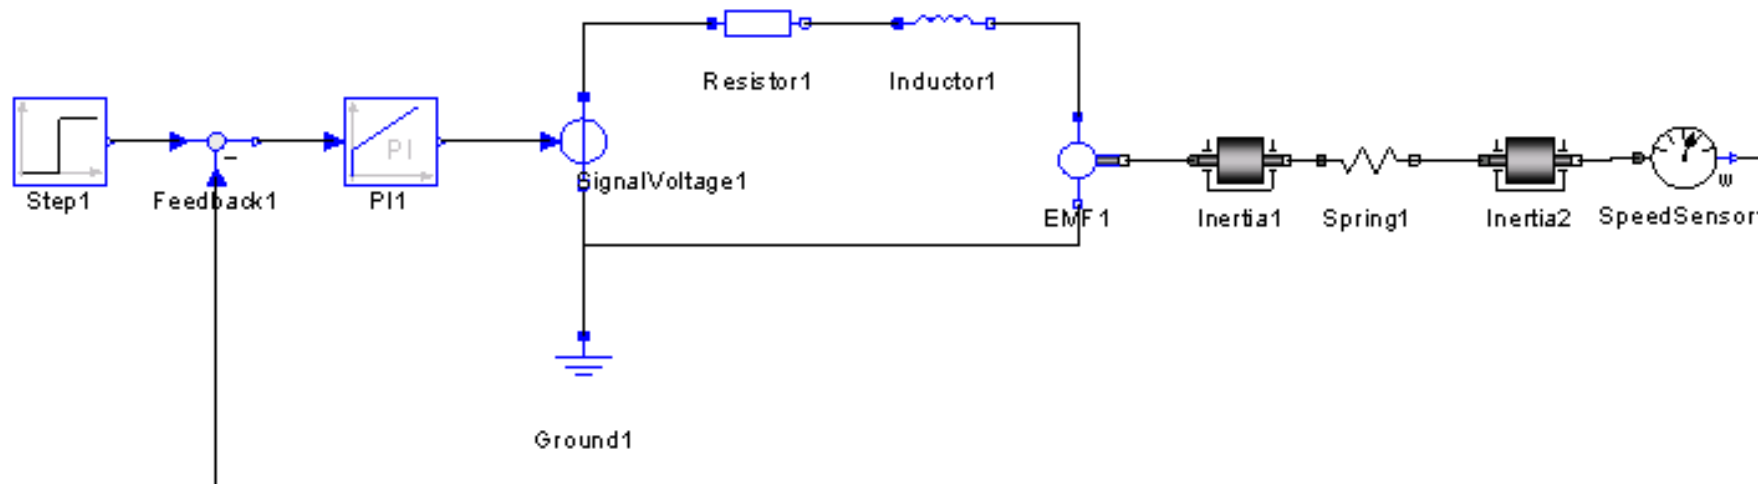

Learn more...

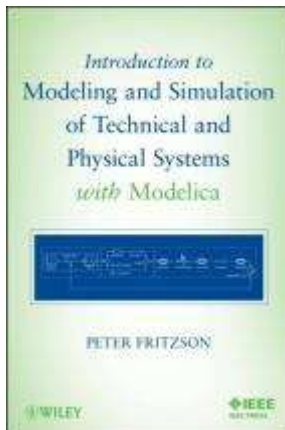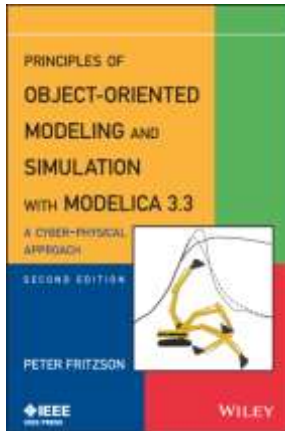

- OpenModelica
 - www.openmodelica.org
- Modelica Association
 - www.modelica.org
- Books
 - Principles of Object Oriented Modeling and Simulation with Modelica 3.3: A Cyber-Physical Approach, Peter Fritzson 2015.
 - Modeling and Simulation of Technical and Physical Systems with Modelica. Peter Fritzson., 2011
<http://eu.wiley.com/WileyCDA/WileyTitle/productCd-111801068X.html>
 - Introduction to Modelica, Michael Tiller


Summary

Multi-Domain
Modeling

Typed
Declarative
Textual Language


M O D E L I C A

www.OpenModelica.org
OpenModelica@ida.liu.se

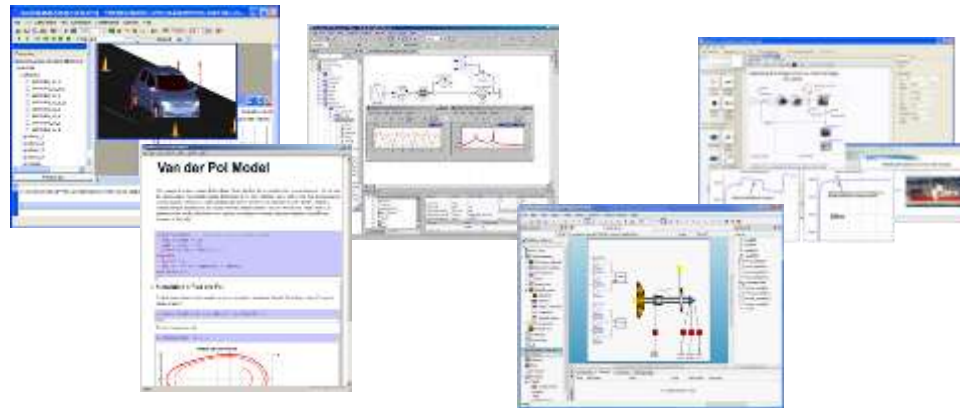

Thank you for listening!

Visual Acausal
Component
Modeling

Hybrid
Modeling